


LWAA-230 Serise





Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

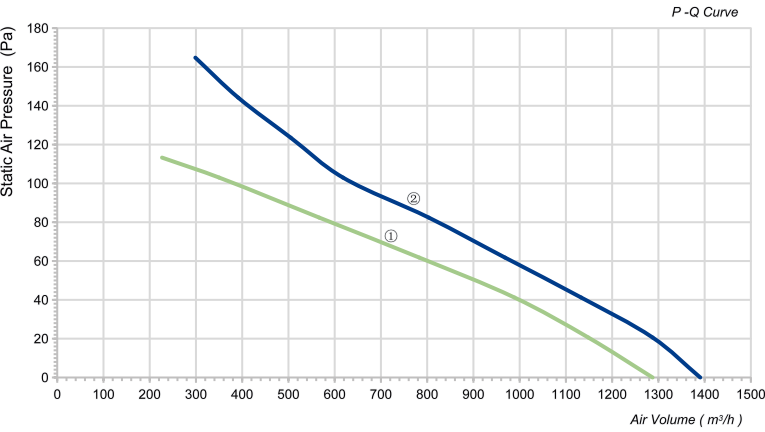


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2D230S-5MNW-01	380/400	50	0.23	90	2700	1288	/	59	①
LWAA2D230S-5MNW-02	380/400	60	0.22	120	2950	1391	/	61	②

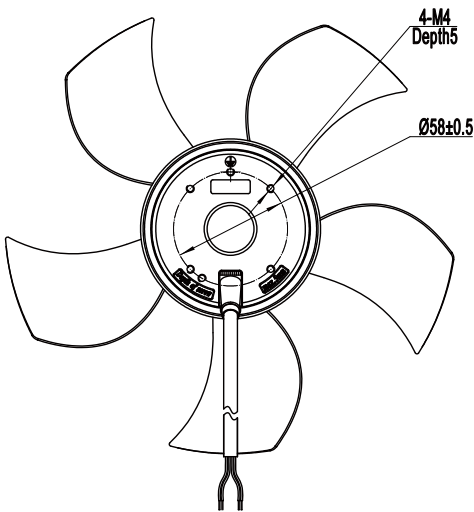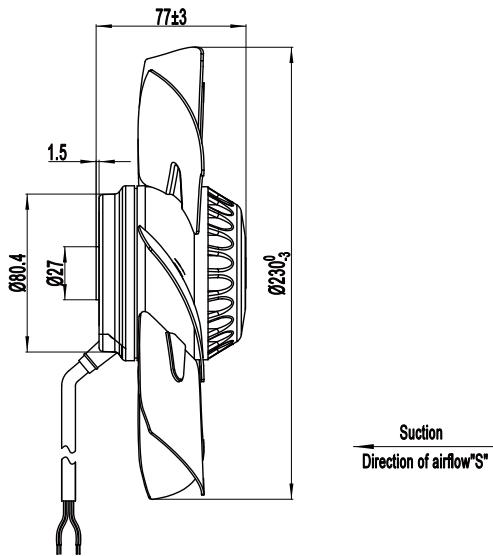

LWAA-250 Serise

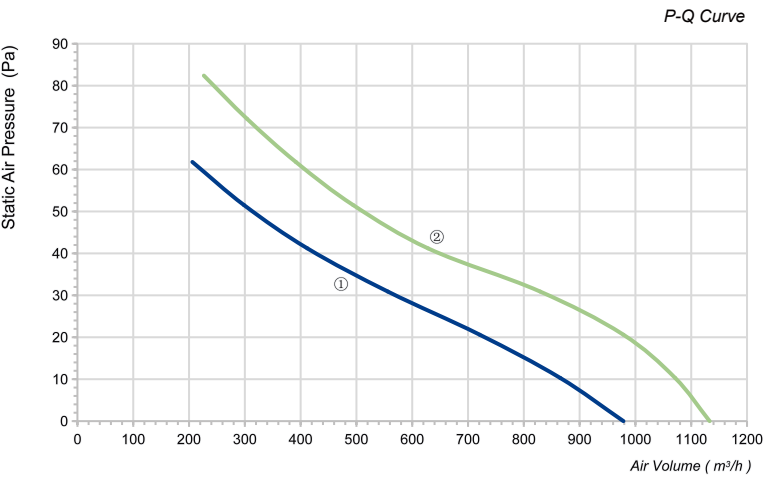

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E250B-7MKB-18	220/230	50	0.25	50	1400	979	2	53	①
LWAA4E250B-7MKB-19	220/230	60	0.27	60	1650	1133	2	54	②

