


LWAA-200 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

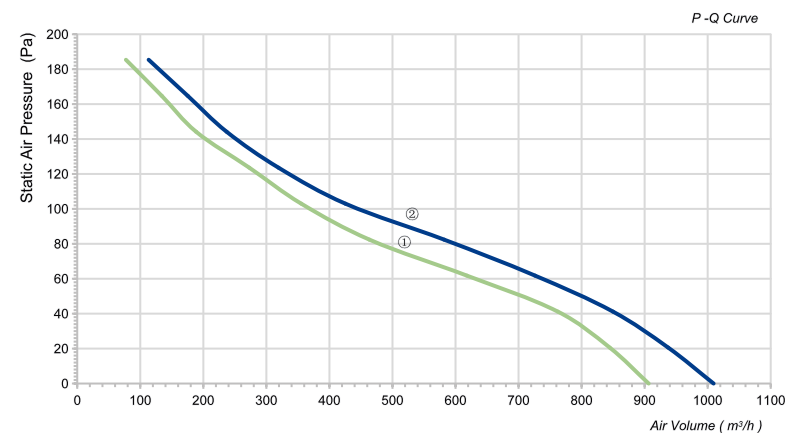


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2E200S-7MEB-03	220/230	50	0.3	65	2300	906	2	53	①
LWAA2E200S-7MEB-04	220/230	60	0.34	80	2600	1009	2	55	②
LWAA2D200S-7MEB-05	380/400	50	0.6	65	2300	906	/	53	①
LWAA2D200S-7MEB-06	380/400	60	0.13	70	2400	1009	/	55	②

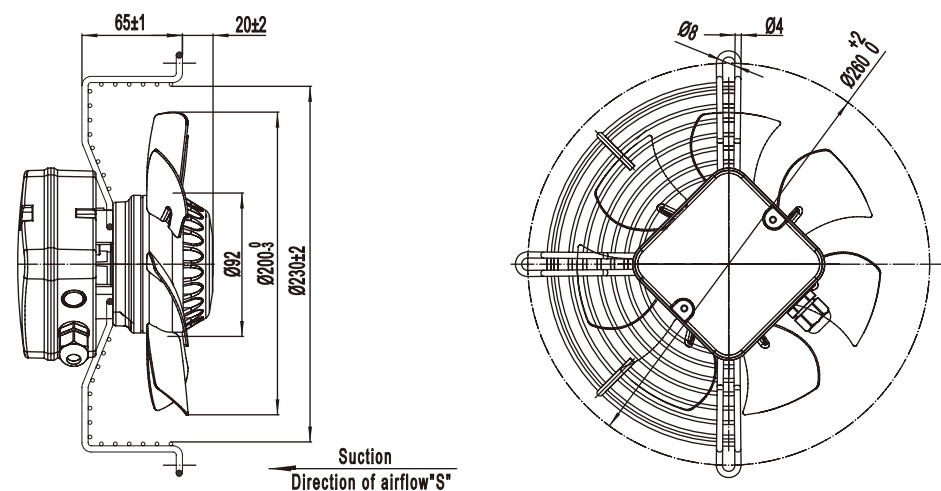

LWAA-200 Serise

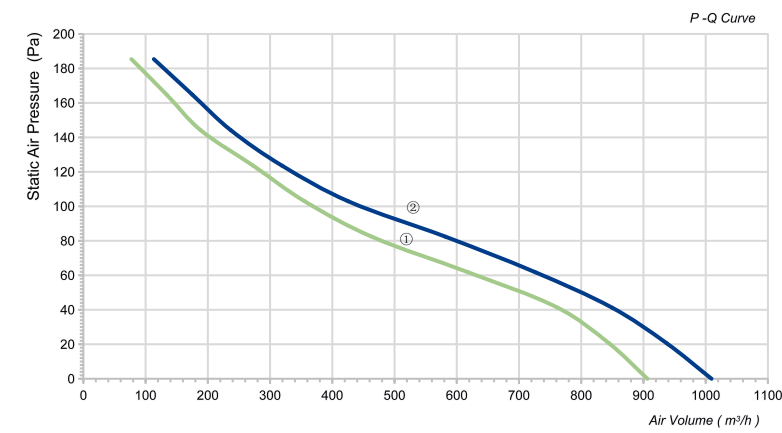

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA2E200S-7MKW-07	220/230	50	0.3	60	2250	906	2	58	①
LWAA2E200S-7MKW-08	220/230	60	0.34	75	2800	1009	2	60	②
LWAA2D200S-7MKW-09	380/400	50	0.16	65	2300	906	/	58	①
LWAA2D200S-7MKW-10	380/400	60	0.13	70	2400	1009	/	60	②

