

LWAA4D-550 Series

Axial Fan Used for Refrigerator




Product Characteristic

- Voltage : Three-phase,380V/50Hz
- Relative humidity: 90%
- Working mode: S1
- Insulation class: B/F
- Altitude: ≤1000m;
- Average use life: ≥30,000hours
- Protection level: IP44,IP54
- Ambient temperature: between -30 ℃ and 60 ℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Input Power (W)	Speed (RPM)	Static Pressure (Pa)	Air Volume (m³/h)	Total Pressure (Pa)
LWAA4D-550-01	380	50	2.3	1158	1382	200	4560	239
LWAA4D-550-02	380	50	2.14	983	1375	140	7321	162
LWAA4D-550-03	380	50	2.08	936	1398	100	8872	152
LWAA4D-550-04	380	50	2.0	831	1413	60	9981	129
LWAA4D-550-05	380	50	2.0	802	1425	0	10500	56

Product Drawing (mm)

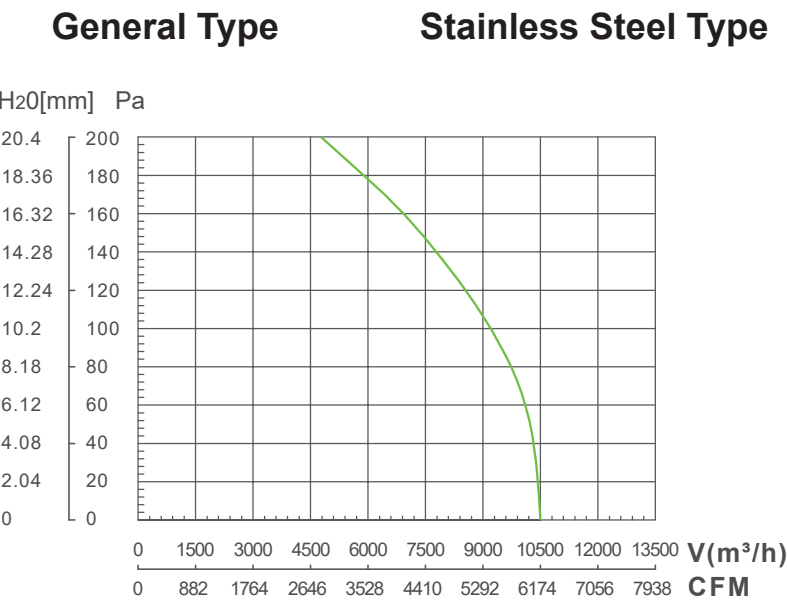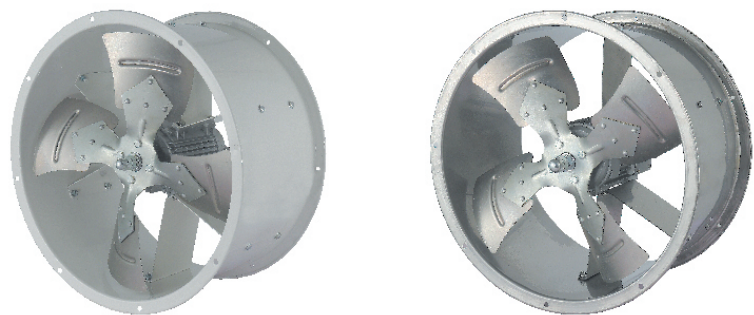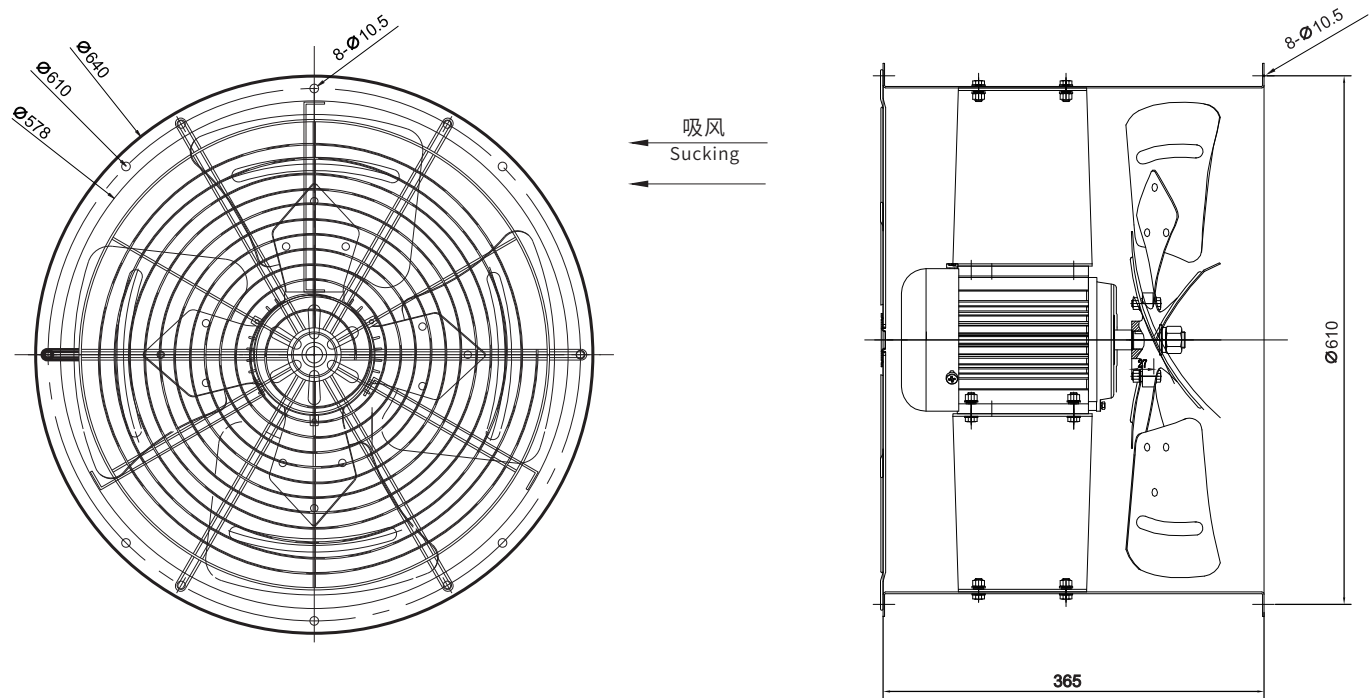

LWAA4D-600 Series

Axial Fan Used for Refrigerator

Product Characteristic

- Voltage : Three-phase,380V/50Hz
- Relative humidity: 90%
- Working mode: S1
- Insulation class: B/F
- Altitude: ≤1000m;
- Average use life: ≥30,000hours
- Protection level: IP44,IP54
- Ambient temperature: between -30 ℃ and 60 ℃

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Input Power (W)	Speed (RPM)	Static Pressure (Pa)	Air Volume (m³/h)	Total Pressure (Pa)	Cure
LWAA4D-600-01	380	50	2.96	1519	1432	200	6136	245	①
LWAA4D-600-02	380	50	2.9	1384	1435	140	7435	169	①
LWAA4D-600-03	380	50	2.85	1276	1438	100	10570	156	①
LWAA4D-600-04	380	50	2.8	1104	1443	61	11833	130	①
LWAA4D-600-05	380	50	2.7	1064	1445	0	13244	87	①
LWAA4D-600-06	380	50	3.7	1888	1400	200	7352	243	②
LWAA4D-600-07	380	50	3.6	1677	1425	140	8536	166	②
LWAA4D-600-08	380	50	3.5	1508	1445	100	11552	150	②
LWAA4D-600-09	380	50	3.4	1438	1449	61	13982	133	②
LWAA4D-600-10	380	50	3.3	1335	1458	0	15215	70	②

Product Drawing (mm)

