


LWAA-400 Serise




Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP54 |
| • Number of Blades: | 5 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -40 °C ~+60 °C |

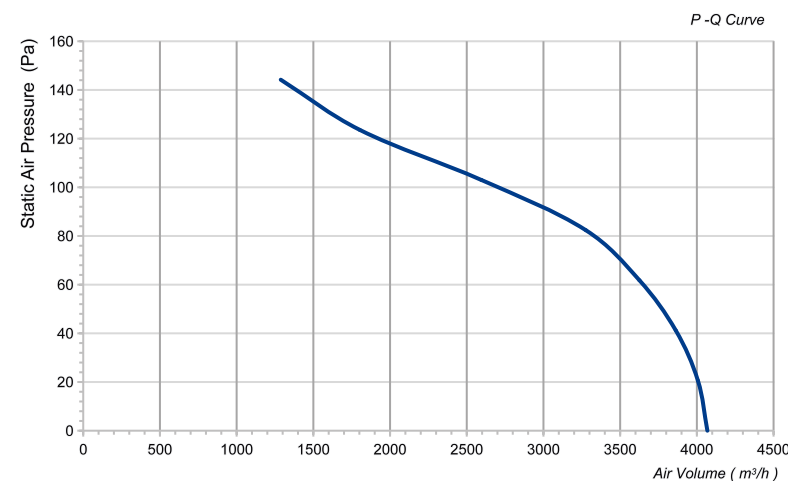


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D400S-5MEW-22	380	50	0.5	180	1400	4069	/	/	/

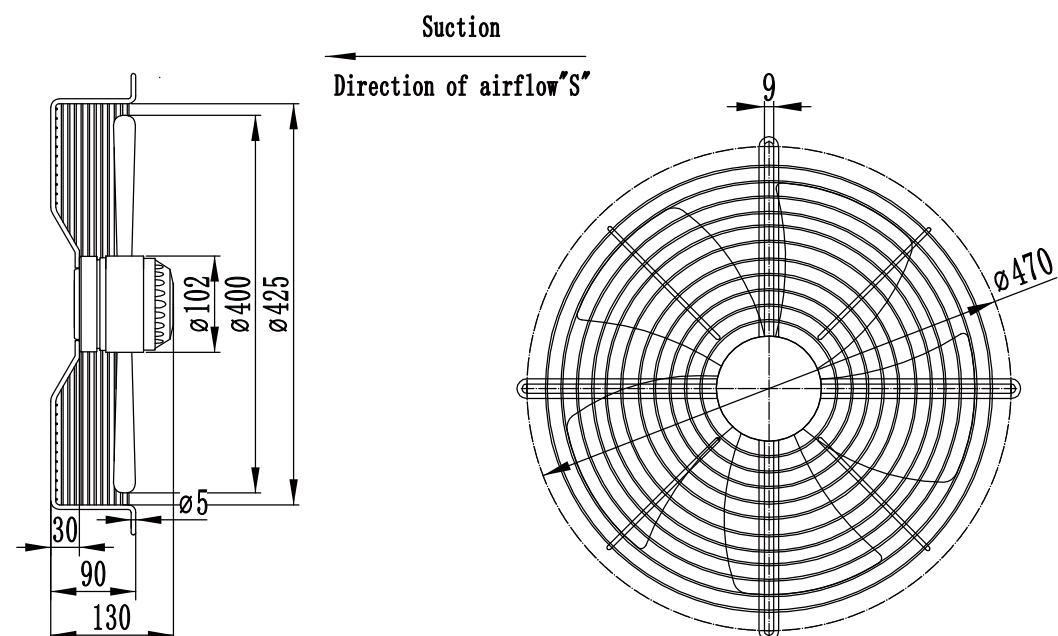

LWAA-450 Serise

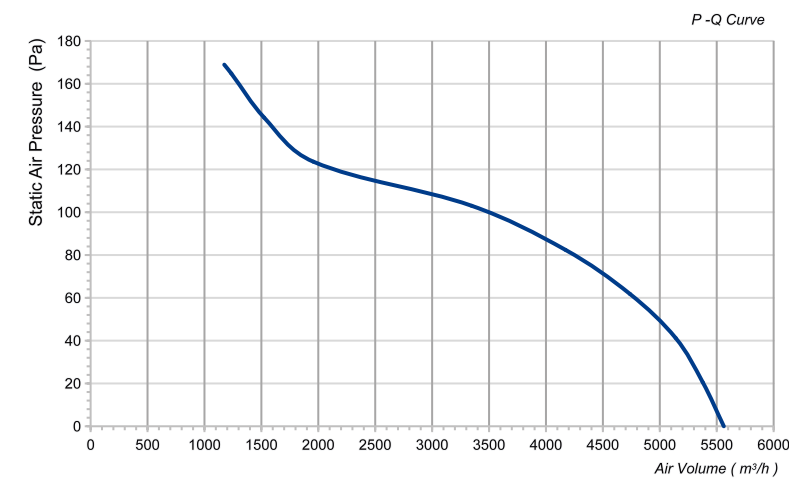

Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP44 |
| • Number of Blades: | 5 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -40 °C ~+60 °C |



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450S-5MEW-22	220	50	1.2	280	1350	5562	/	/	/

