


LWAA-500 Serise




Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|-----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP54 |
| • Number of Blades: | 5 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -40 °C ~ +60 °C |

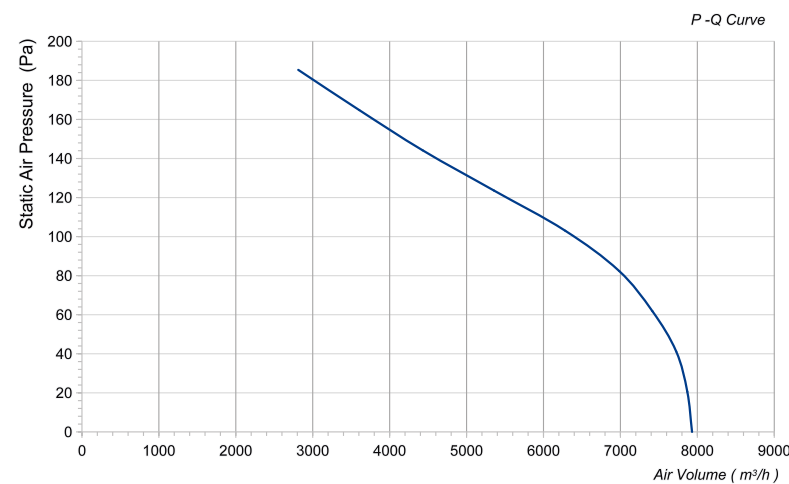


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D500S-5MEW-13	380	50	1.1	450	1390	7931	/	/	/

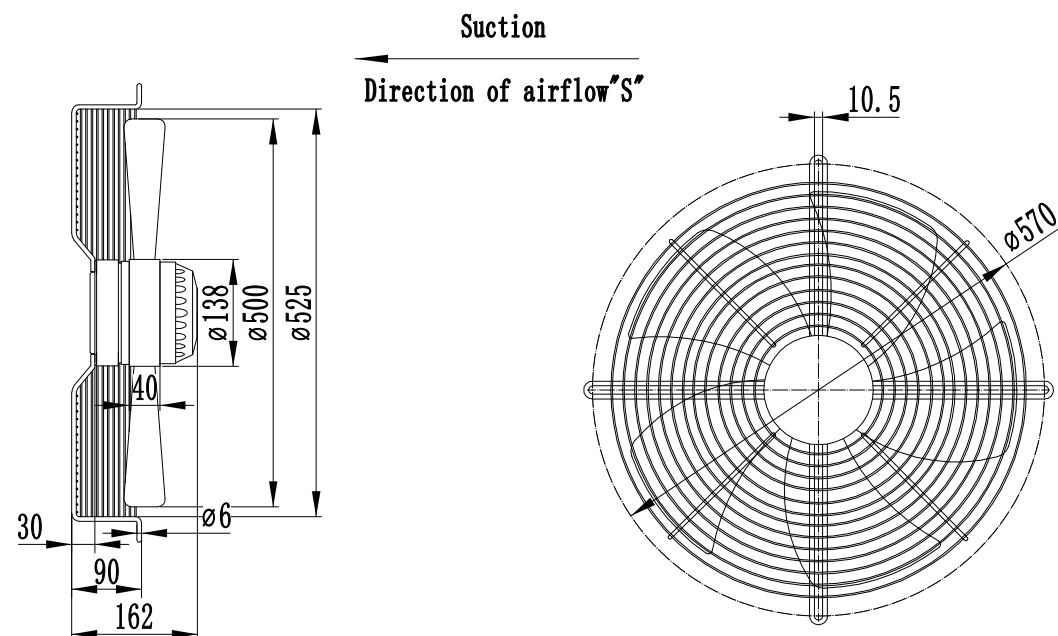

LWAA-550 Serise

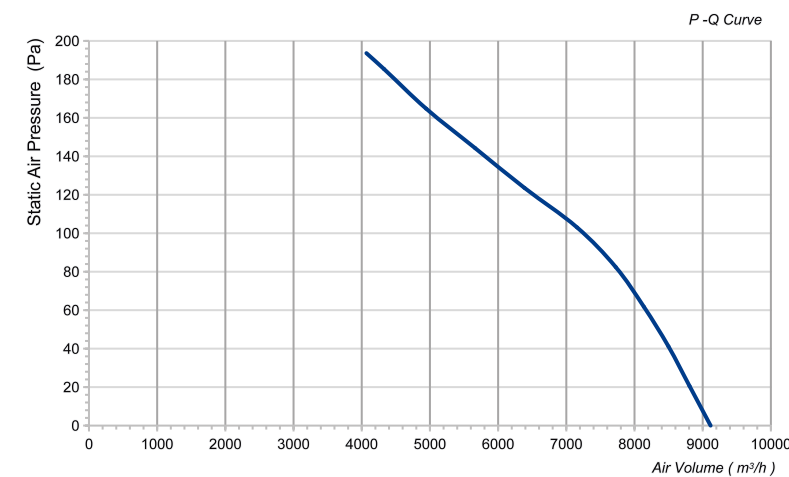

Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|-----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP44 |
| • Number of Blades: | 5 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -40 °C ~ +60 °C |



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D550S-5MEW-09	380	50	1.5	650	1350	9116	/	/	/

