


LWAA-500 Serise





Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

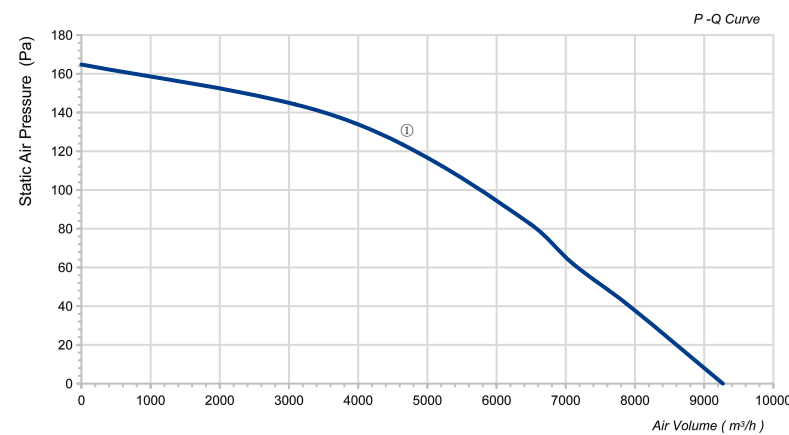


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D500S-7MKB-11	380/400	50	1.65	800	1350	9270	/	80	①

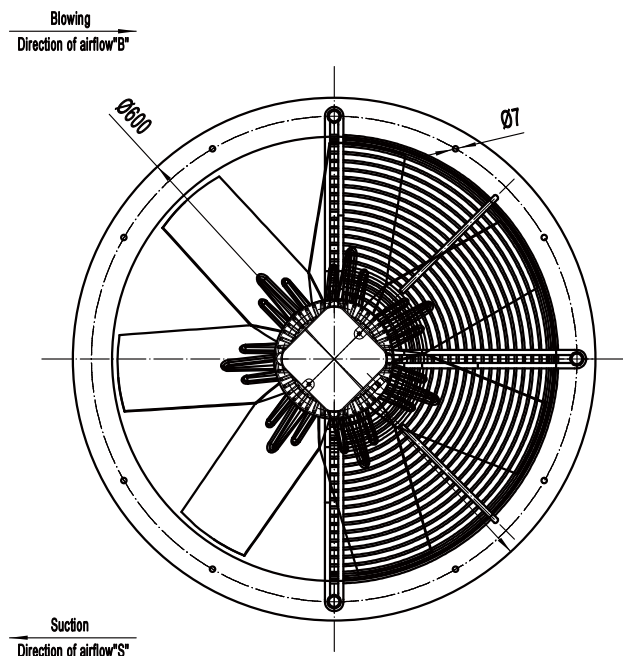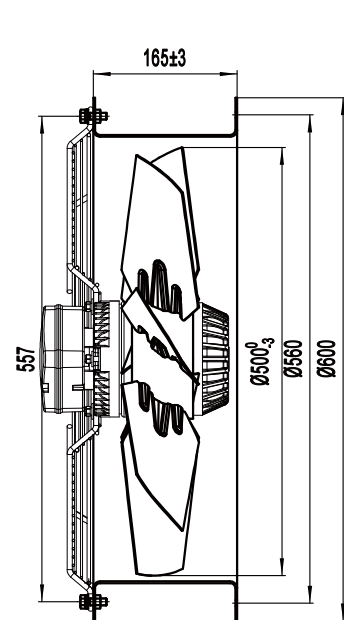

LWAA-550 Serise

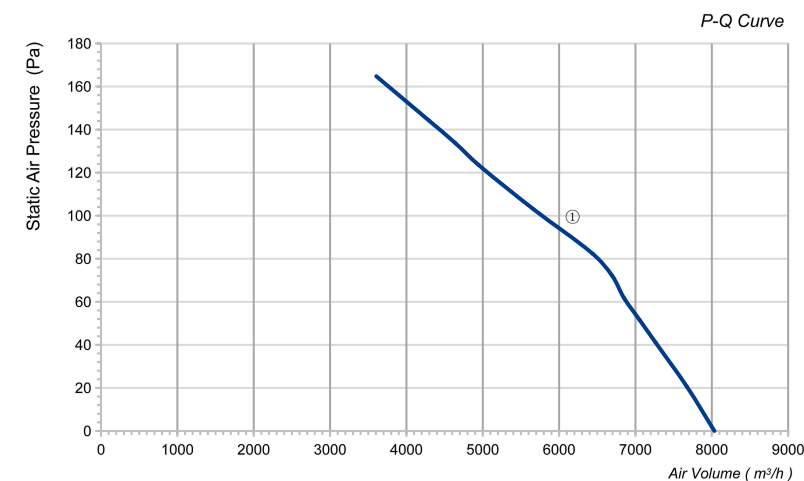


Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D550S-5MKB-10	380	50	1.1	550	1330	8034	/	73	①

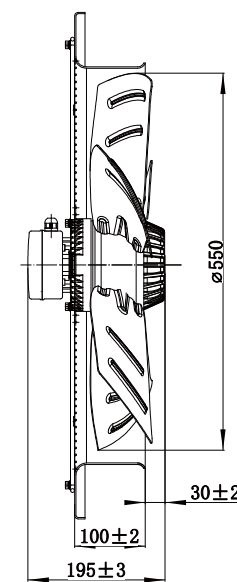

Suction
Direction of airflow "S"

