


LWAA-630 Serise




Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|-----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP54 |
| • Number of Blades: | 7 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 °C ~ +60 °C |

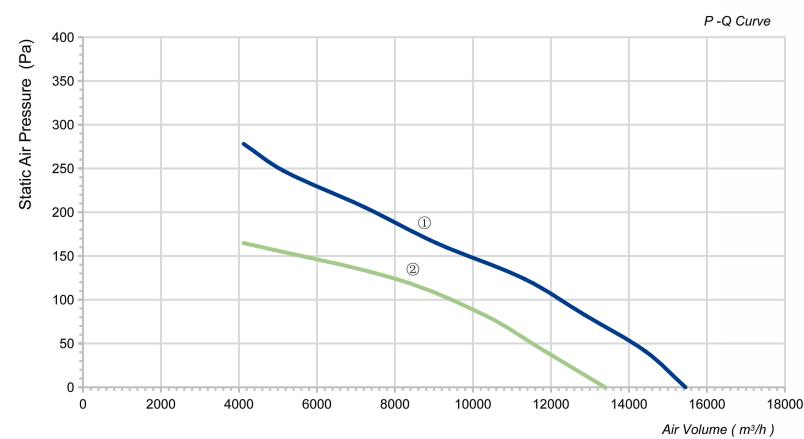


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D630S-7MKB-08	380/400	50	3	1550	1400	15450	/	76	①
	380/400	50	2	1250	1150	13390	/	74	②

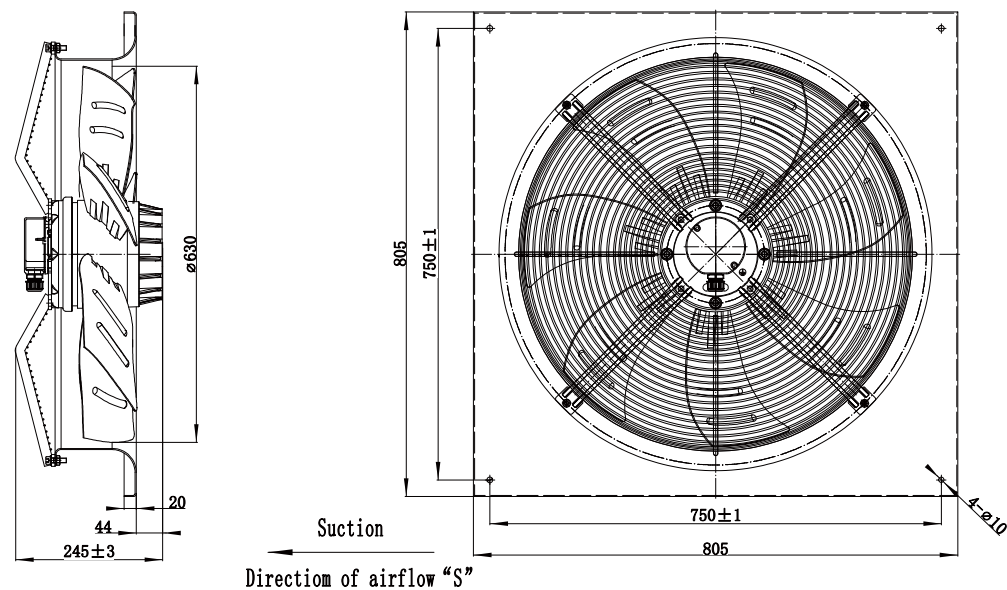

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAA-630 Serise

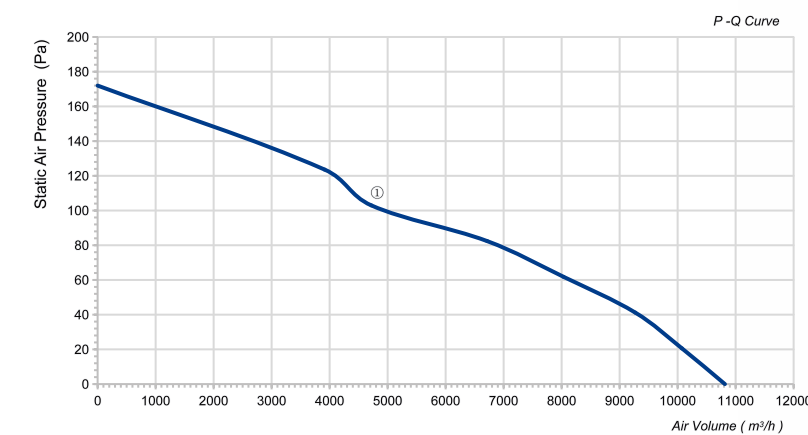

RECOMMEND


Product Characteristic

- | | | | |
|----------------------|-------------------|--------------------------|-----------------|
| • Blades : | Cold rolled steel | • Type of Protection: | IP54 |
| • Number of Blades: | 4 | • Insulation Class: | F |
| • Mode of Operation: | S1 | • Operation Temperature: | -30 °C ~ +60 °C |



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA6E630S-4MKB-09	230	50	2	450	925	10815	12	68	①

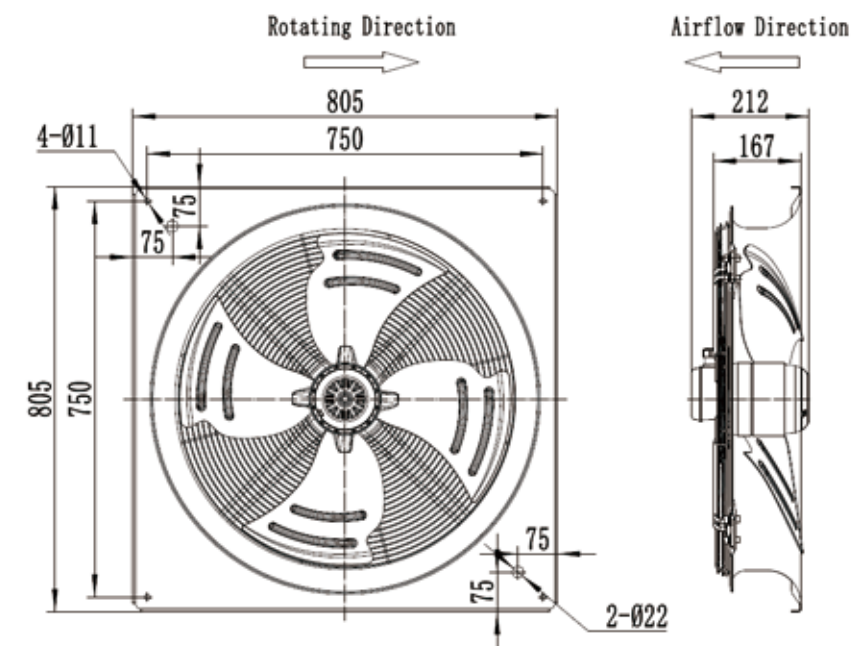

zakaz@ventilatorry.ru +7 (495) 133-95-09