


LWAA-295 Serise





Product Characteristic

- Blades : Plastic PA66
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

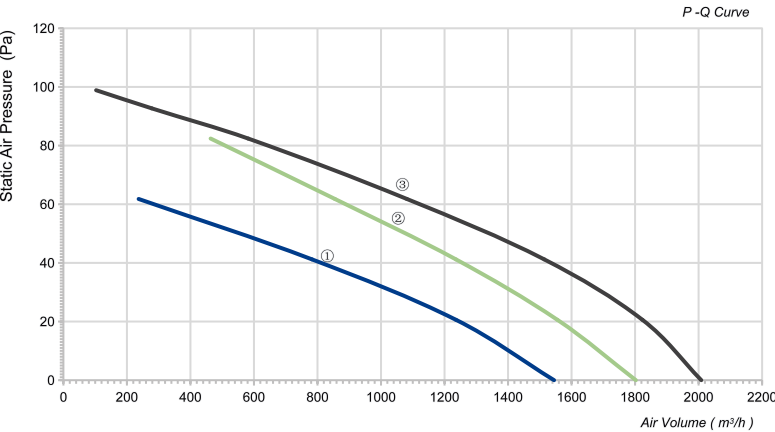


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E295S-5PNW-01	220/230	50	0.3	65	1200	1545	2	45	①
LWAA4E295S-5PNW-02	220/230	50	0.4	80	1400	1597	3	48	①
LWAA4D295S-5PNW-03	380/400	50	0.19	75	1330	1803	/	49	②
LWAA4D295S-5PNW-04	380/400	60	0.17	90	1450	2009	/	50	③

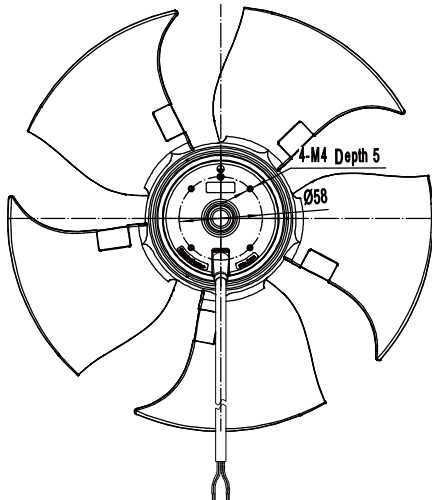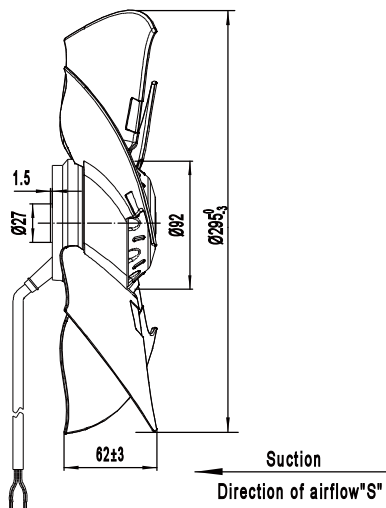

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAA-300 Serise

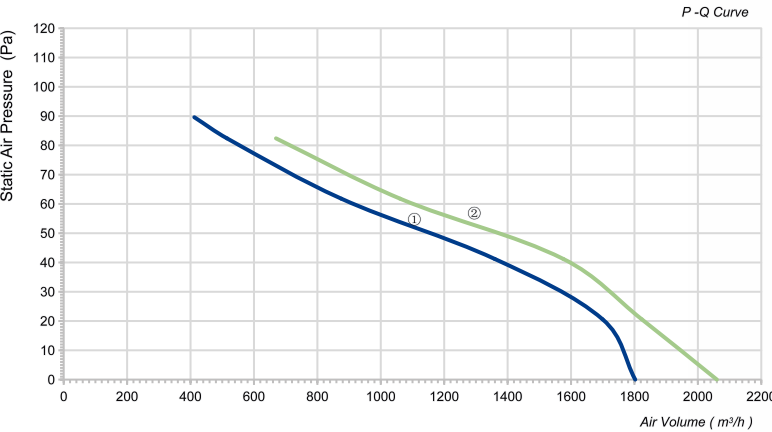



Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP44
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E300S-5MKB-13	220/230	50	0.42	90	1350	1803	3	54	①
LWAA4E300S-5MKB-14	220/230	60	0.51	115	1600	2060	3	55	②

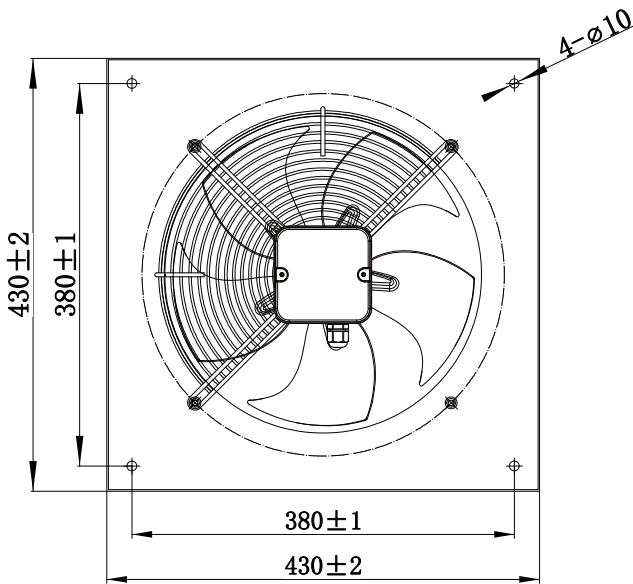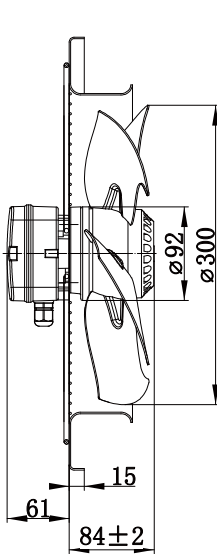

zakaz@ventilatorry.ru +7 (495) 133-95-09