


LWAA-400 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: F
- Operation Temperature: -30 ℃ ~ +60 ℃

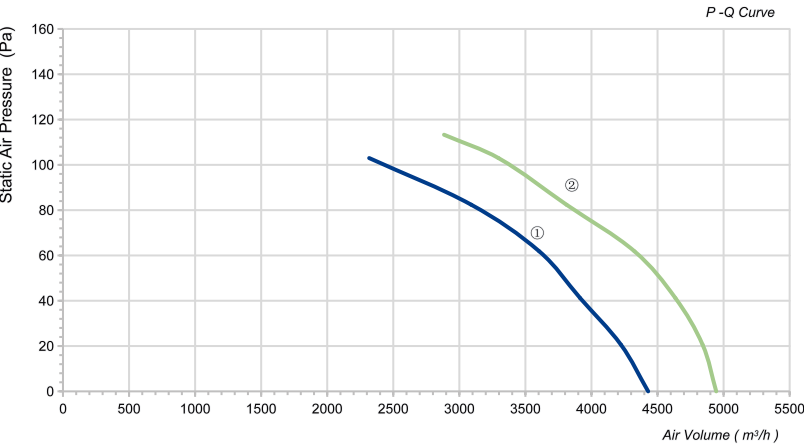


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E400S-5MEB-13	220/230	50	1.1	225	1380	4429	6	58	①
LWAA4E400S-5MEB-14	220/230	60	1.15	310	1400	4893	6	60	②
LWAA4D400S-5MEB-15	380/400	50	0.52	225	1380	4429	/	58	①
LWAA4D400S-5MEB-16	380/400	60	0.6	310	1400	4893	/	60	②

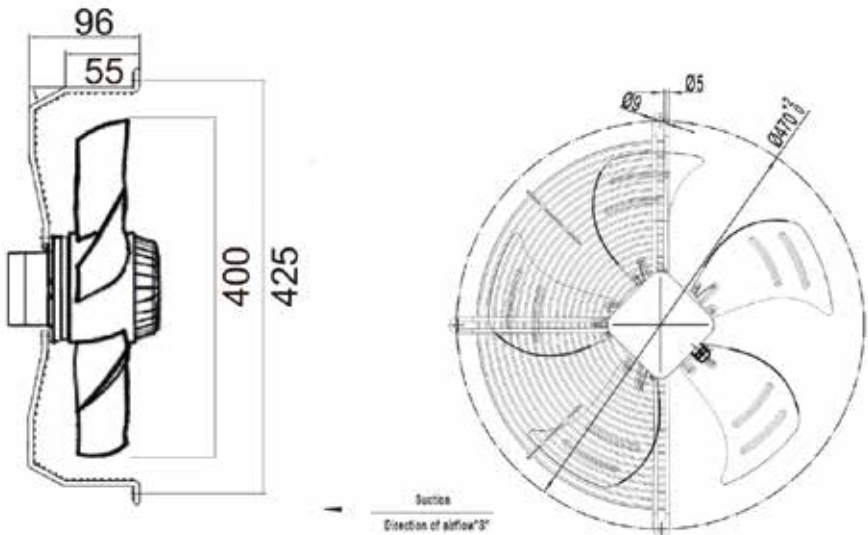

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAA-400 Serise

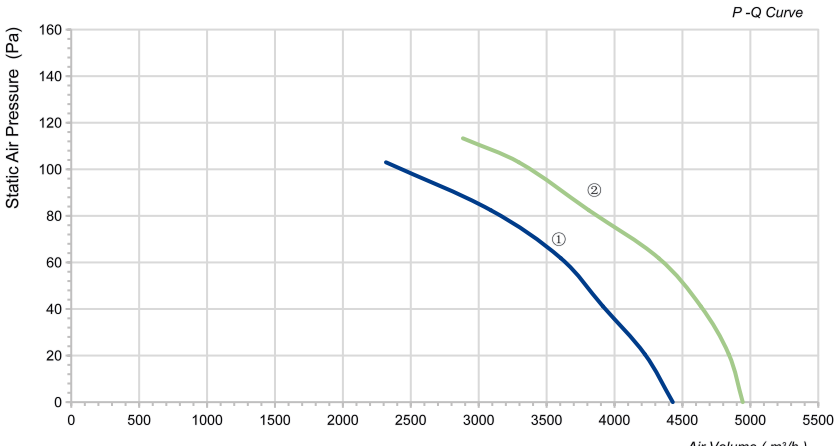


Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: F
- Operation Temperature: -30 ℃ ~ +60 ℃



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E400S-5MKB-17	220/230	50	1.1	225	1380	4429	6	58	①
LWAA4E400S-5MKB-18	220/230	60	1.15	310	1400	4893	6	60	②
LWAA4D400S-5MKB-19	380/400	50	0.52	225	1380	4429	/	58	①
LWAA4D400S-5MKB-20	380/400	60	0.6	310	1400	4893	/	60	②

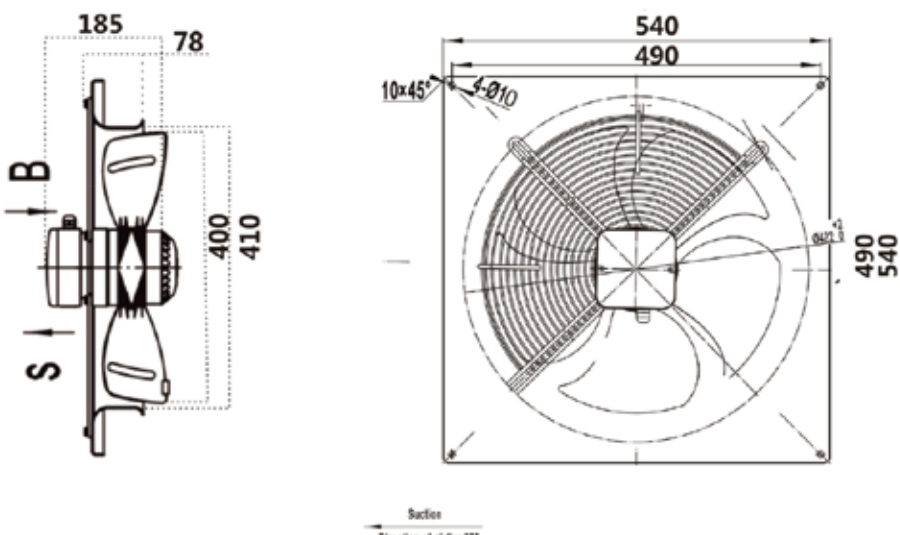

zakaz@ventilatorry.ru +7 (495) 133-95-09