


LWAA-400 Serise





Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

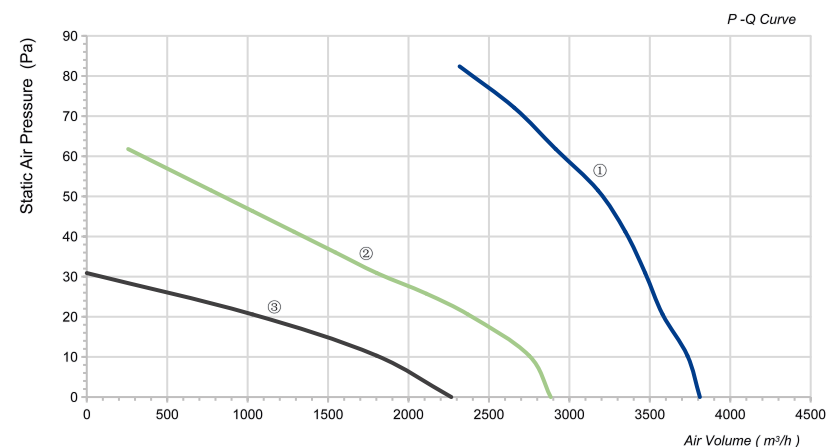


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E400S-5MEB-21	220/230	50	0.9	180	1350	3811	6	59	①
	220/230	50	0.6	135	1050	2884	6	52	②
	220/230	50	0.5	100	800	2266	6	46	③

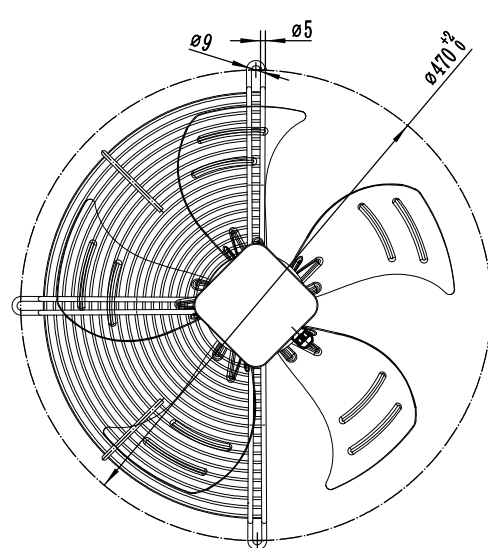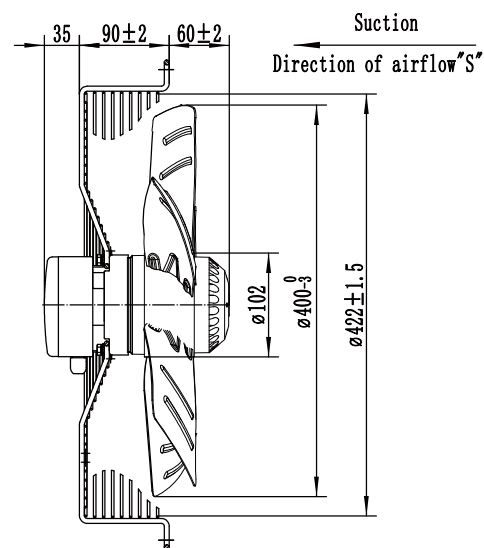

LWAA-400 Serise

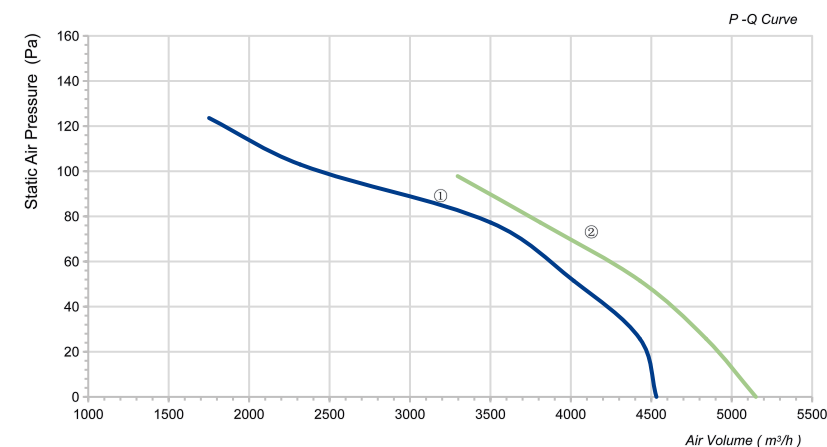


Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E400S-5MEB-09	220/230	50	1.1	230	1350	4532	7	62	①
LWAA4E400S-5MEB-10	220/230	60	1.2	280	1600	5150	7	64	②
LWAA4D400S-5MEB-11	380/400	50	0.5	230	1350	4532	/	62	①
LWAA4D400S-5MEB-12	380/400	60	0.6	280	1600	5150	/	64	②

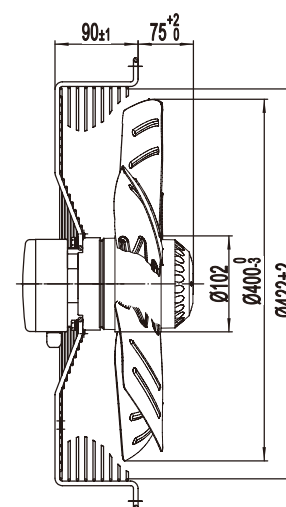

Suction
Direction of airflow "S"

