


LWAA-420 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~+60 C

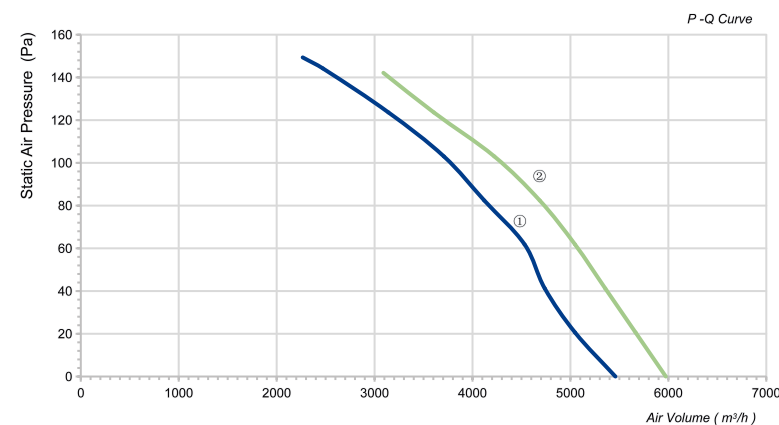


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E420S-5MEB-01	220/230	50	1.5	300	1350	5459	8	65	①
LWAA4E420S-5MEB-02	220/230	60	1.8	400	1580	5974	8	68	②
LWAA4D420S-5MEB-03	380/400	50	0.65	280	1370	5459	/	65	①
LWAA4D420S-5MEB-04	380/400	60	0.9	380	1600	5974	/	68	②

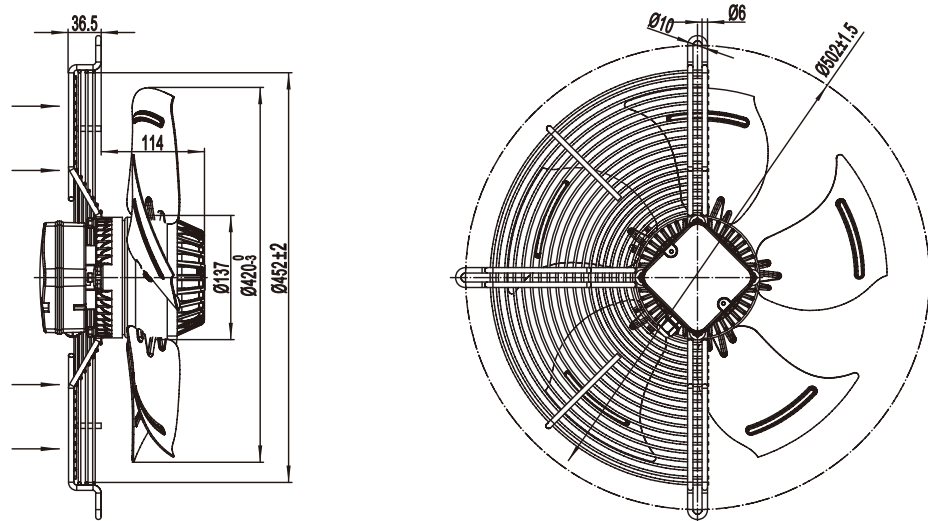

LWAA-450 Serise

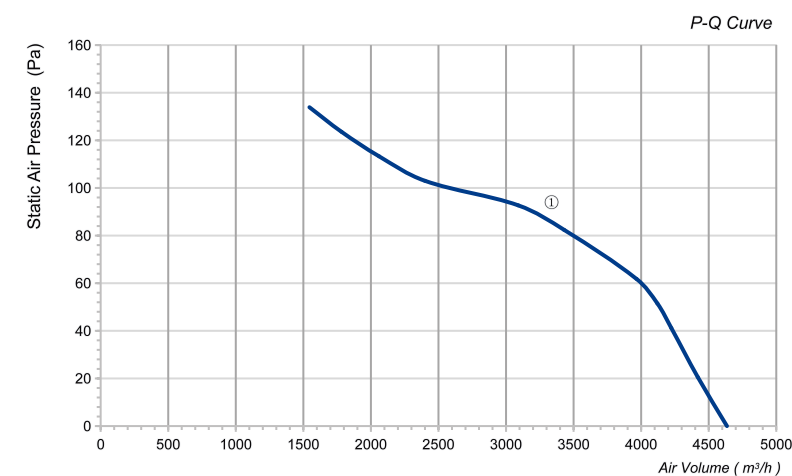

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 C ~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450B-5MKB-22	220/230	50	1.1	250	1350	4635	7	62	①

