


LWAA-450 Serise





Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

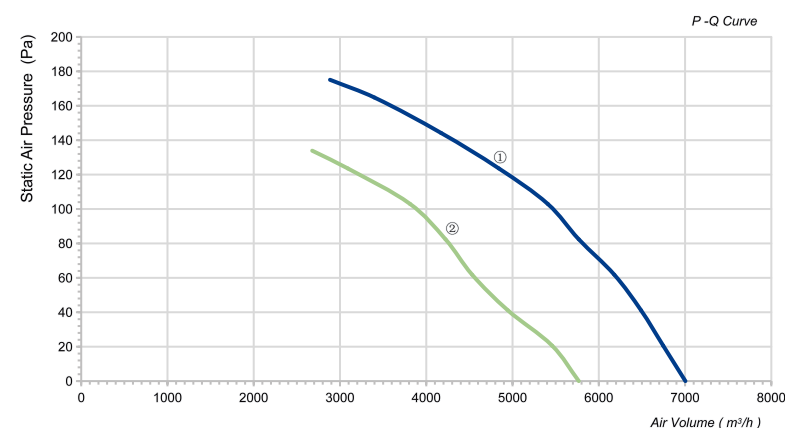


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450S-5MEB-09	220/230	50	2.2	480	1350	7004	16	66	①
LWAA4D450S-5MEB-10	380/400	60	1.15	480	1350	7004	/	66	①
LWAA4E450S-5MEB-11	220/230	50	1.75	380	1350	5768	10	64	②
LWAA4D450S-5MEB-12	380/400	60	0.8	380	1350	5768	/	64	②

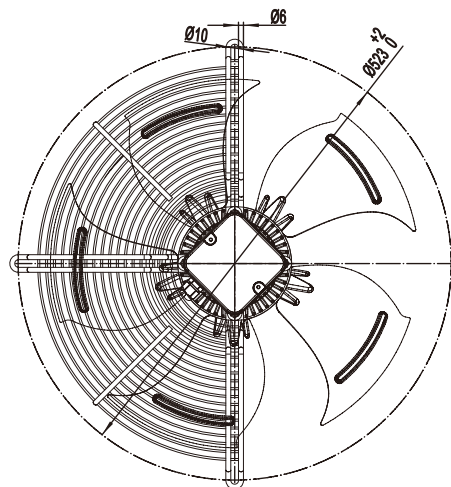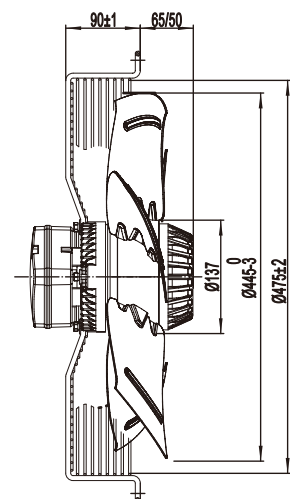

Section
Direction of airflow"

LWAA-450 Serise

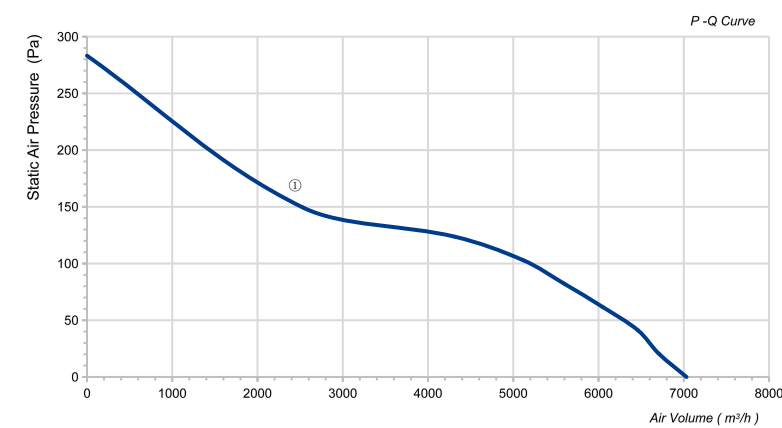

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450S-5MEB-13	230	50	1.8	400	1420	7025	16	72	①

Rotating Direction



Airflow Direction

