


LWAA-450 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: F
- Operation Temperature: -30 C ~+60 C

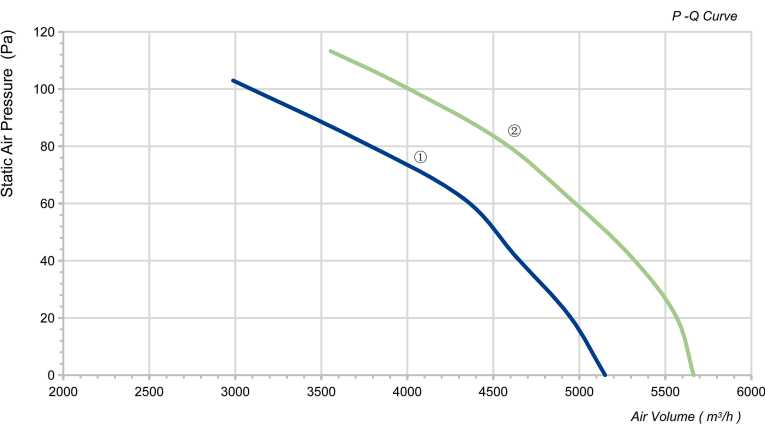


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450S-5MEB-14	220/230	50	1.22	270	1350	5150	7	58	①
LWAA4E450S-5MEB-15	220/230	60	1.6	330	1400	5665	7	60	②
LWAA4D450S-5MEB-16	380/400	50	0.81	270	1350	5150	/	58	①
LWAA4D450S-5MEB-17	380/400	60	0.9	330	1400	5665	/	60	②

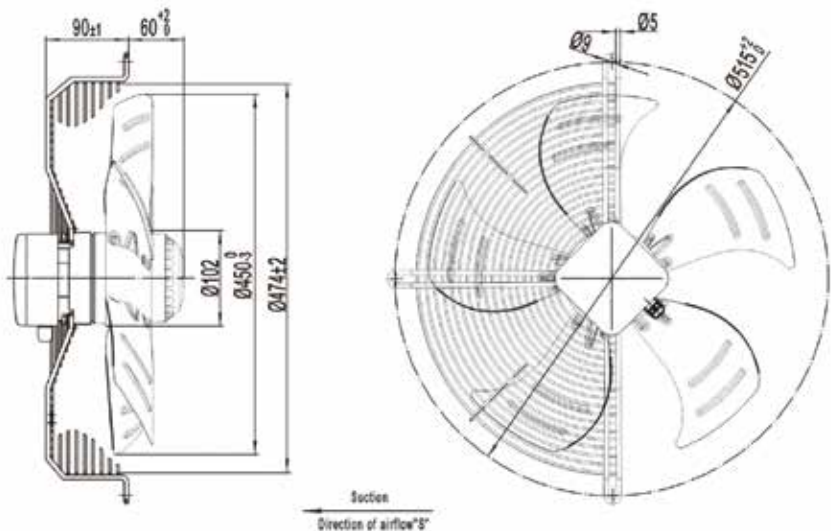

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAA-450 Serise

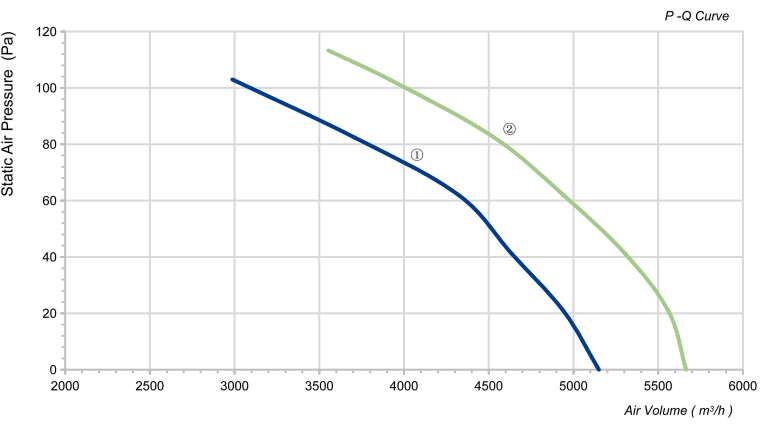



Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: F
- Operation Temperature: -30 C ~+60 C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E450S-5MKB-18	220/230	50	1.22	270	1350	5150	7	58	①
LWAA4E450S-5MKB-19	220/230	60	1.6	330	1400	5665	7	60	②
LWAA4D450S-5MKB-20	380/400	50	0.81	270	1350	5150	/	58	①
LWAA4D450S-5MKB-21	380/400	60	0.9	330	1400	5665	/	60	②

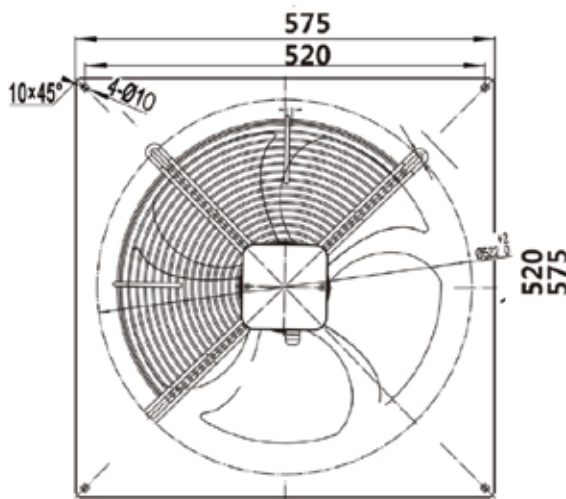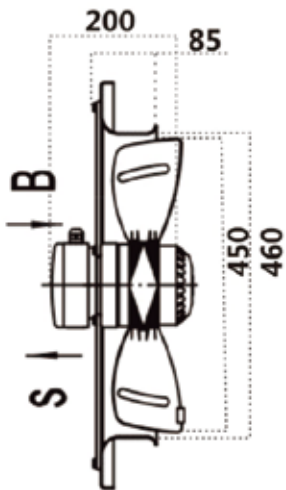

zakaz@ventilatorry.ru +7 (495) 133-95-09