


LWAA-500 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP55
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

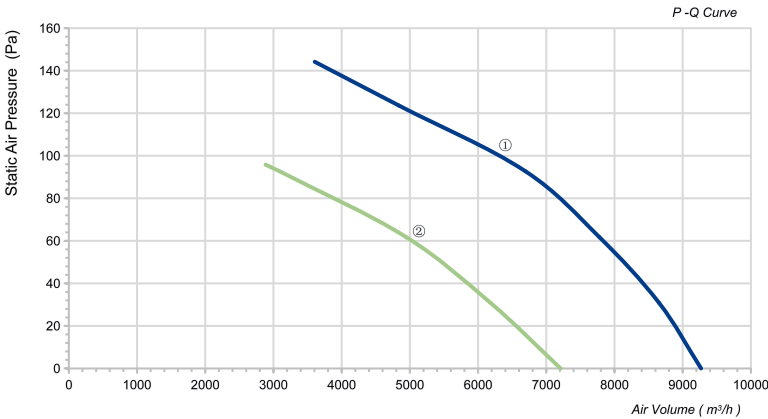


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E500S-5MEB-09	220/230	50	3.8	800	1320	9270	16	80	①
LWAA4D500S-5MEB-10	380/400	50	1.5	750	1350	9270	/	80	①
	380/400	50	0.9	500	1000	7210	/	70	②

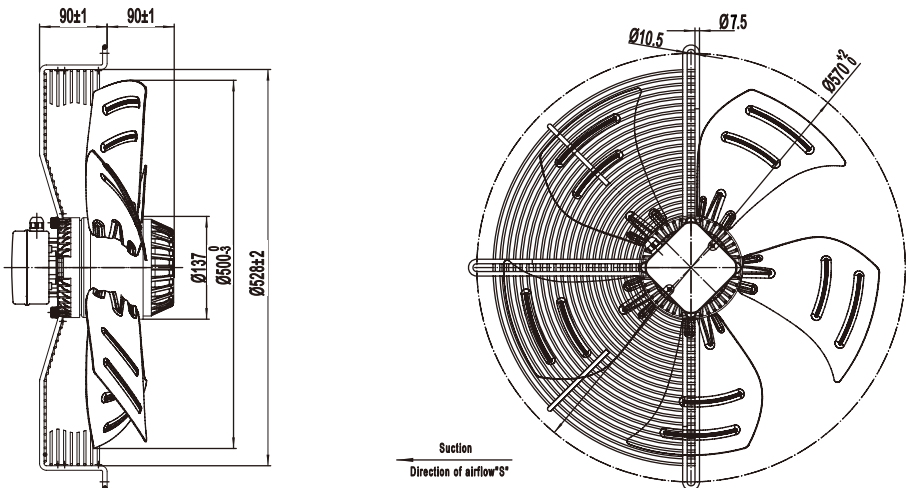

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAA-500 Serise

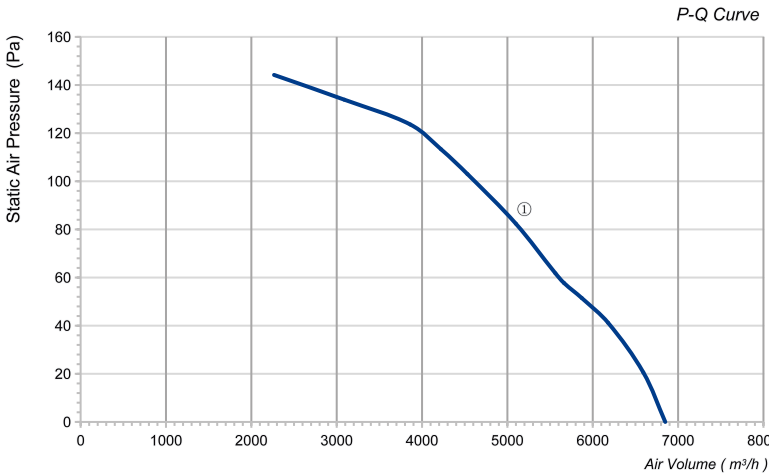


Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4E500B-5MKB-12	220/230	50	1.9	420	1320	6850	10	69	①

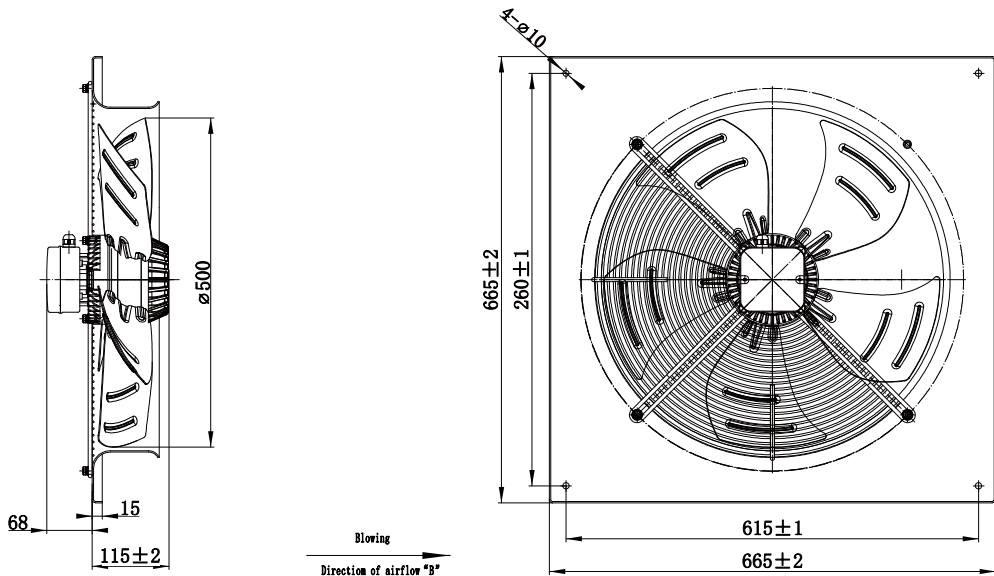

zakaz@ventilatorry.ru +7 (495) 133-95-09