


LWAA-710 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

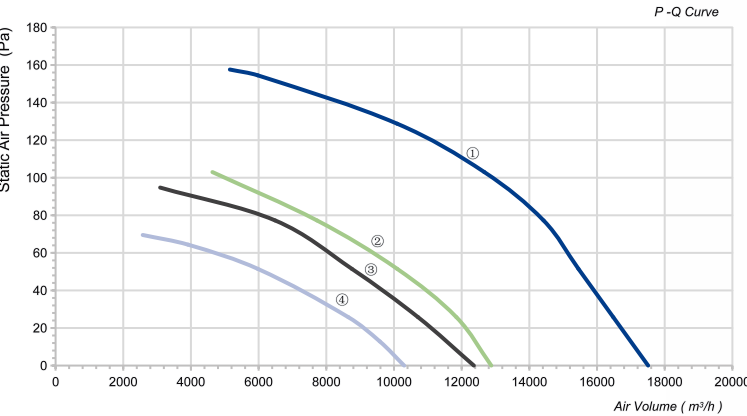


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA6D710S-7MKB-03	380/400	50	2	1100	900	17510	/	75	①
	380/400	50	1.4	750	600	12875	/	68	②
LWAA8D710S-7MKB-04	380/400	50	1.5	700	700	12360	/	67	③
	380/400	50	0.9	450	600	10300	/	65	④

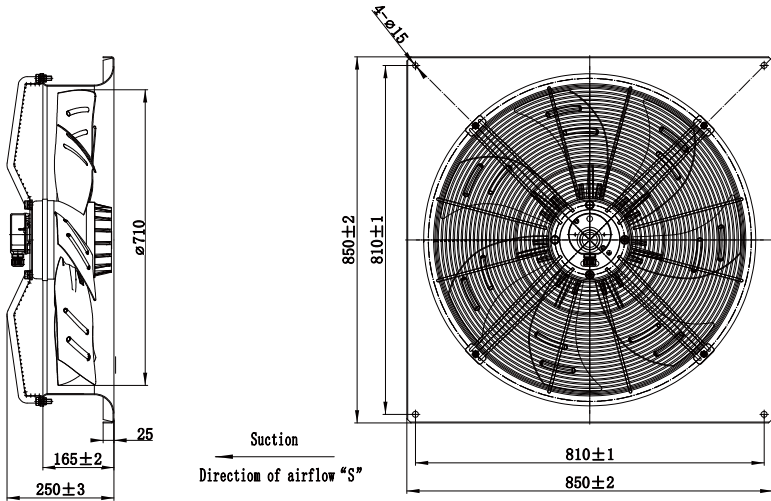

LWAA-710 Serise

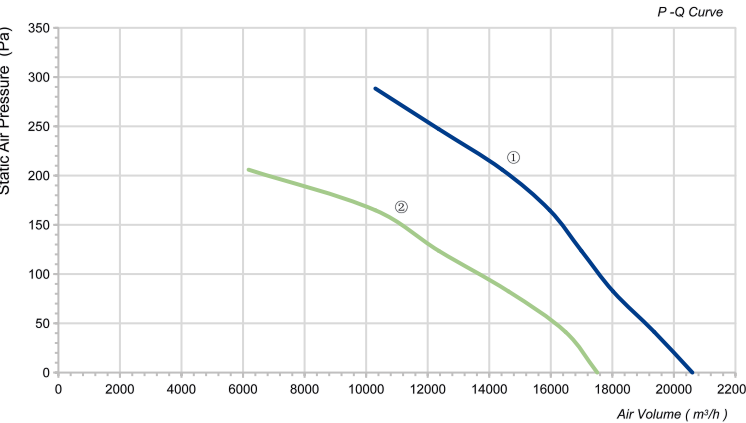

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA4D710S-7MKB-05	380/400	50	4.6	2550	1380	20600	/	85	①
	380/400	50	2	1250	1150	17510	/	80	②

