


LWAA-800 Serise

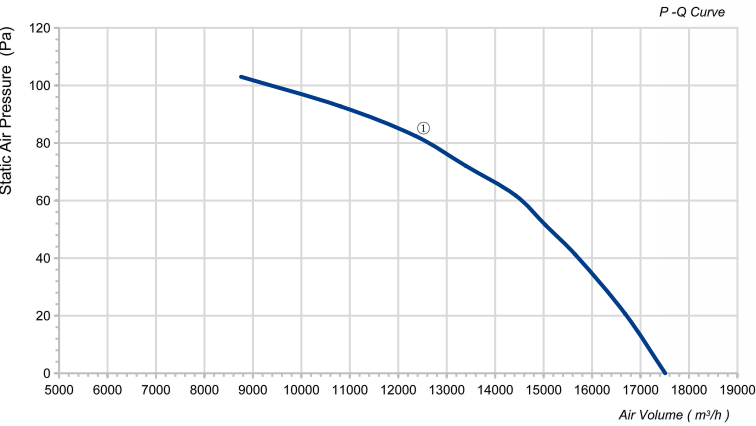

RECOMMEND



Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C




Technical Specifications

| Model              | Voltage (V) | Frequency (Hz) | Current (A) | Power (W) | Speed (RPM) | Air Volume (m³/h) | Capacitor (uF) | Noise [dB(A)] | Curve |
|--------------------|-------------|----------------|-------------|-----------|-------------|-------------------|----------------|---------------|-------|
| LWAA6D800S-5MKB-03 | 380         | 50             | 2.2         | 785       | 710         | 17510             | /              | 65            | ①     |

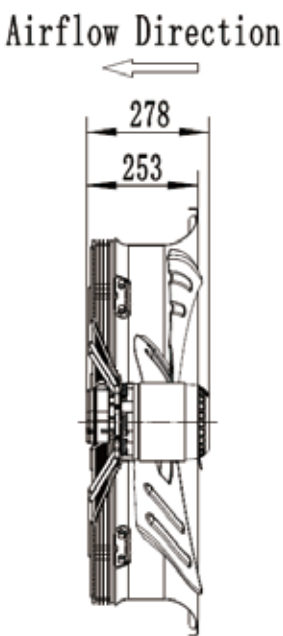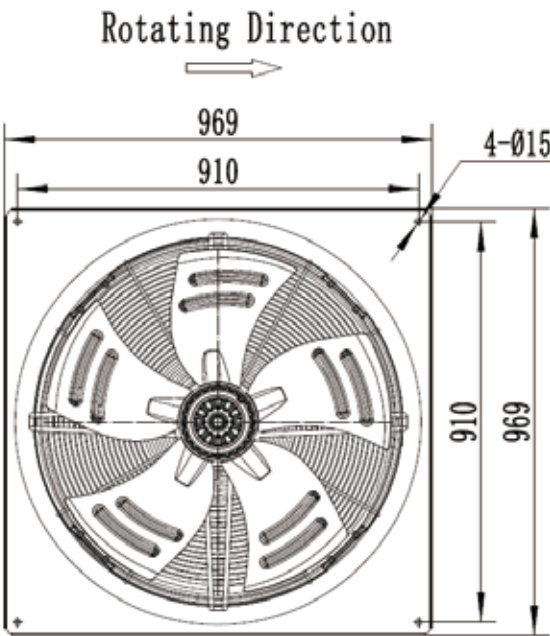

LWAA-900 Serise

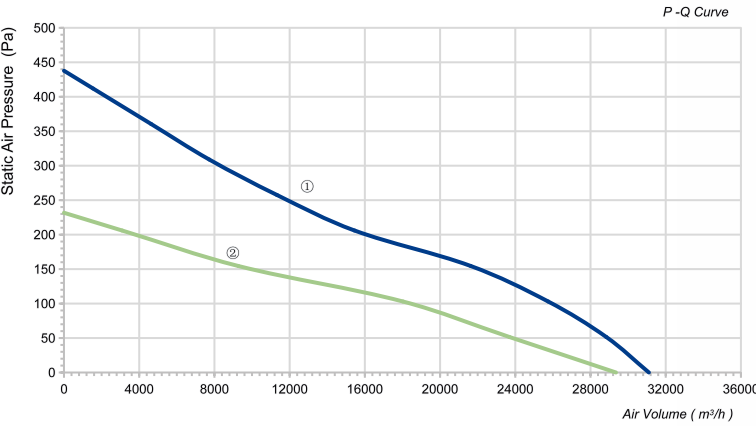

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

| Model              | Voltage (V) | Frequency (Hz) | Current (A) | Power (W) | Speed (RPM) | Air Volume (m³/h) | Capacitor (uF) | Noise [dB(A)] | Curve |
|--------------------|-------------|----------------|-------------|-----------|-------------|-------------------|----------------|---------------|-------|
| LWAA6D900S-5MKB-01 | 380/400     | 50             | 6.4         | 2600      | 940         | 31106             | /              | 80            | ①     |
|                    | 380/400     | 50             | 3.4         | 2050      | 830         | 29355             | /              | 77            | ②     |

