


LWAA-600 Serise




Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 5
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C

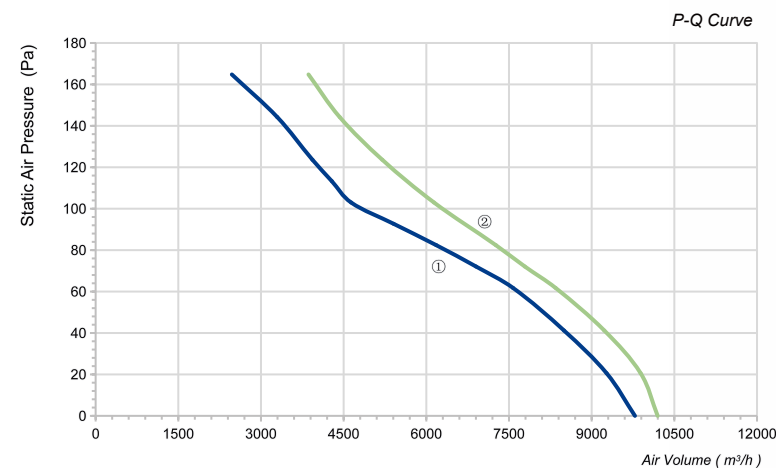


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA6E600B-5MKB-07	220/230	50	2.4	500	910	9785	12	67	①
LWAA6E600B-5MKB-08	220/230	60	2.9	640	1080	10197	12	69	②

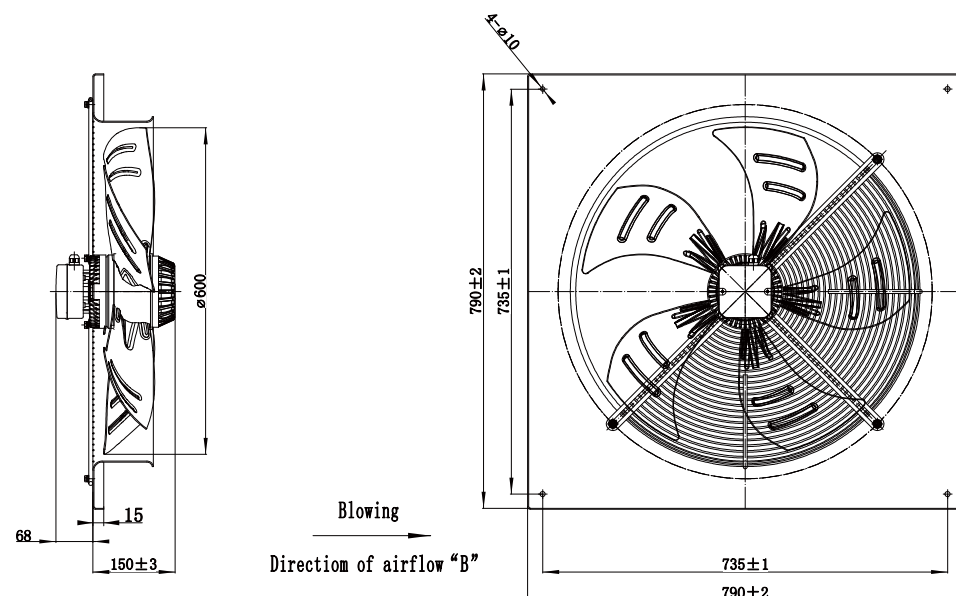

LWAA-630 Serise

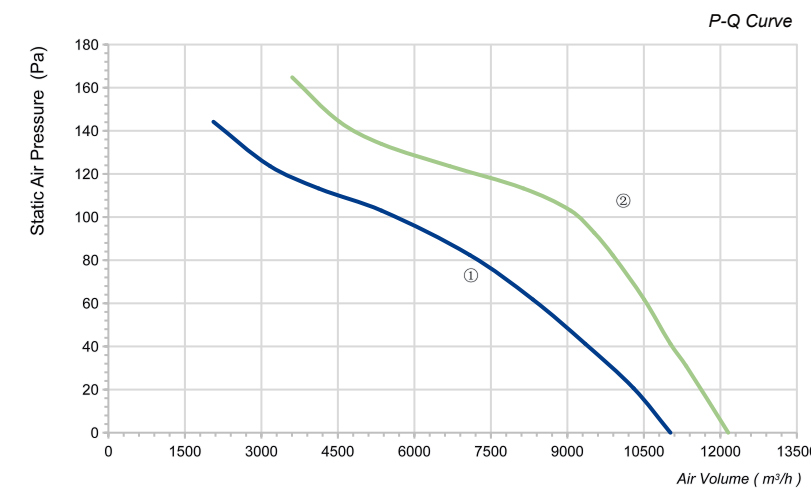

Product Characteristic

- Blades : Cold rolled steel
- Number of Blades: 7
- Mode of Operation: S1
- Type of Protection: IP54
- Insulation Class: F
- Operation Temperature: -30 °C ~ +60 °C



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Volume (m³/h)	Capacitor (uF)	Noise [dB(A)]	Curve
LWAA6D630B-5MKB-12	380/400	50	1.4	520	900	11021	/	67	①
LWAA6D630B-5MKB-13	380/400	60	1.5	740	1050	12154	/	69	②

