

LWAA9225 Series



Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Protected: Impedance protected
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 50PCS/CTN



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA9225UH-01	Ball	115	50/60	0.18/0.15	15.5/12.3	2600/3100	25/34	0.71/0.96	3.5/4.8	34/37
LWAA9225UH-02	Ball	115	50/60	0.18/0.15	15.5/12.3	2600/3100	25/34	0.71/0.96	3.5/4.8	34/37
LWAA9225UM-03	Ball	115	50/60	0.06/0.05	5.3/4.3	2400/2600	24/29	0.68/0.82	2.7/3.1	32/34
LWAA9225UM-04	Ball	115	50/60	0.06/0.05	5.3/4.3	2400/2600	24/29	0.68/0.82	2.7/3.1	32/34
LWAA9225UL-05	Ball	115	50/60	0.04/0.04	4.1/3.7	2200/2200	21/21	0.59/0.59	2.1/1.7	28/28
LWAA9225UL-06	Ball	115	50/60	0.04/0.04	4.1/3.7	2200/2200	21/21	0.59/0.59	2.1/1.7	28/28
LWAA9225UH-07	Sleeve	115	50/60	0.18/0.15	15.6/12.7	2500/3000	24/32	0.68/0.90	3.3/4.5	33/36
LWAA9225UH-08	Sleeve	115	50/60	0.18/0.15	15.6/12.7	2500/3000	24/32	0.68/0.90	3.3/4.5	33/36
LWAA9225UM-09	Sleeve	115	50/60	0.09/0.08	7.9/6.4	2400/2700	23/28	0.65/0.80	3.1/3.2	32/34
LWAA9225UM-10	Sleeve	115	50/60	0.09/0.08	7.9/6.4	2400/2700	23/28	0.65/0.80	3.1/3.2	32/34
LWAA9225UL-11	Sleeve	115	50/60	0.06/0.05	5.3/4.3	2300/2300	22/22	0.62/0.62	2.5/2.0	29/29
LWAA9225UL-12	Sleeve	115	50/60	0.06/0.05	5.3/4.3	2300/2300	22/22	0.62/0.62	2.5/2.0	29/29

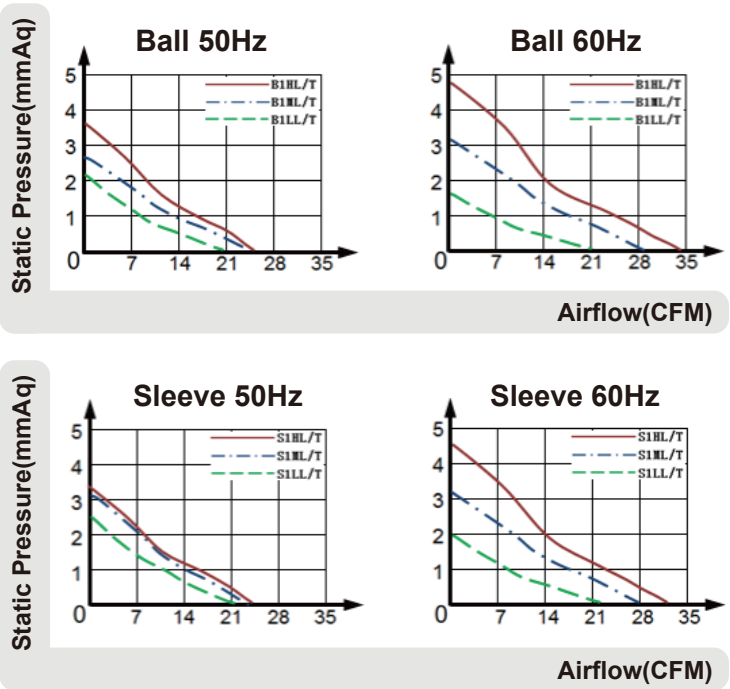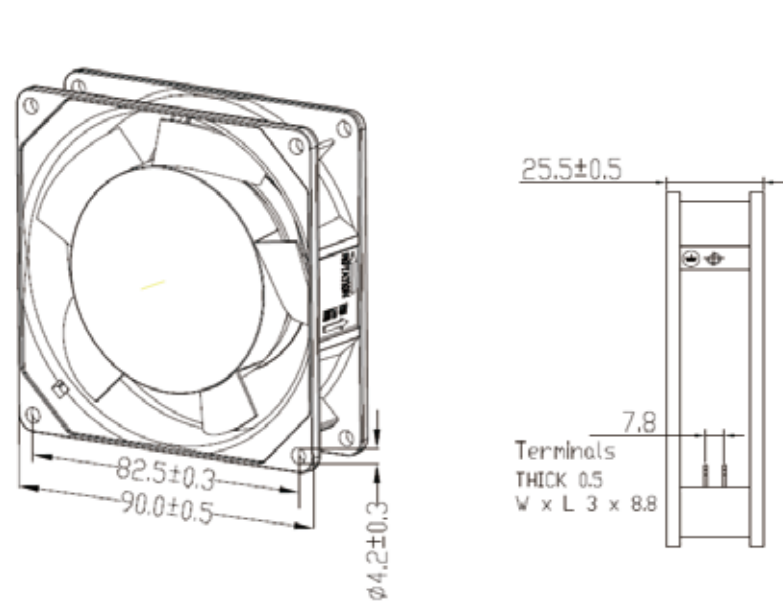

LWAA9225 Series

Product Characteristic

- Frame: Aluminum alloy
- Impeller: PBT Plastic
- Protected: Impedance protected
- Connection: Lead Wire or Terminals
- Ball Bearing: -20°C to +70°C
- Sleeve Bearing: -10°C to +70°C
- Package: 50PCS/CTN



Technical Specifications

Model	Bearing Type	Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Static Pressure (mm-H₂O)	Noise [dB(A)]
LWAA9225SH-01	Ball	220-240	50/60	0.07/0.06	12/10	2600/3050	25/34	0.71/0.96	3.6/4.5	34/37
LWAA9225SH-02	Ball	220-240	50/60	0.07/0.06	12/10	2600/3050	25/34	0.71/0.96	3.6/4.5	34/37
LWAA9225SM-03	Ball	220-240	50/60	0.05/0.04	8/6.4	2300/2500	24/24	0.68/0.68	2.5/2.7	31/33
LWAA9225SM-04	Ball	220-240	50/60	0.05/0.04	8/6.4	2300/2500	24/24	0.68/0.68	2.5/3.7	31/33
LWAA9225SL-05	Ball	220-240	50/60	0.03/0.02	5/4	2100/2000	20/20	0.57/0.57	2.0/1.6	28/27
LWAA9225SL-06	Ball	220-240	50/60	0.03/0.02	5/4	2100/2000	20/20	0.57/0.57	2.0/1.6	28/27
LWAA9225SH-07	Sleeve	220-240	50/60	0.07/0.06	12/10	2500/2850	25/29	0.71/0.82	3.2/3.9	33/36
LWAA9225SH-08	Sleeve	220-240	50/60	0.07/0.06	12/10	2500/2850	25/29	0.71/0.82	3.2/3.9	33/36
LWAA9225SM-09	Sleeve	220-240	50/60	0.05/0.04	9/7.3	2300/2300	24/24	0.68/0.68	2.6/2.4	31/32
LWAA9225SM-10	Sleeve	220-240	50/60	0.05/0.04	9/7.3	2300/2300	24/24	0.68/0.68	2.6/2.4	31/32
LWAA9225SL-11	Sleeve	220-240	50/60	0.04/0.03	8/6.4	2100/2100	20/20	0.57/0.57	1.9/1.5	28/28
LWAA9225SL-12	Sleeve	220-240	50/60	0.04/0.03	8/6.4	2100/2100	20/20	0.57/0.57	1.9/1.5	28/28

