

LWAD12025 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD12025LX-07	12	2	5000	177.3	5.02	31.3	1.23	249	60.5	213g	①
LWAD12025LH-08	12	1.5	4500	159.6	4.52	25.4	1	249	58.2	213g	②
LWAD12025LM-09	12	1	4000	141.8	4.02	20	0.79	196	55.7	213g	③
LWAD12025LL-10	12	0.6	3500	124.1	3.51	15.3	0.6	150	52.8	213g	④
LWAD12025MX-07	24	1	5000	177.3	5.02	31.3	1.23	249	60.5	213g	①
LWAD12025MH-08	24	0.8	4500	159.6	4.52	25.4	1	249	58.2	213g	②
LWAD12025MM-09	24	0.6	4000	141.8	4.02	20	0.79	196	55.7	213g	③
LWAD12025ML-10	24	0.5	3500	124.1	3.51	15.3	0.6	150	52.8	213g	④
LWAD12025HX-07	48	0.8	5000	177.3	5.02	31.3	1.23	249	60.5	213g	①
LWAD12025HH-08	48	0.5	4500	159.6	4.52	25.4	1	249	58.2	213g	②
LWAD12025HM-09	48	0.4	4000	141.8	4.02	20	0.79	196	55.7	213g	③
LWAD12025HL-10	48	0.3	3500	124.1	3.51	15.3	0.6	150	52.8	213g	④

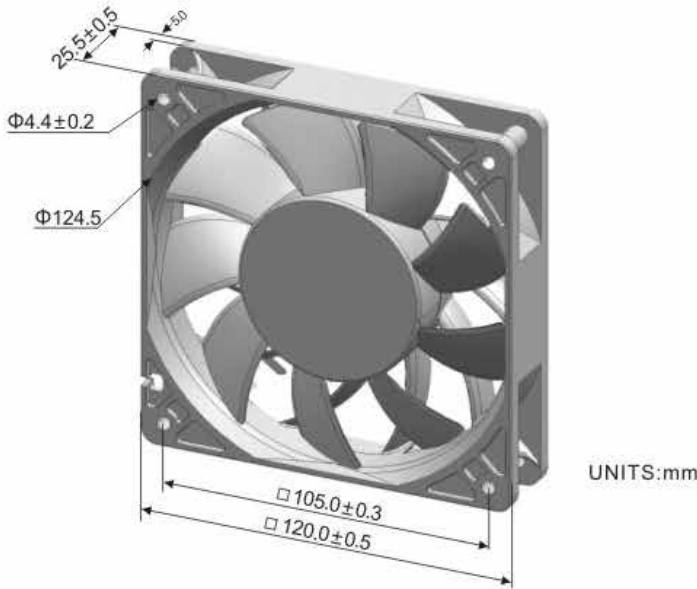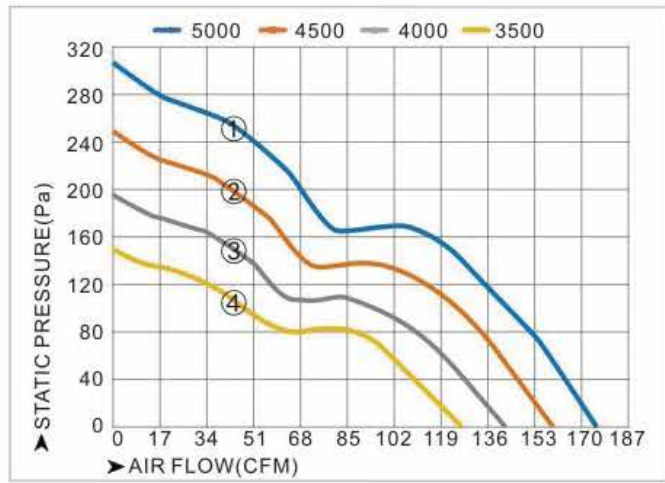

LWAD12038 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD12038LX-01	12	3.5	4600	212.6	6.02	21.4	0.84	210	58.5	335g	①
LWAD12038LH-02	12	1.5	4200	195.1	5.53	18.5	0.73	181	55.7	335g	②
LWAD12038LM-03	12	1	3600	167.3	4.74	13.6	0.54	133	52.4	335g	③
LWAD12038MX-01	24	2	4600	212.6	6.02	21.4	0.84	210	58.5	335g	①
LWAD12038MH-02	24	1	4200	195.1	5.53	18.5	0.73	181	55.7	335g	②
LWAD12038MM-03	24	0.6	3600	167.3	4.74	13.6	0.54	133	52.4	335g	③
LWAD12038HX-01	48	1.2	4600	212.6	6.02	21.4	0.84	210	58.5	335g	①
LWAD12038HH-02	48	0.5	4200	195.1	5.53	18.5	0.73	181	55.7	335g	②
LWAD12038HM-03	48	0.35	3600	167.3	4.74	13.6	0.54	133	52.4	335g	③

