

LWAD2510 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO)
- Impeller: Plastic(UL94-VO)
- Voltage:

5VDC(4.0~5.5VDC),12VDC(6~13.8VDC)
- Temperature:



Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD2510KX-01	5	0.35	16000	3.2	0.09	9.2	0.36	90	35	8g	①
LWAD2510KH-02	5	0.3	14000	2.8	0.08	7.1	0.28	69	32.1	8g	②
LWAD2510KM-03	5	0.25	12000	2.4	0.07	5.2	0.2	51	28.8	8g	③
LWAD2510KL-04	5	0.2	10000	2	0.06	5.6	0.14	35	24.8	8g	④
LWAD2510KD-05	5	0.15	8000	1.6	0.04	2.3	0.09	23	19.9	8g	⑤
LWAD2510LX-01	12	0.17	16000	3.2	0.09	9.2	0.36	90	35	8g	①
LWAD2510LH-02	12	0.15	14000	2.8	0.08	7.1	0.28	69	32.1	8g	②
LWAD2510LM-03	12	0.12	12000	2.4	0.07	5.2	0.20	51	28.8	8g	③
LWAD2510LL-04	12	0.1	10000	2	0.06	3.6	0.14	35	24.8	8g	④
LWAD2510LD-05	12	0.08	8000	1.6	0.04	2.3	0.09	23	19.9	8g	⑤

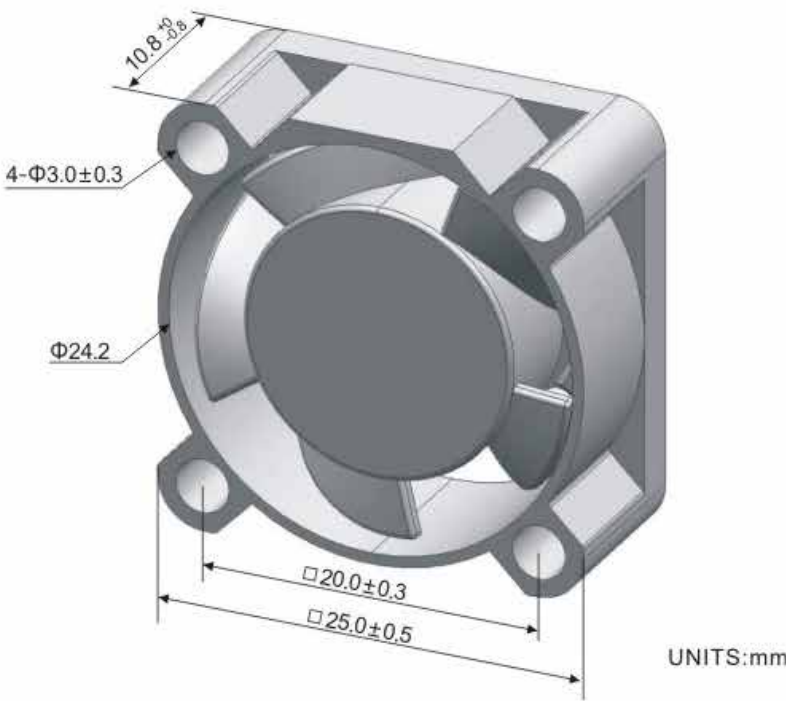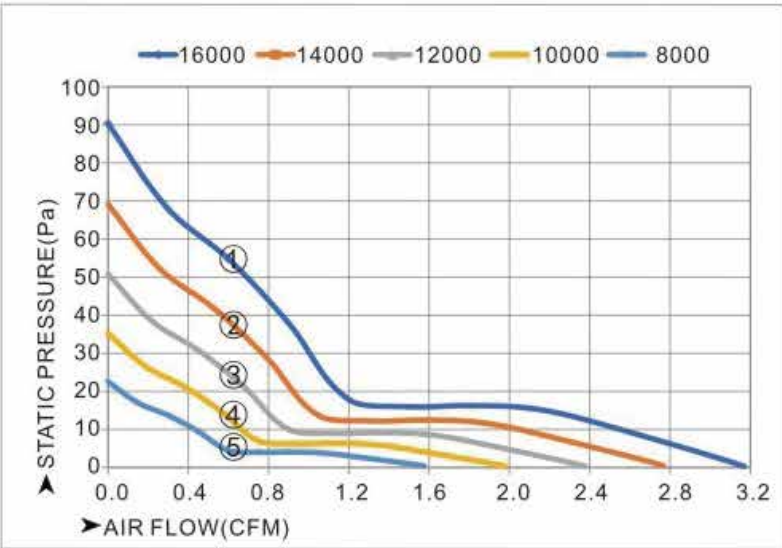

LWAD3010 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO)
- Impeller: Plastic(UL94-VO)
- Voltage:

5VDC(4.0~5.5VDC),12VDC(6~13.8VDC)
- Temperature:

Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD3010KX-01	5	0.35	15000	5.1	0.15	6.6	0.26	64	39	9g	①
LWAD3010KH-02	5	0.3	13000	4.5	0.13	4.9	0.19	48	35.9	9g	②
LWAD3010KM-03	5	0.25	10000	3.4	0.1	2.9	0.12	29	30.2	9g	③
LWAD3010KL-04	5	0.2	8000	2.7	0.08	1.9	0.07	18	25.3	9g	④
LWAD3010KD-05	5	0.15	6000	2.1	0.06	1.1	0.04	10	19.1	9g	⑤
LWAD3010LX-01	12	0.17	15000	5.1	0.15	6.6	0.26	64	39	9g	①
LWAD3010LH-02	12	0.15	13000	4.5	0.13	4.9	0.19	48	35.9	9g	②
LWAD3010LM-03	12	0.12	10000	3.4	0.1	2.9	0.12	29	30.2	9g	③
LWAD3010LL-04	12	0.1	8000	2.7	0.08	1.9	0.07	18	25.3	9g	④
LWAD3010LD-05	12	0.08	6000	2.1	0.06	1.1	0.04	10	19.1	9g	⑤

