


LWAD-200 Serise




Product Characteristic

- Impeller Material : Metal sheet
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25 C ~+60 C
- Motor Type: Brushless DC external rotor motor
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection

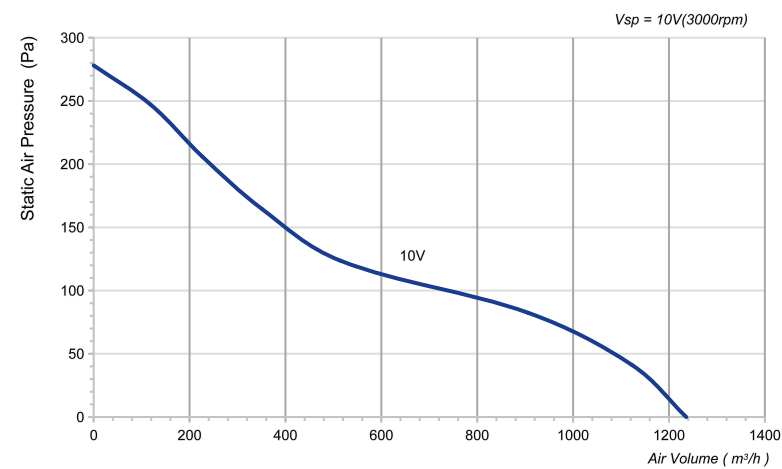


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Noise [dB(A)]
LWAD3G200MS-7MKB-01	24	50/60	2.5	60	3000	1236	278	62
LWAD3G200HS-7MKB-02	48	50/60	1.25	60	3000	1236	278	62

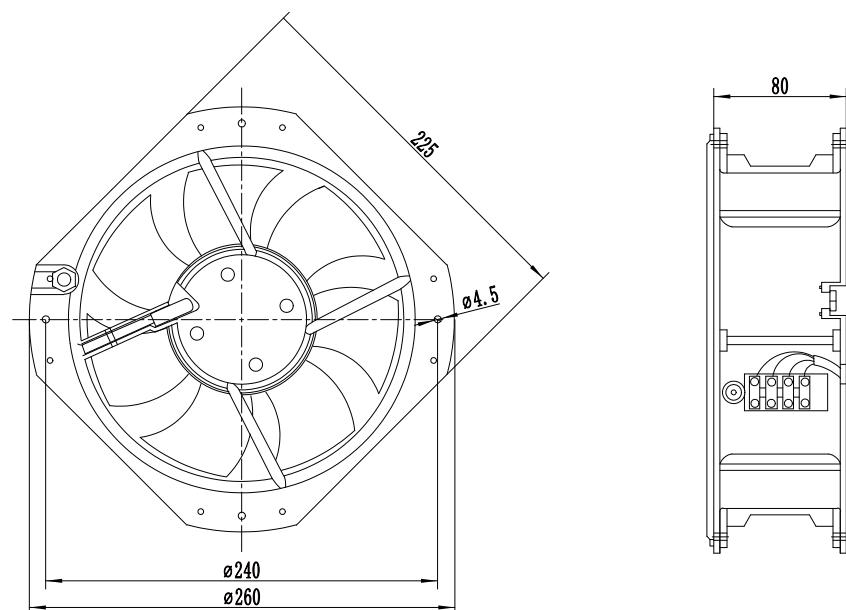

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAD-250 Serise

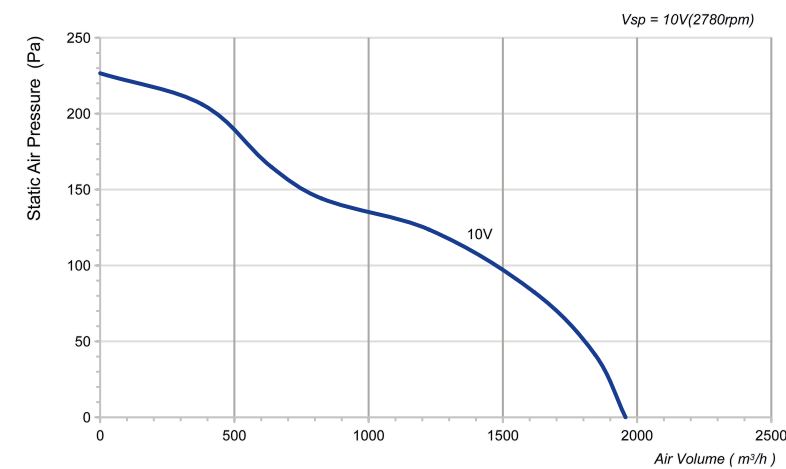


Product Characteristic

- Impeller Material : Metal sheet
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25 C ~+60 C
- Motor Type: Brushless DC external rotor motor
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Noise [dB(A)]
LWAD3G250MS-7MKB-01	24	50/60	4.4	105	2780	1957	227	69
LWAD3G250HS-7MKB-02	48	50/60	2.2	105	2780	1957	227	69

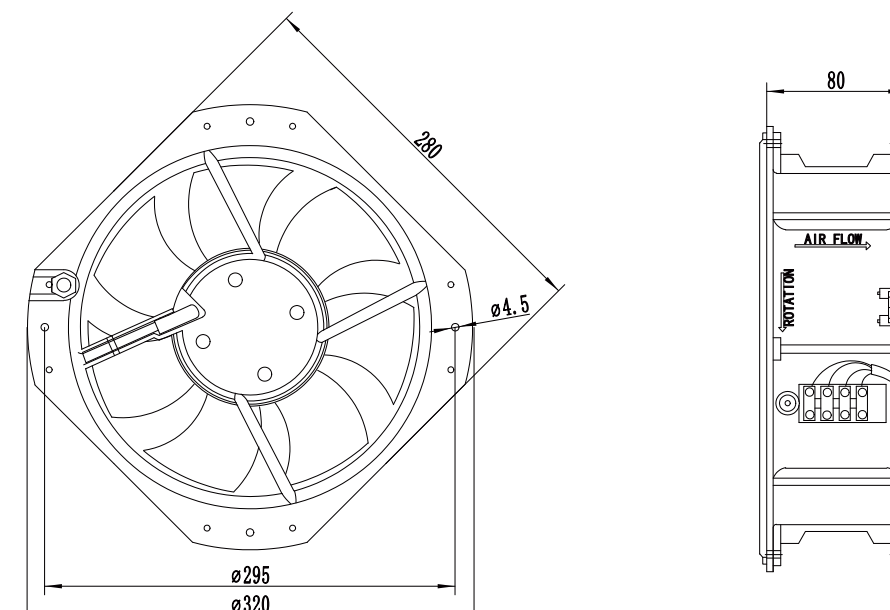

zakaz@ventilatorry.ru +7 (495) 133-95-09