

LWAD-200 Serise


Product Characteristic

- Impeller Material : Metal sheet
- Protection Class: IP44
- Insulation Class: B
- Operation Temperature: -25 C ~ +60 C
- Motor Type: Brushless DC external rotor motor
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity, Over-voltage Protection,Soft Start Protection




Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W@0Pa]	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Noise [dB(A)]
LWAD3G200ZS-7MNW-03	310	50/60	0.17	55	3000	979	319	60
LWAD3G200ZB-7MNW-04	310	50/60	0.17	55	3000	979	319	60
LWAD3G200ZS-7MEW-05	310	50/60	0.17	55	3000	979	319	60
LWAD3G200ZB-7MEW-06	310	50/60	0.17	55	3000	979	319	60
LWAD3G200ZS-7MGW-07	310	50/60	0.17	55	3000	979	319	60
LWAD3G200ZB-7MGW-08	310	50/60	0.17	55	3000	979	319	60

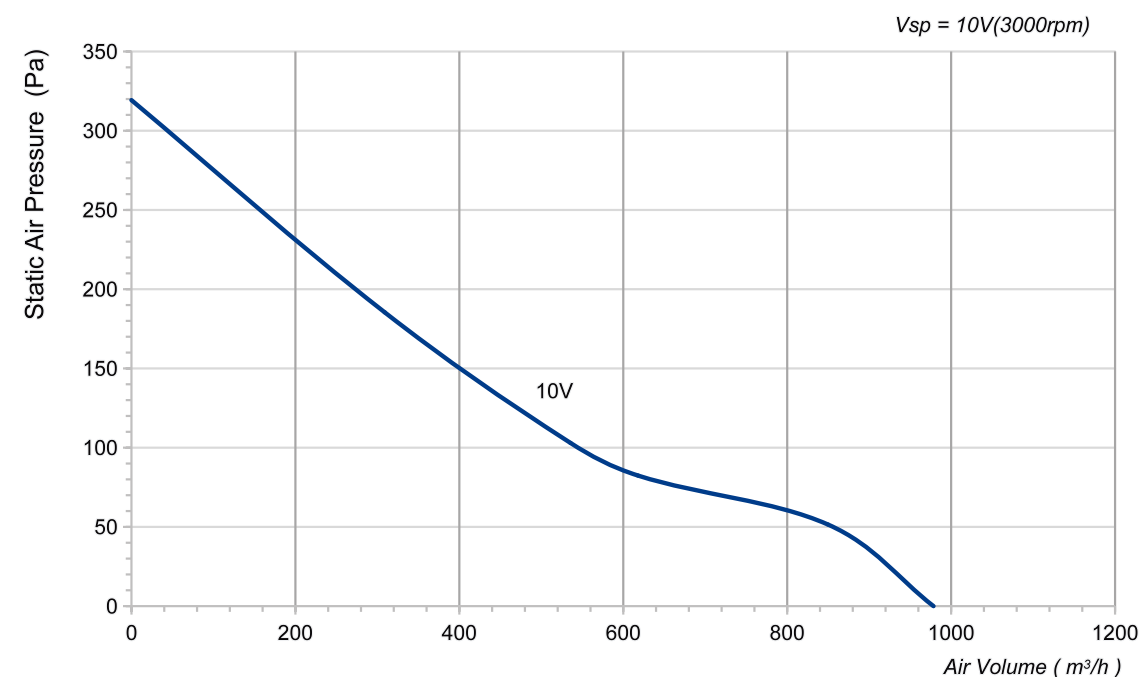


LWAD3G200ZS-7MNW-03(Suction)

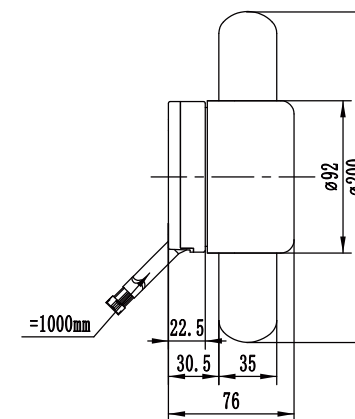


LWAD3G200ZB-7MNW-04(Blowing)

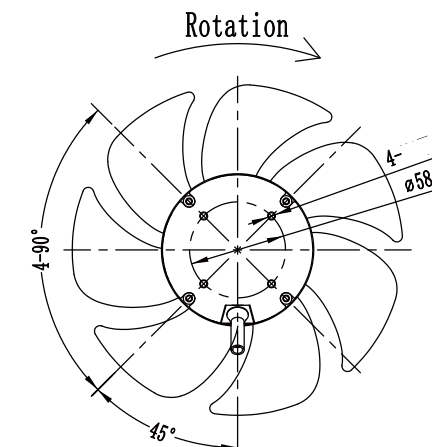


LWAD3G200ZS-7MEW-05(Suction)

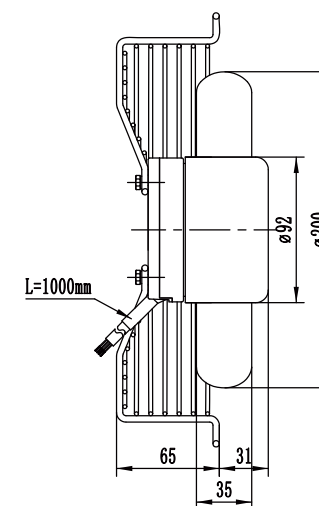

LWAD3G200ZB-7MEW-06(Blowing)

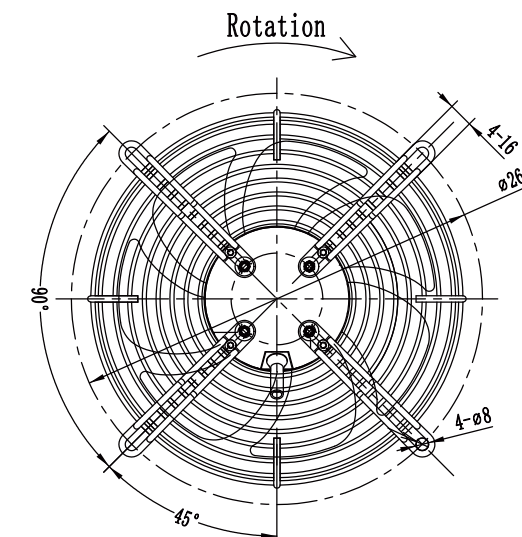

LWAD3G200ZS-7MGW-07(Suction)

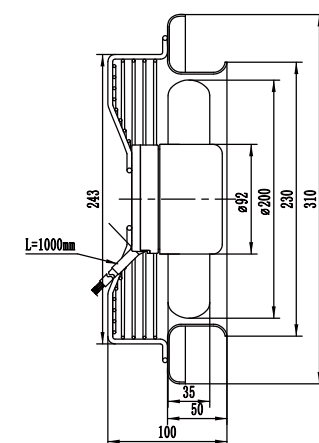

LWAD3G200ZB-7MGW-08(Blowing)

