

LWAD-300 Serise


Product Characteristic

- Motor Type : BLDC Motor
- Protection Class: IP42
- Insulation Class: F
- Operation Temperature: -25 C ~ +60 C
- Material: PA66
- Technical Feature: Control input 0-10VDC/PWM,Tach output,Locked-Rotor protection,Reverse Polarity, Over-voltage Protection,Soft Start Protection




Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Air Pressure (Pa)	Noise [dB(A)]
LWAD3G300ZS-5PNW-01	310	50/60	0.52	165	2100	2524	185	69
LWAD3G300ZB-5PNW-02	310	50/60	0.52	165	2100	2524	185	69
LWAD3G300ZS-5PEW-03	310	50/60	0.52	165	2100	2524	185	69
LWAD3G300ZB-5PEW-04	310	50/60	0.52	165	2100	2524	185	69
LWAD3G300ZS-5PKW-05	310	50/60	0.52	165	2100	2524	185	69
LWAD3G300ZB-5PKW-06	310	50/60	0.52	165	2100	2524	185	69

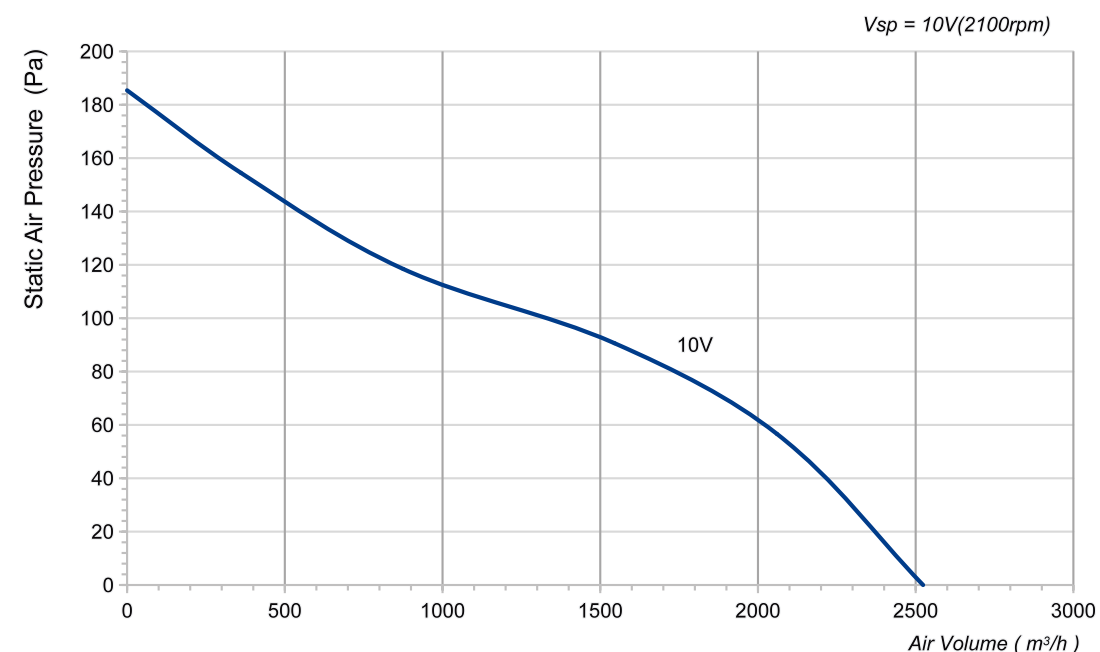


LWAD3G300ZS-5PNW-01(Suction)

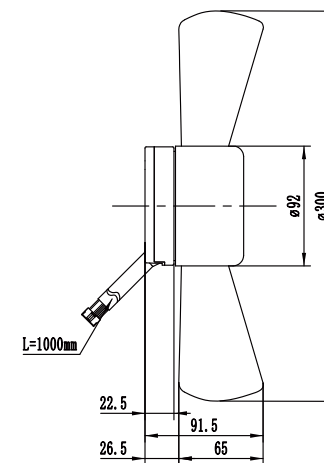


LWAD3G300ZB-5PNW-02(Blowing)

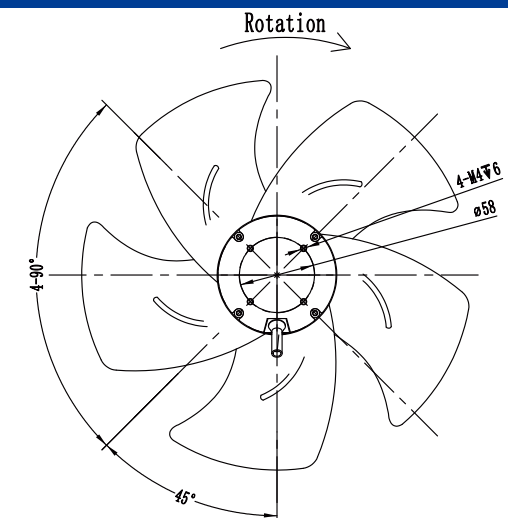


LWAD3G300ZS-5PEW-03(Suction)

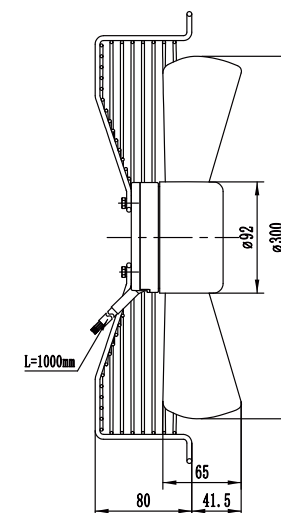

LWAD3G300ZB-5PEW-04(Blowing)

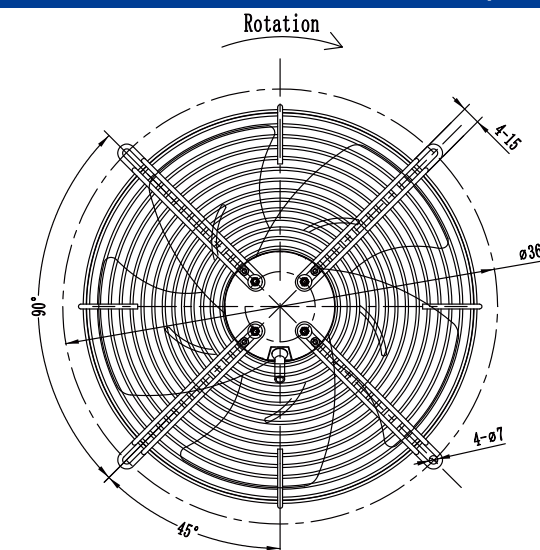

LWAD3G300ZS-5PKW-05(Suction)

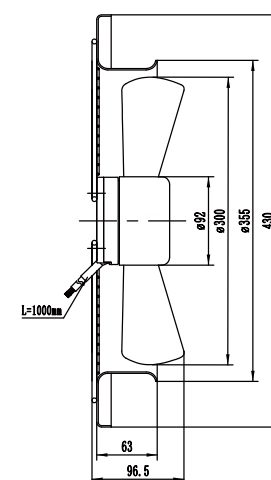

LWAD3G300ZB-5PKW-06(Blowing)

