

LWAD4010 Series


Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC),12VDC(6~13.8VDC),24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD4010KX-01	5	0.35	9500	8.9	0.25	7.5	0.3	74	42.7	14g	①
LWAD4010KH-02	5	0.3	8500	8	0.23	6	0.24	59	40.3	14g	②
LWAD4010KM-03	5	0.25	7500	7.1	0.2	4.7	0.19	46	37.6	14g	③
LWAD4010KL-04	5	0.2	6500	6.1	0.17	3.5	0.14	35	34.5	14g	④
LWAD4010KD-05	5	0.15	5500	5.2	0.15	2.5	0.1	25	30.8	14g	⑤
LWAD4010LX-01	12	0.17	9500	8.9	0.25	7.5	0.3	74	42.7	14g	①
LWAD4010LH-02	12	0.15	8500	8	0.23	6	0.24	59	40.3	14g	②
LWAD4010LM-03	12	0.12	7500	7.1	0.2	4.7	0.19	46	37.6	14g	③
LWAD4010LL-04	12	0.1	6500	6.1	0.17	3.5	0.14	35	34.5	14g	④
LWAD4010LD-05	12	0.08	5500	5.2	0.15	2.5	0.1	25	30.8	14g	⑤
LWAD4010MX-01	24	0.1	9500	8.9	0.25	7.5	0.3	74	42.7	14g	①
LWAD4010MH-02	24	0.09	8500	8	0.23	6	0.24	59	40.3	14g	②
LWAD4010MM-03	24	0.08	7500	7.1	0.2	4.7	0.19	46	37.6	14g	③
LWAD4010ML-04	24	0.07	6500	6.1	0.17	3.5	0.14	35	34.5	14g	④
LWAD4010MD-05	24	0.06	5500	5.2	0.15	2.5	0.1	25	30.8	14g	⑤

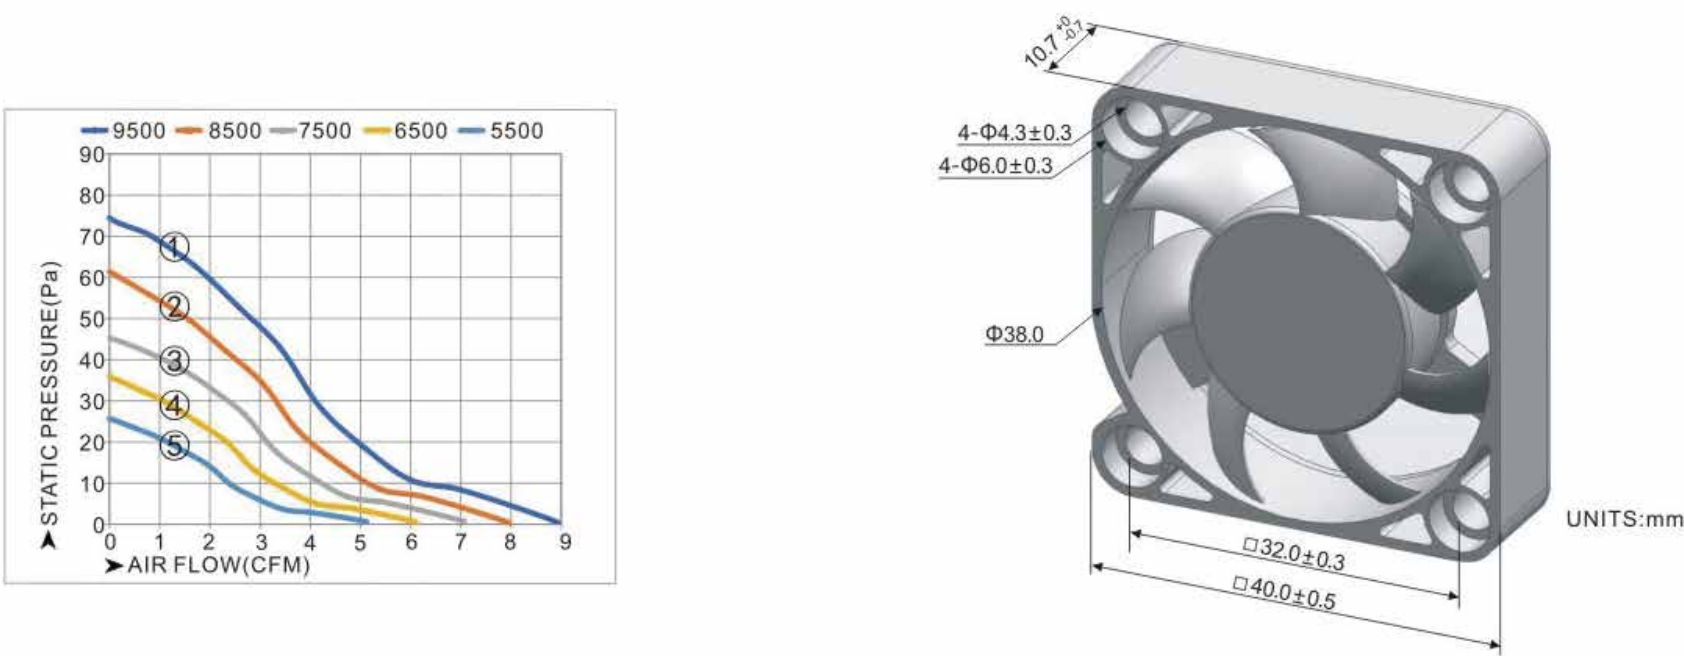

LWAD4015 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC),12VDC(6~13.8VDC),24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD4015KX-01	5	0.4	10000	9.2	0.26	11.5	0.45	112	41.3	24g	①
LWAD4015KH-02	5	0.5	9000	8.3	0.24	9.3	0.37	91	39.3	24g	②
LWAD4015KM-03	5	0.4	8000	7.4	0.21	7.3	0.29	72	36.5	24g	③
LWAD4015KL-04	5	0.35	7000	6.5	0.18	5.6	0.22	55	33.6	24g	④
LWAD4015KD-05	5	0.3	6000	5.5	0.16	4.1	0.16	40	30.2	24g	⑤
LWAD4015LX-01	12	0.25	10000	9.2	0.26	11.5	0.45	112	41.3	24g	①
LWAD4015LH-02	12	0.22	9000	8.3	0.24	9.3	0.37	91	39.3	24g	②
LWAD4015LM-03	12	0.2	8000	7.4	0.21	7.3	0.29	72	36.5	24g	③
LWAD4015LL-04	12	0.18	7000	6.5	0.18	5.6	0.22	55	33.6	24g	④
LWAD4015LD-05	12	0.16	6000	5.5	0.16	4.1	0.16	40	30.2	24g	⑤
LWAD4015MX-01	24	0.16	10000	9.2	0.26	11.5	0.45	112	41.3	24g	①
LWAD4015MH-02	24	0.14	9000	8.3	0.24	9.3	0.37	91	39.3	24g	②
LWAD4015MM-03	24	0.12	8000	7.4	0.21	7.3	0.29	72	36.5	24g	③
LWAD4015ML-04	24	0.1	7000	6.5	0.18	5.6	0.22	55	33.6	24g	④
LWAD4015MD-05	24	0.08	6000	5.5	0.16	4.1	0.16	40	30.2	24g	⑤

