

LWAD4028 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD4028LX-01	12	0.65	15000	20.6	0.58	24	0.94	235	54.2	40g	①
LWAD4028LH-02	12	0.42	13000	17.8	0.51	18	0.71	176	51.1	40g	②
LWAD4028LM-03	12	0.35	10000	13.7	0.39	10.6	0.42	104	45.4	40g	③
LWAD4028LL-04	12	0.2	8000	11	0.31	6.8	0.27	67	40.5	40g	④
LWAD4028LD-05	12	0.12	6000	8.2	0.23	3.8	0.15	38	34.3	40g	⑤
LWAD4028MX-01	24	0.32	15000	20.6	0.58	24	0.94	235	54.2	40g	①
LWAD4028MH-02	24	0.2	13000	17.8	0.51	18	0.71	176	51.1	40g	②
LWAD4028MM-03	24	0.18	10000	13.7	0.39	10.6	0.42	104	45.4	40g	③
LWAD4028ML-04	24	0.12	8000	11	0.31	6.8	0.27	67	40.5	40g	④
LWAD4028MD-05	24	0.08	6000	8.2	0.23	3.8	0.15	38	34.3	40g	⑤

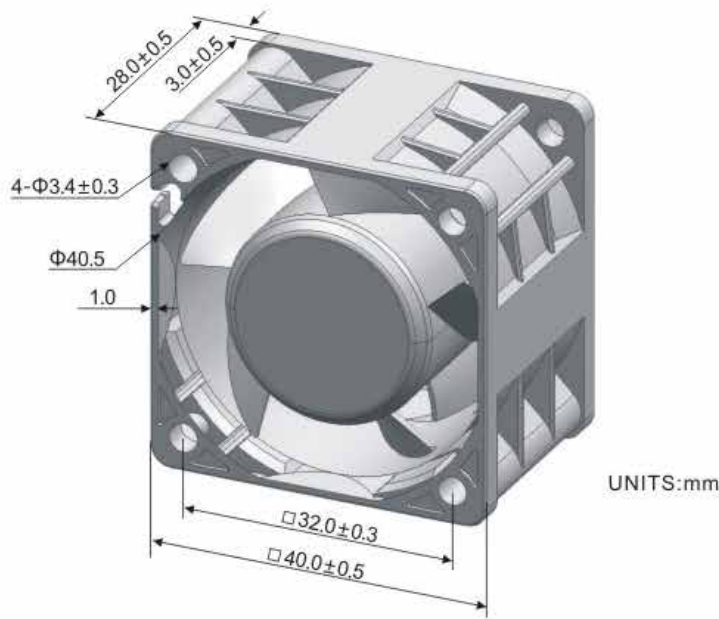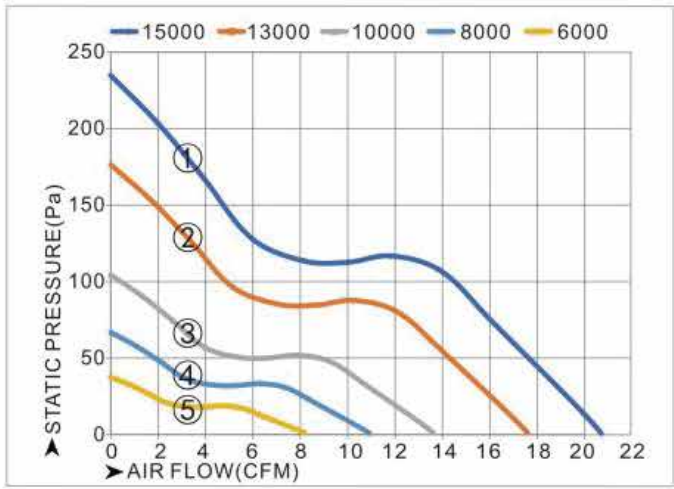

LWAD5010 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC),12VDC(6~13.8VDC),24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD5010KX-01	5	0.35	7000	11.9	0.34	4.8	0.19	47	37.2	20g	①
LWAD5010KH-02	5	0.3	6000	10.2	0.29	3.5	0.14	35	33.9	20g	②
LWAD5010KM-03	5	0.25	5000	8.5	0.24	2.5	0.1	24	29.9	20g	③
LWAD5010KL-04	5	0.2	4000	6.8	0.19	1.6	0.06	15	25.2	20g	④
LWAD5010KD-05	5	0.16	3000	5.1	0.14	0.9	0.03	9	18.8	20g	⑤
LWAD5010LX-01	12	0.16	7000	11.9	0.34	4.8	0.19	47	37.2	20g	①
LWAD5010LH-02	12	0.14	6000	10.2	0.29	3.5	0.14	35	33.9	20g	②
LWAD5010LM-03	12	0.12	5000	8.5	0.24	2.5	0.1	24	29.9	20g	③
LWAD5010LL-04	12	0.1	4000	6.8	0.19	1.6	0.06	15	25.2	20g	④
LWAD5010LD-05	12	0.08	3000	5.1	0.14	0.9	0.03	g	18.8	20g	⑤
LWAD5010MX-01	24	0.12	7000	11.9	0.34	4.8	0.19	47	37.2	20g	①
LWAD5010MH-02	24	0.1	6000	10.2	0.29	3.5	0.14	35	33.9	20g	②
LWAD5010MM-03	24	0.08	5000	8.5	0.24	2.5	0.1	24	29.9	20g	③
LWAD5010ML-04	24	0.06	4000	6.8	0.19	1.6	0.06	15	25.2	20g	④
LWAD5010MD-05	24	0.04	3000	5.1	0.14	0.9	0.03	9	18.8	20g	⑤

