

LWAD5015 Series


Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD5015KX-01	5	0.4	7000	16.3	0.46	6.7	0.26	66	40.7	30g	①
LWAD5015KH-02	5	0.35	6000	14	0.4	4.9	0.19	48	37.4	30g	②
LWAD5015KM-03	5	0.3	5000	11.6	0.33	3.4	0.13	34	33.4	30g	③
LWAD5015KL-04	5	0.25	4000	9.3	0.26	2.2	0.09	21	28.5	30g	④
LWAD5015KD-05	5	0.2	3000	7	0.2	1.2	0.05	12	22.3	30g	⑤
LWAD5015LX-01	12	0.18	7000	16.3	0.46	6.7	0.26	66	40.7	30g	①
LWAD5015LH-02	12	0.16	6000	14	0.4	4.9	0.19	48	37.4	30g	②
LWAD5015LM-03	12	0.14	5000	11.6	0.33	3.4	0.13	34	33.4	30g	③
LWAD5015LL-04	12	0.12	4000	9.3	0.26	2.2	0.09	21	28.5	30g	④
LWAD5015LD-05	12	0.1	3000	7	0.2	1.2	0.05	12	22.3	30g	⑤
LWAD5015MX-01	24	0.14	7000	16.3	0.46	6.7	0.26	66	40.7	30g	①
LWAD5015MH-02	24	0.12	6000	14	0.4	4.9	0.19	48	37.4	30g	②
LWAD5015MM-03	24	0.1	5000	11.6	0.33	3.4	0.13	34	33.4	30g	③
LWAD5015ML-04	24	0.08	4000	9.3	0.26	2.2	0.09	21	28.5	30g	④
LWAD5015MD-05	24	0.06	3000	7	0.2	1.2	0.05	12	22.3	30g	⑤

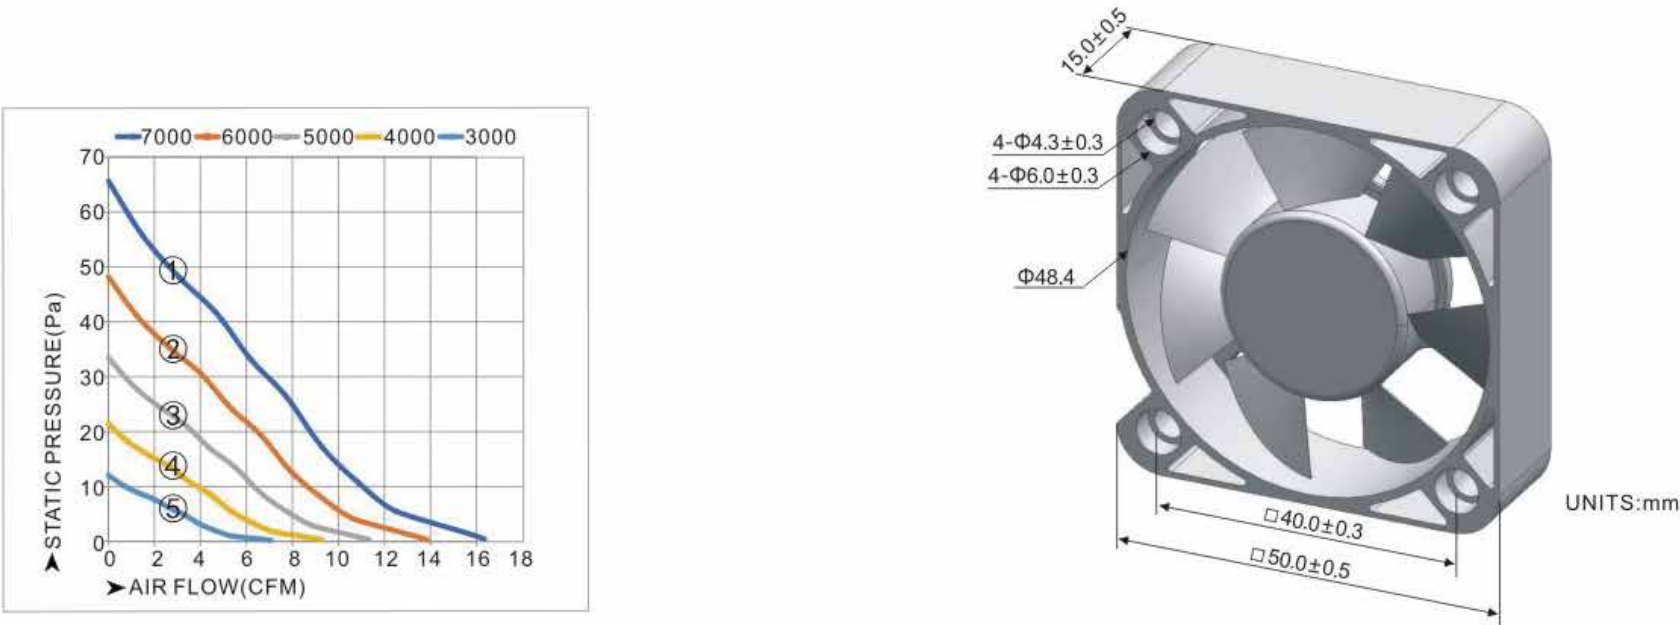

LWAD5020 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch--H2O	Pa	dBA	g	
LWAD5020KX-01	5	0.6	6500	20.5	0.58	7.6	0.3	75	38.6	33g	①
LWAD5020KH-02	5	0.5	6000	18.9	0.54	6.5	0.26	64	36.9	33g	②
LWAD5020KM-03	5	0.4	5500	17.3	0.49	5.5	0.22	54	35	33g	③
LWAD5020KL-04	5	0.35	5000	15.8	0.45	4.5	0.18	44	32.9	33g	④
LWAD5020KD-05	5	0.26	4500	14.2	0.4	3.7	0.14	36	30.6	33g	⑤
LWAD5020LX-01	12	0.28	6500	20.5	0.58	7.6	0.3	75	38.6	33g	①
LWAD5020LH-02	12	0.24	6000	18.9	0.54	6.5	0.26	64	36.9	33g	②
LWAD5020LH-02	12	0.24	6000	18.9	0.54	6.5	0.26	64	36.9	33g	②
LWAD5020LM-03	12	0.2	5500	17.3	0.49	5.5	0.22	54	35	33g	③
LWAD5020LL-04	12	0.16	5000	15.8	0.45	4.5	0.18	44	32.9	33g	④
LWAD5020LD-05	12	0.12	4500	14.2	0.4	3.7	0.14	36	30.6	33g	⑤
LWAD5020MX-01	24	0.18	6500	20.5	0.58	7.6	0.3	75	38.6	33g	①
LWAD5020MH-02	24	0.16	6000	18.9	0.54	6.5	0.26	64	36.9	33g	②
LWAD5020MM-03	24	0.14	5500	17.3	0.49	5.5	0.22	54	35	33g	③
LWAD5020ML-04	24	0.12	5000	15.8	0.45	4.5	0.18	44	32.9	33g	④
LWAD5020MD-05	24	0.1	4500	14.2	0.4	3.7	0.14	36	30.6	33g	⑤

