

LWAD5025 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD5025KX-01	5	0.6	6500	20.5	0.58	7.6	0.3	75	38.6	36g	①
LWAD5025KH-02	5	0.5	6000	18.9	0.54	6.5	0.26	64	36.9	36g	②
LWAD5025KM-03	5	0.4	5500	17.3	0.49	5.5	0.22	54	35	36g	③
LWAD5025KL-04	5	0.35	5000	15.8	0.45	4.5	0.18	44	32.9	36g	④
LWAD5025KD-05	5	0.26	4500	14.2	0.4	3.7	0.14	36	30.6	36g	⑤
LWAD5025LX-01	12	0.28	6500	20.5	0.58	7.6	0.3	75	38.6	36g	①
LWAD5025LH-02	12	0.24	6000	18.9	0.54	6.5	0.26	64	36.9	36g	②
LWAD5025LM-03	12	0.2	5500	17.3	0.49	5.5	0.22	54	35	36g	③
LWAD5025LL-04	12	0.16	5000	15.8	0.45	4.5	0.18	44	32.9	36g	④
LWAD5025LD-05	12	0.12	4500	14.2	0.4	3.7	0.14	36	30.6	36g	⑤
LWAD5025MX-01	24	0.18	6500	20.5	0.58	7.6	0.3	75	38.6	36g	①
LWAD5025MH-02	24	0.16	6000	18.9	0.54	6.5	0.26	64	36.9	36g	②
LWAD5025MM-03	24	0.14	5500	17.3	0.49	5.5	0.22	54	35	36g	③
LWAD5025ML-04	24	0.12	5000	15.8	0.45	4.5	0.18	44	32.9	36g	④
LWAD5025MD-05	24	0.1	4500	14.2	0.4	3.7	0.14	36	30.6	36g	⑤

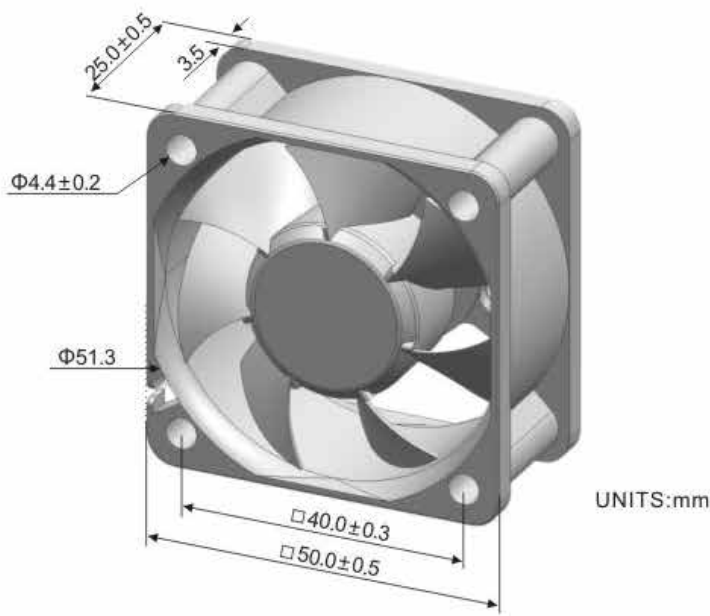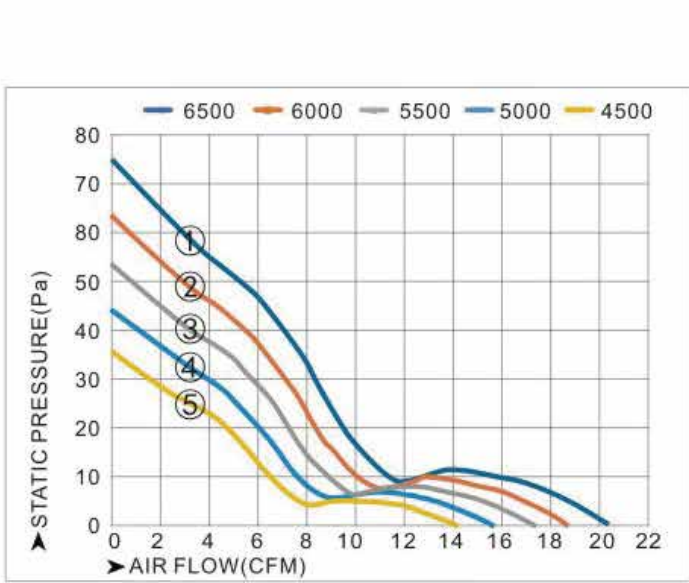

LWAD6010 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD6010KX-01	5	0.4	6000	18.4	0.52	5	0.2	49	40.1	28g	①
LWAD6010KH-02	5	0.35	5000	15.3	0.43	3.5	0.14	34	36.1	28g	②
LWAD6010KM-03	5	0.32	4000	12.3	0.35	2.2	0.09	22	31.3	28g	③
LWAD6010KL-04	5	0.22	3000	9.2	0.26	1.2	0.05	12	25	28g	④
LWAD6010KD-05	5	0.15	2000	6.1	0.17	0.6	0.02	5	16.2	28g	⑤
LWAD6010LX-01	12	0.2	6000	18.4	0.52	5	0.2	49	40.1	28g	①
LWAD6010LH-02	12	0.18	5000	15.3	0.43	3.5	0.14	34	36.1	28g	②
LWAD6010LM-03	12	0.16	4000	12.3	0.35	2.2	0.09	22	31.3	28g	③
LWAD6010LL-04	12	0.1	3000	9.2	0.26	1.2	0.05	12	25	28g	④
LWAD6010LD-05	12	0.06	2000	6.1	0.17	0.6	0.02	5	16.2	28g	⑤
LWAD6010MX-01	24	0.15	6000	18.4	0.52	5	0.2	49	40.1	28g	①
LWAD6010MH-02	24	0.12	5000	15.3	0.43	3.5	0.14	34	36.1	28g	②
LWAD6010MM-03	24	0.1	4000	12.3	0.35	2.2	0.09	22	31.3	28g	③
LWAD6010ML-04	24	0.08	3000	9.2	0.26	1.2	0.05	12	25	28g	④
LWAD6010MD-05	24	0.06	2000	6.1	0.17	0.6	0.02	5	16.2	28g	⑤

