

LWAD6015 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWAD6015KX-01	5	0.6	5000	20.9	0.59	5.8	0.23	57	39.8	39g	①
LWAD6015KH-02	5	0.5	4500	18.8	0.53	4.7	0.18	46	37.5	39g	②
LWAD6015KM-03	5	0.45	4000	16.7	0.47	3.7	0.15	36	35	39g	③
LWAD6015KL-04	5	0.4	3500	14.6	0.41	2.8	0.11	28	32.1	39g	④
LWAD6015KD-05	5	0.3	3000	12.5	0.36	2.1	0.08	20	28.7	39g	⑤
LWAD6015LX-01	12	0.3	5000	20.9	0.59	5.8	0.23	57	39.8	39g	①
LWAD6015LH-02	12	0.25	4500	18.8	0.53	4.7	0.18	46	37.5	39g	②
LWAD6015LM-03	12	0.22	4000	16.7	0.47	3.7	0.15	36	35	39g	③
LWAD6015LL-04	12	0.2	3500	14.6	0.41	2.8	0.11	28	32.1	39g	④
LWAD6015LD-05	12	0.15	3000	12.5	0.36	2.1	0.08	20	28.7	39g	⑤
LWAD6015MX-01	24	0.2	5000	20.9	0.59	5.8	0.23	57	39.8	39g	①
LWAD6015MH-02	24	0.16	4500	18.8	0.53	4.7	0.18	46	37.5	39g	②
LWAD6015MM-03	24	0.14	4000	16.7	0.47	3.7	0.15	36	35	39g	③
LWAD6015ML-04	24	0.12	3500	14.6	0.41	2.8	0.11	28	32.1	39g	④
LWAD6015MD-05	24	0.1	3000	12.5	0.36	2.1	0.08	20	28.7	39g	⑤

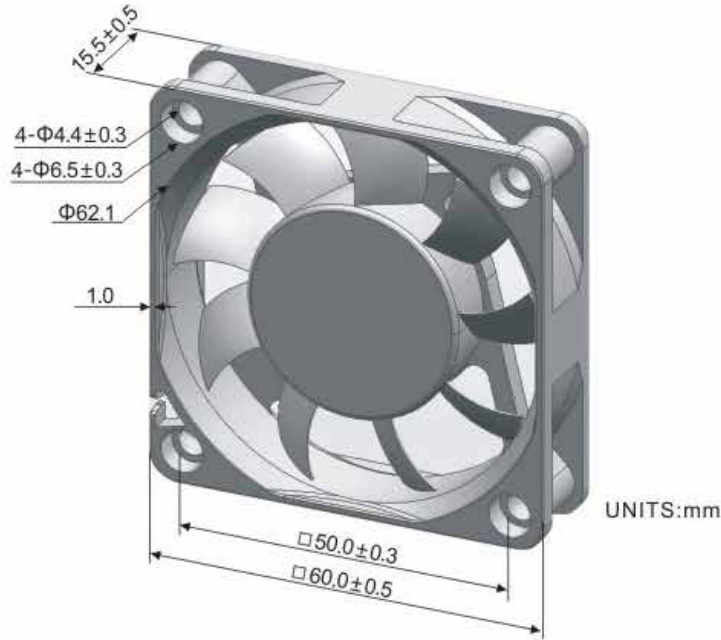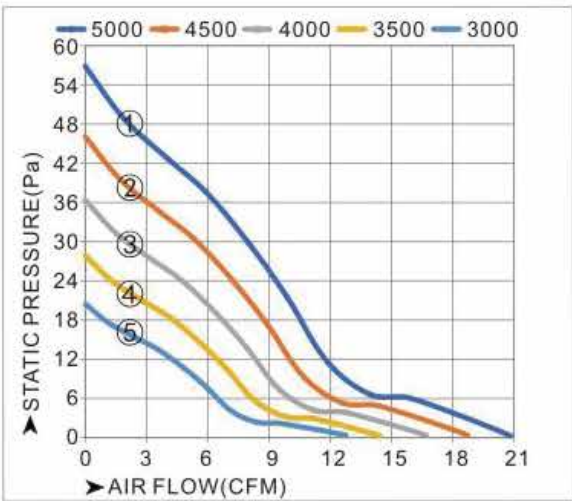

LWAD6020 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC), 24VDC(12~27.6VDC), 48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch-H2O	Pa	dBA	g	
LWAD6020LX-01	12	0.55	8000	33.7	0.95	13.6	0.54	133	49.9	52g	①
LWAD6020LH-02	12	0.5	6700	29.5	0.8	10.4	0.38	102	46	52g	②
LWAD6020LM-03	12	0.4	6000	25.3	0.72	7.6	0.3	75	43.7	52g	③
LWAD6020LL-04	12	0.3	5000	21.1	0.57	5.3	0.21	52	39.7	52g	④
LWAD6020LD-05	12	0.2	4000	16.9	0.45	3.4	0.13	33	34.8	52g	⑤
LWAD6020MX-01	24	0.3	8000	33.7	0.95	13.6	0.54	133	49.9	52g	①
LWAD6020MH-02	24	0.25	7000	29.5	0.84	10.4	0.41	102	47	52g	②
LWAD6020MM-03	24	0.2	6000	25.3	0.72	7.6	0.3	75	43.7	52g	③
LWAD6020ML-04	24	0.15	5000	21.1	0.6	5.3	0.21	52	39.7	52g	④
LWAD6020MD-05	24	0.1	4000	16.9	0.48	3.4	0.13	33	34.8	52g	⑤
LWAD6020HX-01	48	0.16	8000	33.7	0.95	13.6	0.54	133	49.9	52g	①
LWAD6020HH-02	48	0.14	7000	29.5	0.84	10.4	0.41	102	47	52g	②
LWAD6020HM-03	48	0.12	6000	25.3	0.72	7.6	0.3	75	43.7	52g	③
LWAD6020HL-04	48	0.1	5000	21.1	0.6	5.3	0.21	52	39.7	52g	④
LWAD6020HD-05	48	0.08	4000	16.9	0.48	3.4	0.13	33	34.8	52g	⑤

