

LWAD6025 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD6025LX-01	12	1.2	10000	50.5	1.43	26.1	1.03	256	54.5	70g	①
LWAD6025LX-02	12	1.2	9000	45.5	1.29	21.1	0.83	207	52.2	70g	②
LWAD6025LX-03	12	1.2	8000	40.4	1.14	16.7	0.66	164	49.7	70g	③
LWAD6025LH-03	12	0.6	7000	35.4	1	12.8	0.5	125	46.8	70g	④
LWAD6025LM-04	12	0.5	6000	30.3	0.86	9.4	0.37	92	43.4	70g	⑤
LWAD6025LL-05	12	0.4	5000	25.3	0.72	6.5	0.26	64	39.4	70g	⑥
LWAD6025LD-06	12	0.3	4000	20.2	0.57	4.2	0.16	41	34.6	70g	⑦
LWAD6025MX-01	24	0.6	10000	50.5	1.43	26.1	1.03	256	54.5	70g	①
LWAD6025MX-02	24	0.6	9000	45.5	1.29	21.1	0.83	207	52.2	70g	②
LWAD6025MX-03	24	0.6	8000	40.4	1.14	16.7	0.66	164	49.7	70g	③
LWAD6025MH-03	24	0.35	7000	35.4	1	12.8	0.5	125	46.8	70g	④
LWAD6025MM-04	24	0.3	6000	30.3	0.86	9.4	0.37	92	43.4	70g	⑤
LWAD6025ML-05	24	0.25	5000	25.3	0.72	6.5	0.26	64	39.4	70g	⑥
LWAD6025MD-06	24	0.2	4000	20.2	0.57	4.2	0.16	41	34.6	70g	⑦
LWAD6025HX-01	48	0.4	10000	50.5	1.43	26.1	1.03	256	54.5	70g	①
LWAD6025HX-02	48	0.4	9000	45.5	1.29	21.1	0.83	207	52.2	70g	②
LWAD6025HX-03	48	0.4	8000	40.4	1.14	16.7	0.66	164	49.7	70g	③
LWAD6025HH-03	48	0.25	7000	35.4	1	12.8	0.5	125	46.8	70g	④
LWAD6025HM-04	48	0.2	6000	30.3	0.86	9.4	0.37	92	43.4	70g	⑤
LWAD6025HL-05	48	0.15	5000	25.3	0.72	6.5	0.26	64	39.4	70g	⑥
LWAD6025HD-06	48	0.1	4000	20.2	0.57	4.2	0.16	41	34.6	70g	⑦

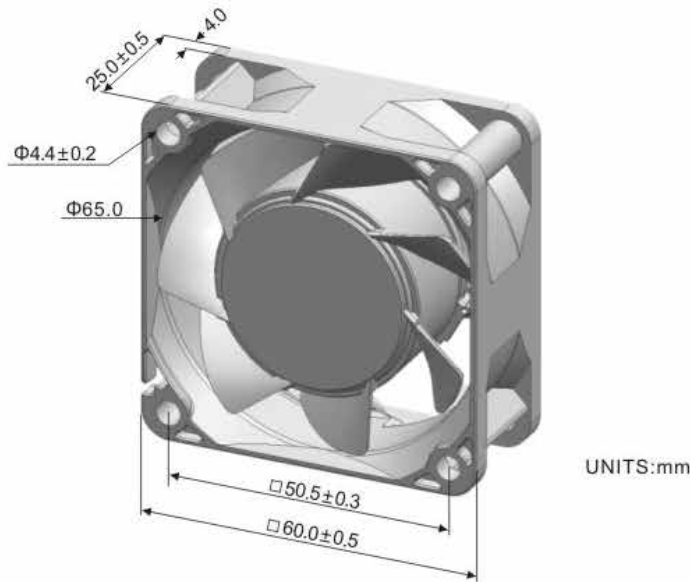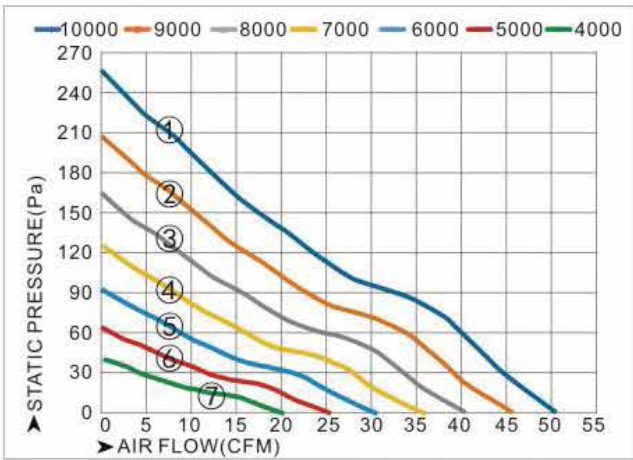

LWAD6038 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD6038LX-01	12	1	9500	52.1	1.48	25.4	1	249	57.3	90g	①
LWAD6038LH-02	12	0.8	8500	46.6	1.32	20.4	0.8	200	54.9	90g	②
LWAD6038LM-03	12	0.6	7500	41.2	1.17	15.9	0.62	155	52.2	90g	③
LWAD6038LL-04	12	0.4	6500	35.7	1.01	11.9	0.47	117	49.1	90g	④
LWAD6038LD-05	12	0.3	5500	30.2	0.85	8.5	0.34	84	45.5	90g	⑤
LWAD6038MX-01	24	0.7	9500	52.1	1.48	25.4	1	249	57.3	90g	①
LWAD6038MH-02	24	0.5	8500	46.6	1.32	20.4	0.8	200	54.9	90g	②
LWAD6038MM-03	24	0.4	7500	41.2	1.17	15.9	0.62	155	52.2	90g	③
LWAD6038ML-04	24	0.25	6500	35.7	1.01	11.9	0.47	117	49.1	90g	④
LWAD6038MD-05	24	0.2	5500	30.2	0.85	8.5	0.34	84	45.5	90g	⑤
LWAD6038HX-01	48	0.4	9500	52.1	1.48	25.4	1	249	57.3	90g	①
LWAD6038HH-02	48	0.28	8500	46.6	1.32	20.4	0.8	200	54.9	90g	②
LWAD6038HM-03	48	0.2	7500	41.2	1.17	15.9	0.62	155	52.2	90g	③
LWAD6038HL-04	48	0.15	6500	35.7	1.01	11.9	0.47	117	49.1	90g	④
LWAD6038HD-05	48	0.12	5500	30.2	0.85	8.5	0.34	84	45.5	90g	⑤

