

LWAD8010 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD8010KX-01	5	0.45	4000	46.8	1.32	4.2	0.17	41	40	28g	①
LWAD8010KH-02	5	0.4	3500	40.9	1.16	3.2	0.13	32	37.1	28g	②
LWAD8010KM-03	5	0.35	3000	35.1	0.99	2.4	0.09	23	33.8	28g	③
LWAD8010KL-04	5	0.25	2500	29.2	0.83	1.7	0.07	16	29.8	28g	④
LWAD8010KD-05	5	0.15	2000	23.4	0.66	1.1	0.04	10	24.9	28g	⑤
LWAD8010LX-01	12	0.2	4000	46.8	1.32	4.2	0.17	41	40	28g	①
LWAD8010LH-02	12	0.18	3500	40.9	1.16	3.2	0.13	32	37.1	28g	②
LWAD8010LM-03	12	0.16	30000	35.1	0.99	2.4	0.09	23	33.8	28g	③
LWAD8010LL-04	12	0.1	2500	29.2	0.83	1.7	0.07	16	29.8	28g	④
LWAD8010LD-05	12	0.06	2000	23.4	0.66	1.1	0.04	10	24.9	28g	⑤
LWAD8010MX-01	24	0.12	4000	46.8	1.32	4.2	0.17	41	40	28g	①
LWAD8010MH-02	24	0.1	3500	40.9	1.16	3.2	0.13	32	37.1	28g	②
LWAD8010MM-03	24	0.09	3000	35.1	0.99	2.4	0.09	23	33.8	28g	③
LWAD8010ML-04	24	0.07	2500	29.2	0.83	1.7	0.07	16	29.8	28g	④
LWAD8010MD-05	24	0.06	2000	23.4	0.66	1.1	0.04	10	24.9	28g	⑤

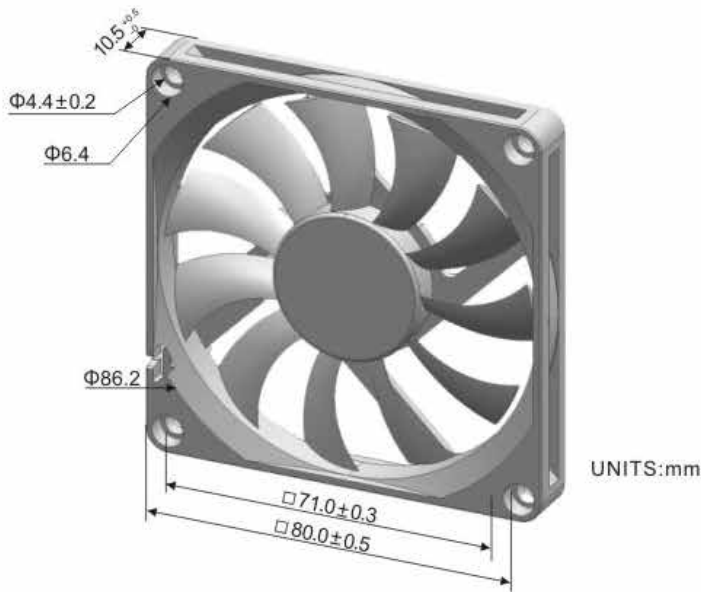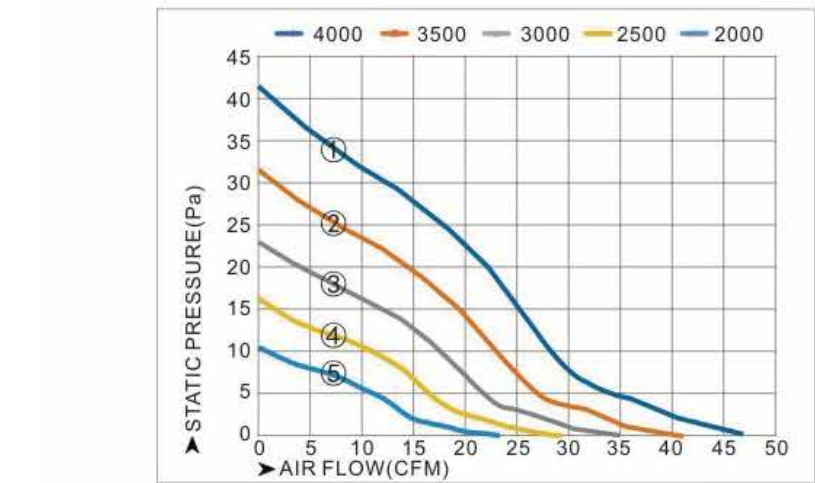

LWAD8015 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 5VDC(4.0~5.5VDC), 12VDC(6~13.8VDC), 24VDC(12~27.6VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD8015KX-01	5	0.65	3500	40.6	1.15	3.7	0.15	36	36.1	50g	①
LWAD8015KH-02	5	0.5	3000	34.8	0.99	2.7	0.11	27	32.8	50g	②
LWAD8015KM-03	5	0.4	2500	29	0.82	1.9	0.07	18	28.8	50g	③
LWAD8015KL-04	5	0.3	2000	23.2	0.66	1.2	0.05	12	23.9	50g	④
LWAD8015KD-05	5	0.2	1500	17.4	0.49	0.7	0.03	7	17.7	50g	⑤
LWAD8015LX-01	12	0.3	3500	40.6	1.15	3.7	0.15	36	36.1	50g	①
LWAD8015LH-02	12	0.25	3000	34.8	0.99	2.7	0.11	27	32.8	50g	②
LWAD8015LM-03	12	0.2	2500	29	0.82	1.9	0.07	18	28.8	50g	③
LWAD8015LL-04	12	0.15	2000	23.2	0.66	1.2	0.05	12	23.9	50g	④
LWAD8015LD-05	12	0.1	1500	17.4	0.49	0.7	0.03	7	17.7	50g	⑤
LWAD8015MX-01	24	0.15	3500	40.6	1.15	3.7	0.15	36	36.1	50g	①
LWAD8015MH-02	24	0.13	3000	34.8	0.99	2.7	0.11	27	32.8	50g	②
LWAD8015MM-03	24	0.1	2500	29	0.82	1.9	0.07	18	28.8	50g	③
LWAD8015ML-04	24	0.08	2000	23.2	0.66	1.2	0.05	12	23.9	50g	④
LWAD8015MD-05	24	0.06	1500	17.4	0.49	0.7	0.03	7	17.7	50g	⑤

