

LWAD8025 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:



Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD8025LX-10	12	1.6	10000	113.3	3.21	31.9	1.26	313	62.7	95g	①
LWAD8025LH-11	12	1.2	9000	102	2.89	25.9	1.02	254	60.4	95g	②
LWAD8025LM-12	12	0.8	8000	90.6	2.57	20.4	0.8	200	57.9	95g	③
LWAD8025LL-13	12	0.6	7000	79.3	2.25	15.7	0.62	153	55	95g	④
LWAD8025LD-14	12	0.4	6000	68	1.92	11.5	0.45	113	51.6	95g	⑤
LWAD8025MX-10	24	1.2	10000	113.3	3.21	31.9	1.26	313	62.7	95g	①
LWAD8025MH-11	24	0.8	9000	102	2.89	25.9	1.02	254	60.4	95g	②
LWAD8025MM-12	24	0.6	8000	90.6	2.57	20.4	0.8	200	57.9	95g	③
LWAD8025ML-13	24	0.5	7000	79.3	2.25	15.7	0.62	153	55	95g	④
LWAD8025MD-14	24	0.3	6000	68	1.92	11.5	0.45	113	51.6	95g	⑤
LWAD8025HX-10	48	0.5	10000	113.3	3.21	31.9	1.26	313	62.7	95g	④
LWAD8025HH-11	48	0.4	9000	102	2.89	25.9	1.02	254	60.4	95g	②
LWAD8025HM-12	48	0.3	8000	90.6	2.57	20.4	0.8	200	57.9	95g	③
LWAD8025HL-13	48	0.2	7000	79.3	2.25	15.7	0.62	153	55	95g	④
LWAD8025HD-14	48	0.15	6000	68	1.92	11.5	0.45	113	51.6	95g	⑤

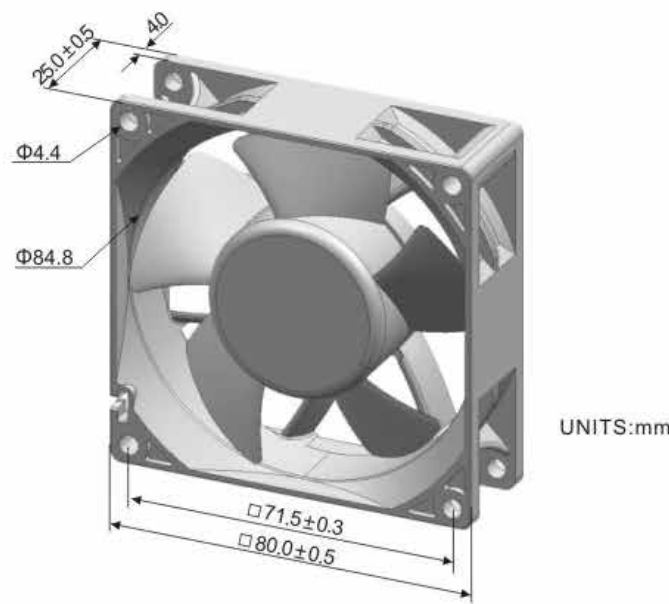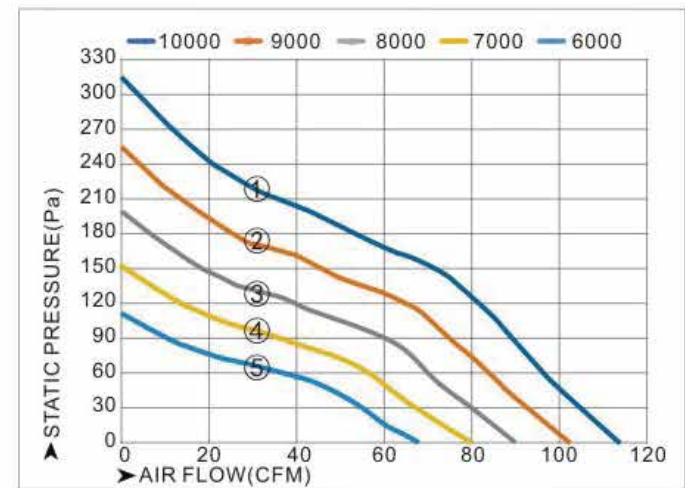

LWAD8025 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:

Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD8025LX-15	12	1.6	5000	74.7	2.11	11.6	0.46	114	50.6	90g	①
LWAD8025LH-16	12	1.2	4500	67.2	1.9	9.4	0.37	92	48.3	90g	②
LWAD8025LM-17	12	0.8	4000	59.7	1.69	7.4	0.29	73	45.8	90g	③
LWAD8025LL-18	12	0.6	3500	52.3	0.57	5.7	0.22	56	42.9	90g	④
LWAD8025LD-19	12	0.4	3000	44.8	1.27	4.2	0.16	41	39.5	90g	⑤
LWAD8025MX-15	24	1.2	5000	74.7	2.11	11.6	0.46	114	50.6	90g	①
LWAD8025MH-16	24	0.8	4500	672	1.9	9.4	0.37	92	48.3	90g	②
LWAD8025MM-17	24	0.6	4000	59.7	1.69	7.4	0.29	73	45.8	90g	③
LWAD8025ML-18	24	0.5	3500	52.3	0.57	5.7	0.22	56	42.9	90g	④
LWAD8025MD-19	24	0.3	3000	44.8	1.27	4.2	0.16	41	39.5	90g	⑤
LWAD8025HX-15	48	0.5	5000	74.7	2.11	11.6	0.46	114	50.6	90g	①
LWAD8025HH-16	48	0.4	4500	672	1.9	9.4	0.37	92	48.3	90g	②
LWAD8025HM-17	48	0.3	4000	59.7	1.69	7.4	0.29	73	45.8	90g	③
LWAD8025HL-18	48	0.2	3500	52.3	0.57	5.7	0.22	56	42.9	90g	④
LWAD8025HD-19	48	0.15	3000	44.8	1.27	4.2	0.16	41	39.5	90g	⑤

