

LWAD8038 Series



Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD8038LX-01	12	3.5	6500	108.7	3.08	30.9	1.22	303	58	179g	①
LWAD8038LH-02	12	1.2	5500	92	2.6	22.1	0.87	217	54.4	179g	②
LWAD8038LM-03	12	1	4500	75.2	2.13	14.8	0.58	145	50	179g	③
LWAD8038LL-04	12	0.8	3500	58.5	1.66	9	0.35	88	44.6	179g	④
LWAD8038MX-01	24	1.6	6500	108.7	3.08	30.9	1.22	303	58	179g	①
LWAD8038MH-02	24	0.8	5500	92	2.6	22.1	0.87	217	54.4	179g	②
LWAD8038MM-03	24	0.5	4500	75.2	2.13	14.8	0.58	145	50	179g	③
LWAD8038ML-04	24	0.4	3500	58.5	1.66	9	0.35	88	44.6	179g	④
LWAD8038HX-01	48	1	6500	108.7	3.08	30.9	1.22	303	58	179g	①
LWAD8038HH-02	48	0.35	5500	92	2.6	22.1	0.87	217	54.4	179g	②
LWAD8038HM-03	48	0.3	4500	75.2	2.13	14.8	0.58	145	50	179g	③
LWAD8038HL-04	48	0.25	3500	58.5	1.66	9	0.35	88	44.6	179g	④

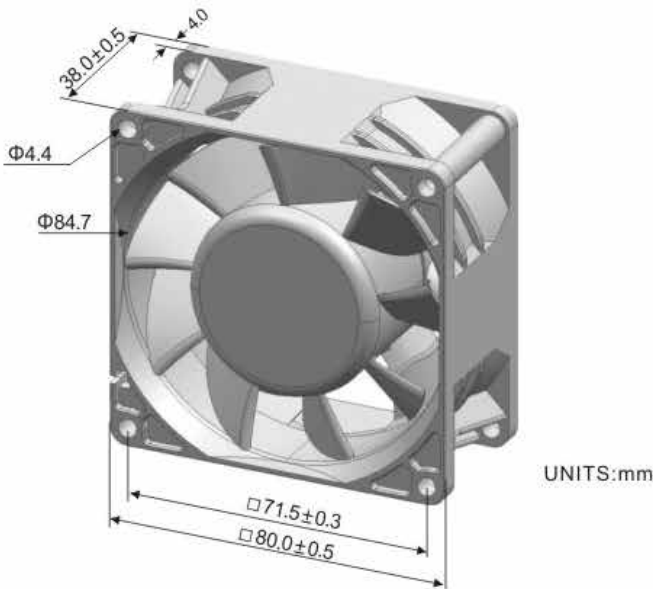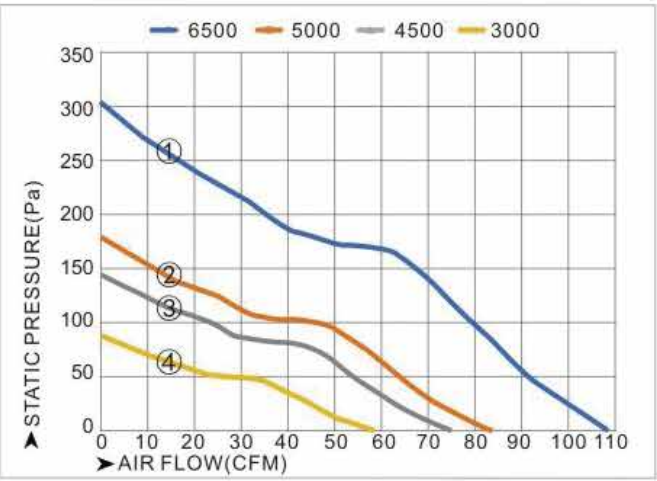

LWAD8038 Series

Product Characteristic

- Material: Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage: 12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature: Operation Temperature: -10~70°C(Non-condensing)
- Specials: AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD8038LX-05	12	3.5	13500	129.7	3.67	68.6	2.7	672	65	195g	①
LWAD8038LX-06	12	3.5	12000	115.3	3.26	54.2	2.13	531	62.4	195g	②
LWAD8038LX-07	12	3.5	11000	105.7	2.99	45.5	1.79	446	60.6	195g	③
LWAD8038LX-08	12	3.5	10000	96.1	2.72	37.6	1.48	369	58.5	195g	④
LWAD8038LH-09	12	1.2	9000	86.5	2.45	30.5	1.2	299	56.2	195g	⑤
LWAD8038LM-10	12	1	8000	76.8	2.18	24.1	0.95	236	53.6	195g	⑥
LWAD8038LL-11	12	0.8	7000	67.2	1.9	18.4	0.73	181	50.7	195g	⑦
LWAD8038LD-12	12	0.6	6000	57.6	1.63	13.5	0.53	133	47.4	195g	⑧
LWAD8038MX-05	24	1.6	13500	129.7	3.67	68.6	2.7	672	65	195g	①
LWAD8038MX-06	24	1.6	12000	115.3	3.26	54.2	2.13	531	62.4	195g	②
LWAD8038MX-07	24	1.6	11000	105.7	2.99	45.5	1.79	446	60.6	195g	③
LWAD8038MX-08	24	1.6	10000	96.1	2.72	37.6	1.48	369	58.5	195g	④
LWAD8038MH-09	24	0.8	9000	86.5	2.45	30.5	1.2	299	56.2	195g	⑤
LWAD8038MM-10	24	0.5	8000	76.8	2.18	24.1	0.95	236	53.6	195g	⑥
LWAD8038ML-11	24	0.4	7000	67.2	1.9	18.4	0.73	181	50.7	195g	⑦
LWAD8038MD-12	24	0.3	6000	57.6	1.63	13.5	0.53	133	47.4	195g	⑧
LWAD8038HX-05	48	1	13500	129.7	3.67	68.6	2.7	672	65	195g	①
LWAD8038HX-06	48	1	12000	115.3	3.26	54.2	2.13	531	62.4	195g	②
LWAD8038HX-07	48	1	11000	105.7	2.99	45.5	1.79	446	60.6	195g	③
LWAD8038HX-08	48	1	10000	96.1	2.72	37.6	1.48	369	58.5	195g	④
LWAD8038HH-09	48	0.35	9000	86.5	2.45	30.5	1.2	299	56.2	195g	⑤
LWAD8038HM-10	48	0.3	8000	76.8	2.18	24.1	0.95	236	53.6	195g	⑥
LWAD8038HL-11	48	0.25	7000	67.2	1.9	18.4	0.73	181	50.7	195g	⑦
LWAD8038HD-12	48	0.2	6000	57.6	1.63	13.5	0.53	133	47.4	195g	⑧

