

LWAD9220 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:



Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD9220LX-01	12	0.3	3000	57.8	1.64	3.6	0.14	36	36.6	83g	①
LWAD9220LH-02	12	0.25	2500	48.1	1.36	2.5	0.1	25	32.6	83g	②
LWAD9220LM-03	12	0.2	2000	38.5	1.09	1.6	0.06	16	27.8	83g	③
LWAD9220LL-04	12	0.15	1500	28.9	0.57	0.9	0.04	9	21.5	83g	④
LWAD9220MX-01	24	0.2	3000	57.8	1.64	3.6	0.14	36	36.6	83g	①
LWAD9220MH-02	24	0.18	2500	48.1	1.36	2.5	0.1	25	32.6	83g	②
LWAD9220MM-03	24	0.15	2000	38.5	1.09	1.6	0.06	16	27.8	83g	③
LWAD9220ML-04	24	0.12	1500	28.9	0.57	0.9	0.04	9	21.5	83g	④
LWAD9220HX-01	48	0.15	3000	57.8	1.64	3.6	0.14	36	36.6	83g	①
LWAD9220HH-02	48	0.12	2500	48.1	1.36	2.5	0.1	25	32.6	83g	②
LWAD9220HM-03	48	0.1	2000	38.5	1.09	1.6	0.06	16	27.8	83g	③
LWAD9220HL-04	48	0.08	1500	28.9	0.57	0.9	0.04	9	21.5	83g	④

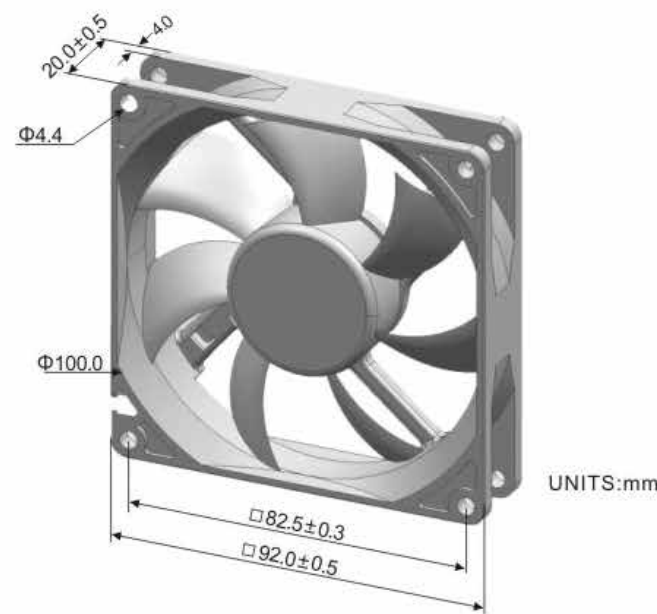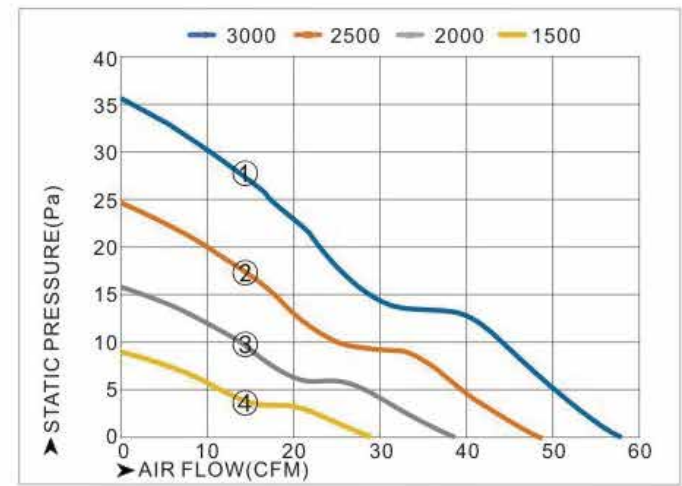

LWAD9225 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:

Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD9225LX-01	12	1.5	6500	118.7	3.36	19.3	0.76	189	54.5	124g	①
LWAD9225LX-02	12	1.5	6000	109.5	3.1	16.4	0.65	161	52.8	124g	②
LWAD9225LX-03	12	1.5	5500	100.4	2.84	13.8	0.54	135	50.9	124g	③
LWAD9225LX-04	12	1.5	5000	91.3	2.58	11.4	0.45	112	48.8	124g	④
LWAD9225LX-05	12	1.5	4500	82.1	2.33	9.2	0.36	91	46.5	124g	⑤
LWAD9225LH-06	12	0.6	4000	73	2.07	7.3	0.29	72	44	124g	⑥
LWAD9225LM-07	12	0.5	3500	63.9	1.81	5.6	0.22	55	41.1	124g	⑦
LWAD9225LL-08	12	0.4	3000	54.8	1.55	4.1	0.16	40	37.7	124g	⑧
LWAD9225LD-09	12	0.3	2500	45.6	1.29	2.9	0.11	28	33.8	124g	⑨
LWAD9225LX-01	24	0.8	6500	118.7	3.36	19.3	0.76	189	54.5	124g	①
LWAD9225LX-02	24	0.8	6000	109.5	3.1	16.4	0.65	161	52.8	124g	②
LWAD9225LX-03	24	0.8	5500	100.4	2.84	13.8	0.54	135	50.9	124g	③
LWAD9225LX-04	24	0.8	5000	91.3	2.58	11.4	0.45	112	48.8	124g	④
LWAD9225LX-05	24	0.8	4500	82.1	2.33	9.2	0.36	91	46.5	124g	⑤
LWAD9225LH-06	24	0.35	4000	73	2.07	7.3	0.29	72	44	124g	⑥
LWAD9225LM-07	24	0.3	3500	63.9	1.81	5.6	0.22	55	41.1	124g	⑦
LWAD9225LL-08	24	0.25	3000	54.8	1.55	4.1	0.16	40	37.7	124g	⑧
LWAD9225LD-09	24	0.2	2500	45.6	1.29	2.9	0.11	28	33.8	124g	⑨
LWAD9225HX-01	48	0.5	6500	118.7	3.36	19.3	0.76	189	54.5	124g	①
LWAD9225HX-02	48	0.5	6000	109.5	3.1	16.4	0.65	161	52.8	124g	②
LWAD9225HX-03	48	0.5	5500	100.4	2.84	13.8	0.54	135	50.9	124g	③
LWAD9225HX-04	48	0.5	5000	91.3	2.58	11.4	0.45	112	48.8	124g	④
LWAD9225HX-05	48	0.5	4500	82.1	2.33	9.2	0.36	91	46.5	124g	⑤
LWAD9225HH-06	48	0.25	4000	73	2.07	7.3	0.29	72	44	124g	⑥
LWAD9225HM-07	48	0.2	3500	63.9	1.81	5.6	0.22	55	41.1	124g	⑦
LWAD9225HL-08	48	0.15	3000	54.8	1.55	4.1	0.16	40	37.7	124g	⑧
LWAD9225HD-09	48	0.1	2500	45.6	1.29	2.9	0.11	28	33.8	124g	⑨

