

LWAD9225 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:



Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD9225LX-10	12	1.5	4000	81.2	2.3	8.4	0.33	83	51.5	112g	①
LWAD9225LH-11	12	0.6	3500	71	2.01	6.5	0.25	63	48.6	112g	②
LWAD9225LM-12	12	0.5	3000	60.9	1.72	4.7	0.19	46	45.3	112g	③
LWAD9225LL-13	12	0.4	2500	50.7	0.57	3.3	0.13	32	41.3	112g	④
LWAD9225LD-14	12	0.3	2000	40.6	1.15	2.1	0.08	21	36.4	112g	⑤
LWAD9225MX-10	24	0.8	4000	81.2	2.3	8.4	0.33	83	51.5	112g	①
LWAD9225MH-11	24	0.35	3500	71	2.01	6.5	0.25	63	48.6	112g	②
LWAD9225MM-12	24	0.3	3000	60.9	1.72	4.7	0.19	46	45.3	112g	③
LWAD9225ML-13	24	0.25	2500	50.7	0.57	3.3	0.13	32	41.3	112g	④
LWAD9225MD-14	24	0.2	2000	40.6	1.15	2.1	0.08	21	36.4	112g	⑤
LWAD9225HX-10	48	0.5	4000	81.2	2.3	8.4	0.33	83	51.5	112g	①
LWAD9225HH-11	48	0.25	3500	71	2.01	6.5	0.25	63	48.6	112g	②
LWAD9225HM-12	48	0.2	3000	60.9	1.72	4.7	0.19	46	45.3	112g	③
LWAD9225HL-13	48	0.15	2500	50.7	0.57	3.3	0.13	32	41.3	112g	④
LWAD9225HD-14	48	0.1	2000	40.6	1.15	2.1	0.08	21	36.4	112g	⑤

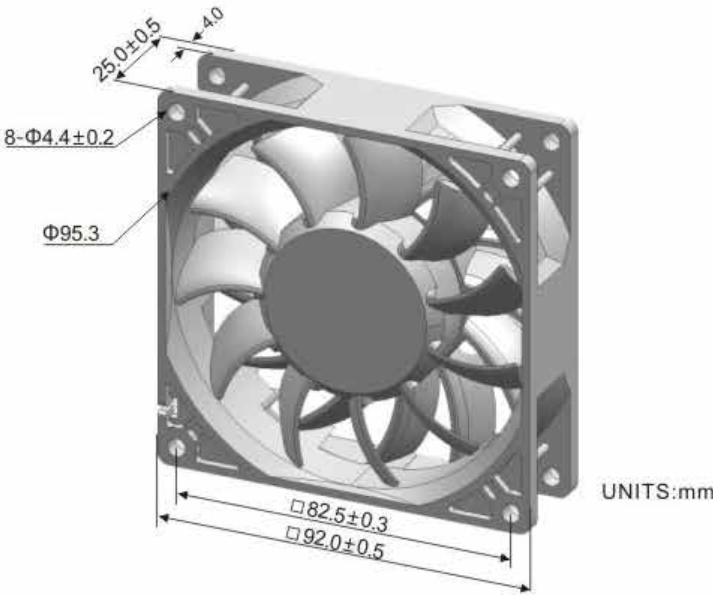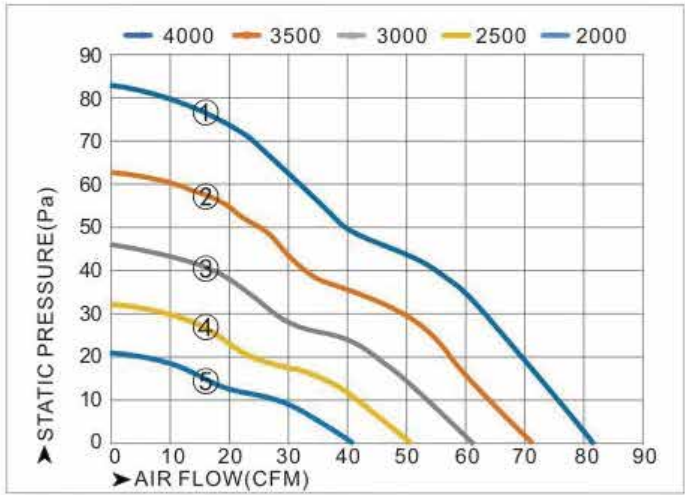

LWAD9238 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:

Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- -H2O	Pa	dBA	g	
LWAD9238LX-01	12	4	5500	133.5	3.78	21	0.83	206	56.5	188g	①
LWAD9238LH-02	12	3	5000	121.4	3.44	17.3	0.68	170	54.4	188g	②
LWAD9238LM-03	12	2	4500	109.2	3.09	14	0.55	138	52.1	188g	③
LWAD9238LL-04	12	1.5	4000	97.1	2.75	11.1	0.44	109	49.6	188g	④
LWAD9238LD-05	12	1.2	3500	84.9	2.41	8.5	0.33	83	46.7	188g	⑤
LWAD9238MX-01	24	2	5500	133.5	3.78	21	0.83	206	56.5	188g	①
LWAD9238MH-02	24	1.5	5000	121.4	3.44	17.3	0.68	170	54.4	188g	②
LWAD9238MM-03	24	1	4500	109.2	3.09	14	0.55	138	52.1	188g	④
LWAD9238ML-04	24	0.8	4000	97.1	2.75	11.1	0.44	109	49.6	188g	④
LWAD9238MD-05	24	0.6	3500	84.9	2.41	8.5	0.33	83	46.7	188g	⑤
LWAD9238HX-01	48	1.2	5500	133.5	3.78	21	0.83	206	56.5	188g	①
LWAD9238HH-02	48	1	5000	121.4	3.44	17.3	0.68	170	54.4	188g	②
LWAD9238HM-03	48	0.8	4500	109.2	3.09	14	0.55	138	52.1	188g	③
LWAD9238HL-04	48	0.6	4000	97.1	2.75	11.1	0.44	109	49.6	188g	④
LWAD9238HD-05	48	0.4	3500	84.9	2.41	8.5	0.33	83	46.7	188g	⑤

