

LWAD9238 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:



Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD9238LX-05	12	4	11000	172.8	4.89	49.6	1.95	486	68	206g	①
LWAD9238LH-06	12	3	10000	157.1	4.45	41	1.61	401	65.9	206g	②
LWAD9238LM-07	12	2	9000	141.4	4	33.2	1.31	325	63.6	206g	③
LWAD9238LL-08	12	1.5	8000	125.7	3.56	26.2	1.03	257	61.1	206g	④
LWAD9238LD-09	12	1.2	7000	110	3.11	20.1	0.79	197	58.2	206g	⑤
LWAD9238MX-05	24	2	11000	172.8	4.89	49.6	1.95	486	68	206g	①
LWAD9238MH-06	24	1.5	10000	157.1	4.45	41	1.61	401	65.9	206g	②
LWAD9238MM-07	24	1	9000	141.4	4	33.2	1.31	325	63.6	206g	③
LWAD9238ML-08	24	0.8	8000	125.7	3.56	26.2	1.03	257	61.1	206g	④
LWAD9238MD-09	24	0.6	7000	110	3.11	20.1	0.79	197	58.2	206g	⑤
LWAD9238HX-05	48	1.2	11000	172.8	4.89	49.6	1.95	486	68	206g	①
LWAD9238HH-06	48	1	10000	157.1	4.45	41	1.61	401	65.9	206g	②
LWAD9238HM-07	48	0.8	9000	141.4	4	33.2	1.31	325	63.6	206g	③
LWAD9238HL-08	48	0.6	8000	125.7	3.56	26.2	1.03	257	61.1	206g	④
LWAD9238HD-09	48	0.4	7000	110	3.11	20.1	0.79	197	58.2	206g	⑤

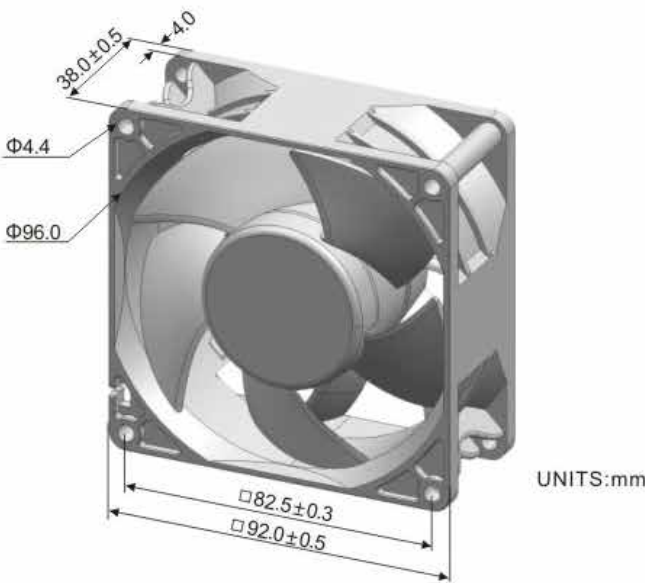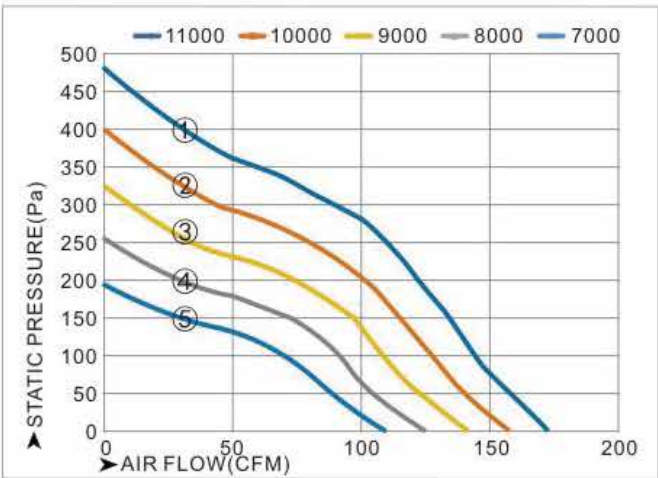

LWAD12025 Series

Product Characteristic

- Material:

Frame: Plastic(UL94-VO) Impeller: Plastic(UL94-VO)
- Voltage:

12VDC(6~13.8VDC),24VDC(12~27.6VDC),48VDC(24~56VDC)
- Temperature:

Operation Temperature: -10~70°C(Non-condensing)
- Specials:

AS, RD, FG, PWM, Temperature Control, IP56, IP68



Technical Specifications

Model	Voltage	Current	Speed	Air Volume		Static Pressure			Noise	Weight	Curve
	V	A	RPM	CFM	m³/min	mm-H2O	Inch- H2O	Pa	dBA	g	
LWAD12025LX-01	12	2	4500	150.5	4.26	15.4	0.61	151	52.5	190g	①
LWAD12025LX-02	12	2	4000	133.7	3.79	12.2	0.48	119	49.9	190g	②
LWAD12025LX-03	12	2	3500	117	3.31	9.3	0.37	91	47	190g	③
LWAD12025LH-03	12	1.5	3000	100.3	2.84	6.9	0.27	67	43.7	190g	④
LWAD12025LM-04	12	1	2500	83.6	2.37	4.8	0.19	47	39.7	190g	⑤
LWAD12025LL-05	12	0.6	2000	66.9	1.89	3	0.12	30	34.8	190g	⑥
LWAD12025LD-06	12	0.3	1500	50.2	1.42	1.7	0.07	17	28.6	190g	⑦
LWAD12025MX-01	24	1	4500	150.5	4.26	15.4	0.61	151	52.5	190g	①
LWAD12025MX-02	24	1	4000	133.7	3.79	12.2	0.48	119	49.9	190g	②
LWAD12025MX-03	24	1	3500	117	3.31	9.3	0.37	91	47	190g	③
LWAD12025MH-03	24	0.8	3000	100.3	2.84	6.9	0.27	67	43.7	190g	④
LWAD12025MM-04	24	0.6	2500	83.6	2.37	4.8	0.19	47	39.7	190g	⑤
LWAD12025ML-05	24	0.5	2000	66.9	1.89	3	0.12	30	34.8	190g	⑥
LWAD12025MD-06	24	0.2	1500	50.2	1.42	1.7	0.07	17	28.6	190g	⑦
LWAD12025HX-01	48	0.8	4500	150.5	4.26	15.4	0.61	151	52.5	190g	①
LWAD12025HX-02	48	0.8	4000	133.7	3.79	12.2	0.48	119	49.9	190g	②
LWAD12025HX-03	48	0.8	3500	117	3.31	9.3	0.37	91	47	190g	③
LWAD12025HH-03	48	0.5	3000	100.3	2.84	6.9	0.27	67	43.7	190g	④
LWAD12025HM-04	48	0.4	2500	83.6	2.37	4.8	0.19	47	39.7	190g	⑤
LWAD12025HL-05	48	0.3	2000	66.9	1.89	3	0.12	30	34.8	190g	⑥
LWAD12025HD-06	48	0.1	1500	50.2	1.42	1.7	0.07	17	28.6	190g	⑦

