

LWAE-200 Serise


Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25 ℃ ~ +60 ℃
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection




Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G200SS-5PNW-01	220	50/60	0.6	80	2600	886	54
LWAE3G200ST-5PNW-02	220	50/60	0.6	80	2600	886	54
LWAE3G200SS-5PEW-03	220	50/60	0.6	80	2600	886	54
LWAE3G200ST-5PEW-04	220	50/60	0.6	80	2600	886	54
LWAE3G200SS-5PGW-05	220	50/60	0.6	80	2600	886	54
LWAE3G200ST-5PGW-06	220	50/60	0.6	80	2600	886	54

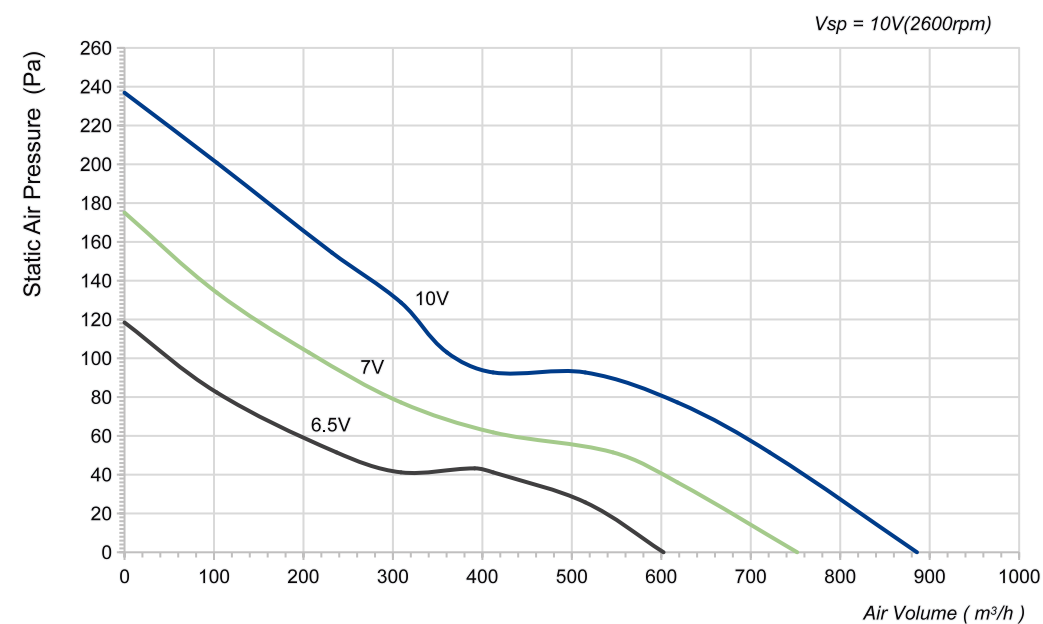


LWAE3G200SS-5PNW-01(Suction)

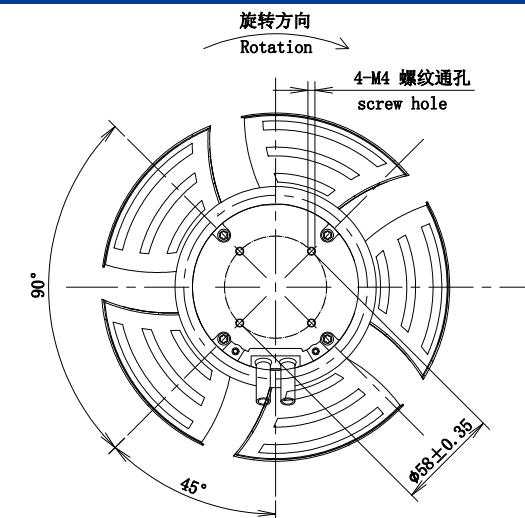


LWAE3G200ST-5PNW-02(Blowing)

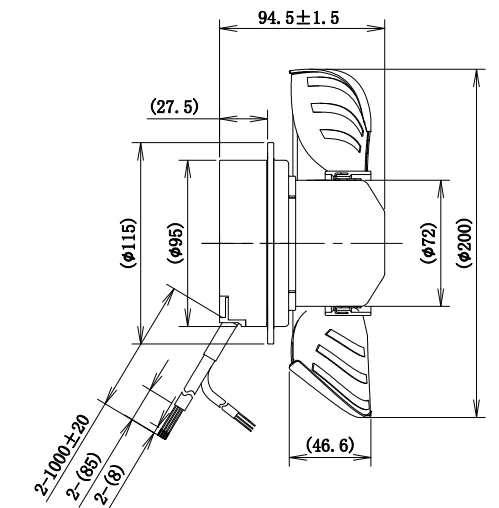


LWAE3G200SS-5PEW-03(Suction)

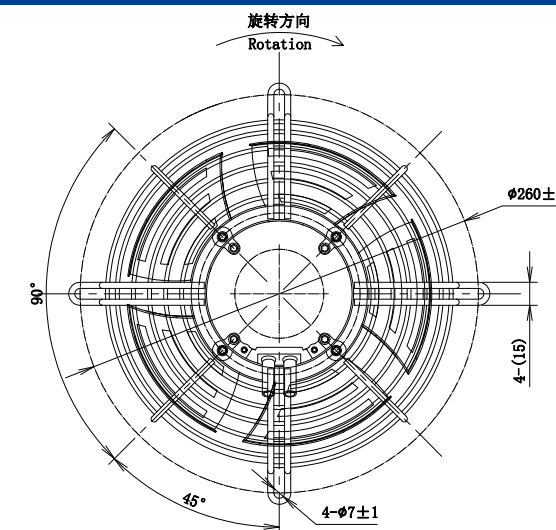

LWAE3G200ST-5PEW-04(Blowing)

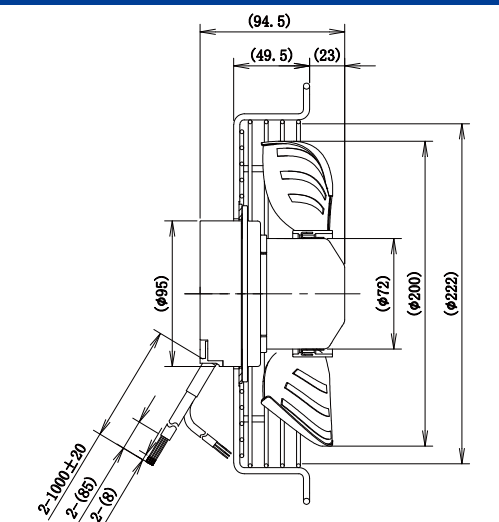

LWAE3G200SS-5PGW-05(Suction)

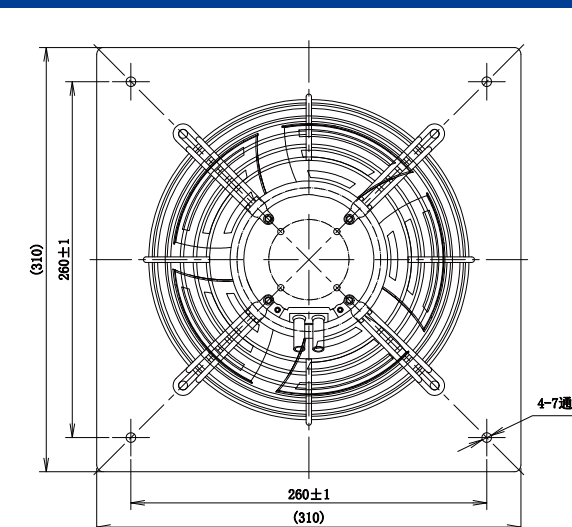

LWAE3G200ST-5PGW-06(Blowing)

