

LWAE-250 Serise


Product Characteristic

- Material : Sheet steel
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25 ℃ ~ +60 ℃
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection




Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G250SS-7MNW-01	220	50/60	0.9	135	3150	1751	69
LWAE3G250ST-7MNW-02	220	50/60	0.9	135	3150	1751	69
LWAE3G250SS-7MEW-03	220	50/60	0.9	135	3150	1751	69
LWAE3G250ST-7MEW-04	220	50/60	0.9	135	3150	1751	69
LWAE3G250SS-7MGW-05	220	50/60	0.9	135	3150	1751	69
LWAE3G250ST-7MGW-06	220	50/60	0.9	135	3150	1751	69

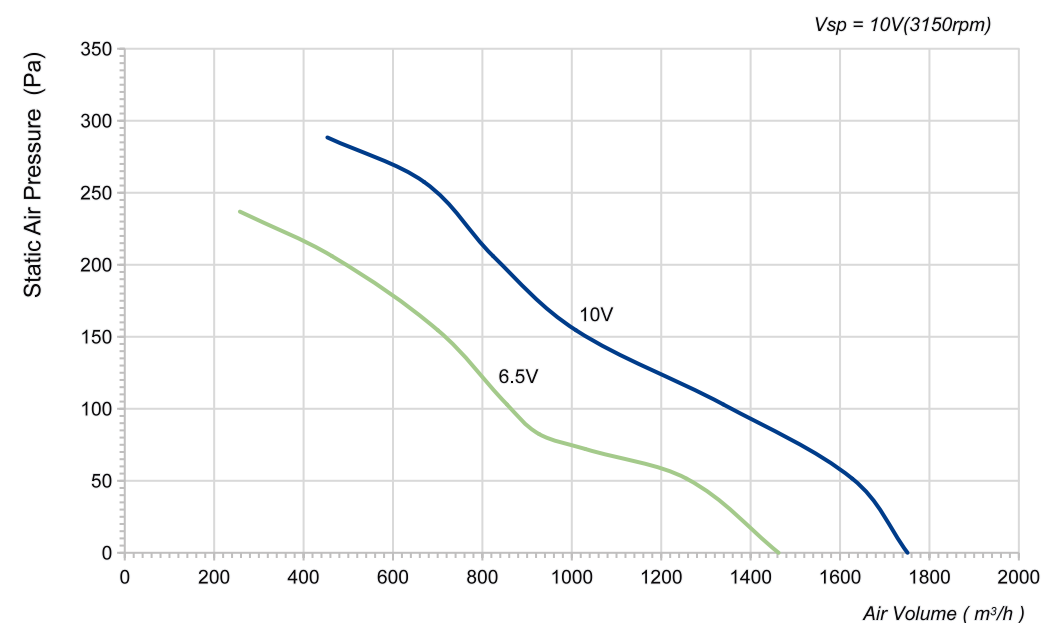


LWAE3G250SS-7MNW-01(Suction)

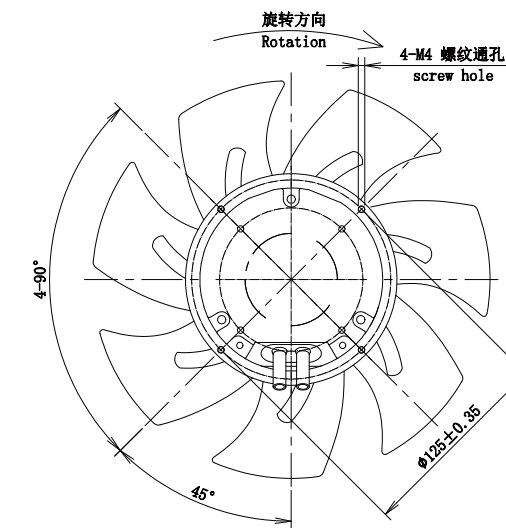


LWAE3G250ST-7MNW-02(Blowing)

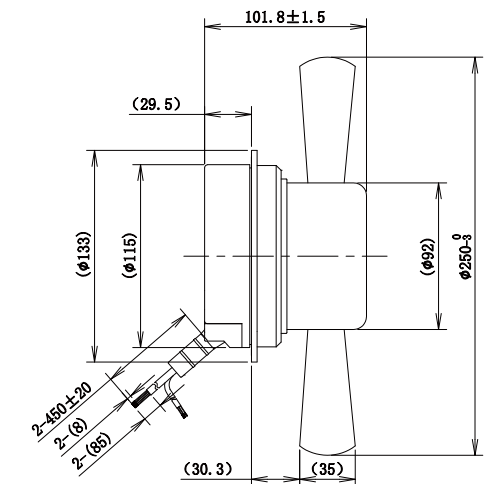


LWAE3G250SS-7MEW-03(Suction)

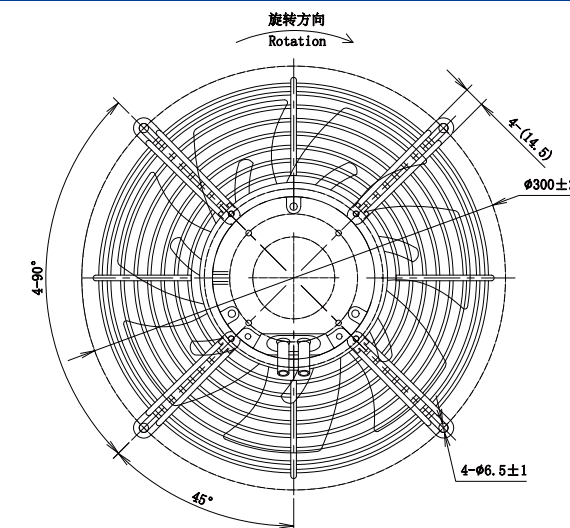

LWAE3G250ST-7MEW-04(Blowing)

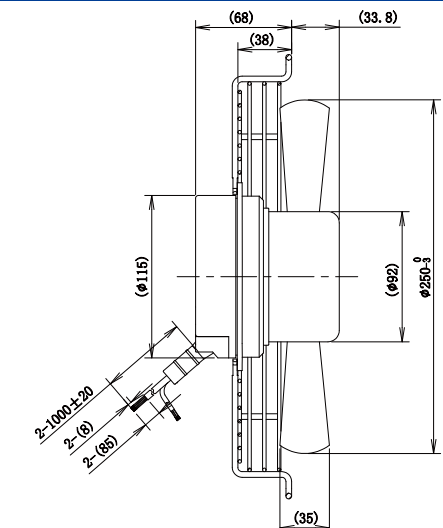

LWAE3G250SS-7MGW-05(Suction)

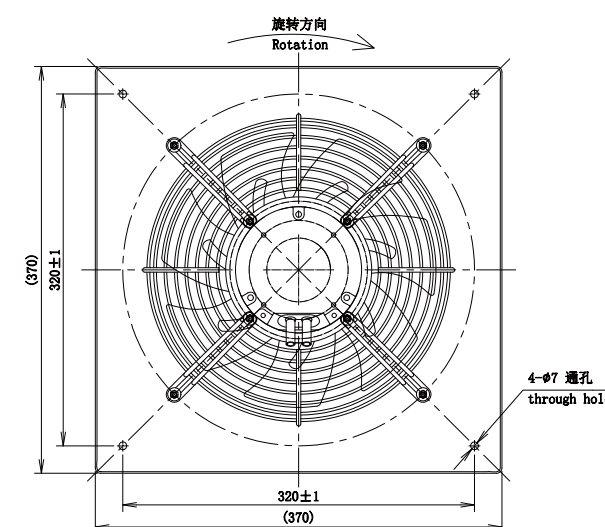

LWAE3G250ST-7MGW-06(Blowing)

