
LWAE-300 Serise



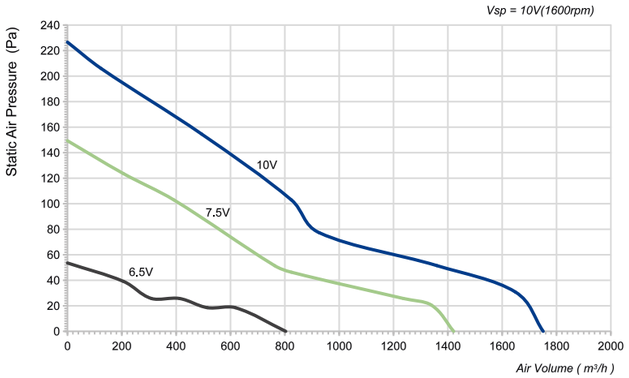


Product Characteristic


- Material : Sheet Steel
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G300SS-5MEW-07	220	50/60	0.7	90	1600	1751	59
LWAE3G300ST-5MEW-08	220	50/60	0.7	90	1600	1751	59

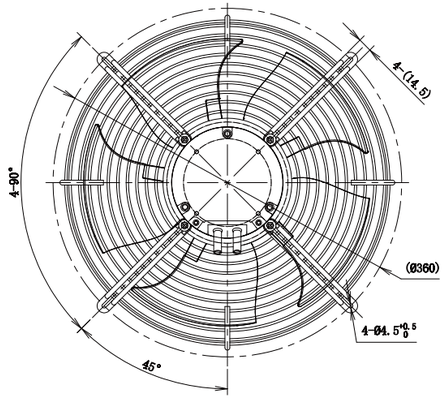

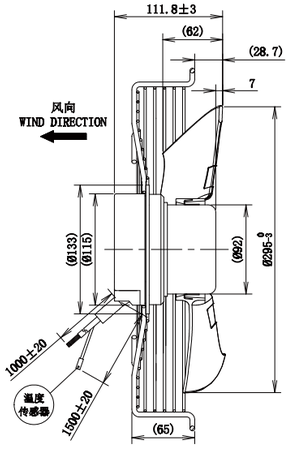

ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWAE-300 Serise

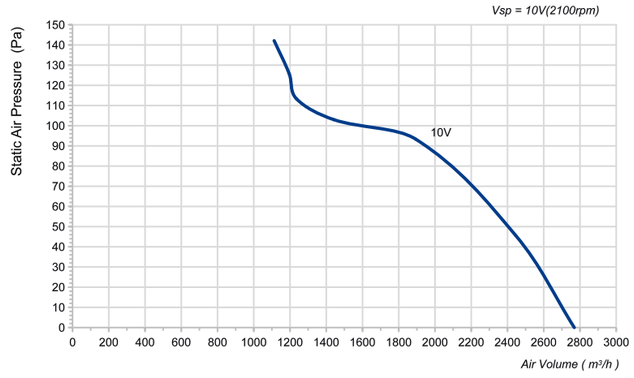




Product Characteristic


- Material : PA66
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G300SS-5PEW-09	230	50/60	0.87	126	2100	2781	65

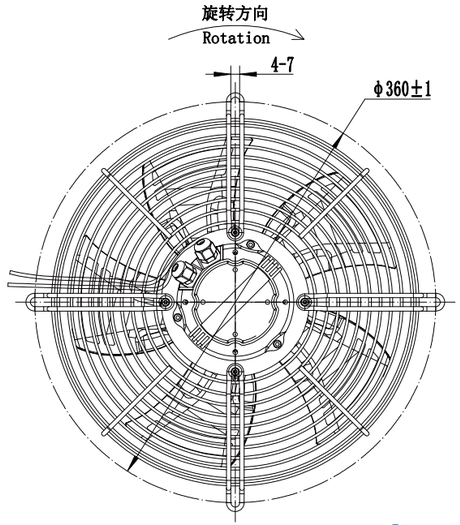

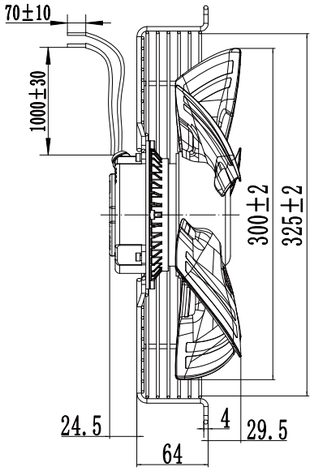

zakaz@ventilatorry.ru +7 (495) 133-95-09