

LWAE-300 Serise


Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25 °C ~ +60 °C
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection





Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G300SS-5PNW-01	220	50/60	1.1	165	2100	2575	64
LWAE3G300ST-5PNW-02	220	50/60	1.1	165	2100	2575	64
LWAE3G300SS-5PEW-03	220	50/60	1.1	165	2100	2575	64
LWAE3G300ST-5PEW-04	220	50/60	1.1	165	2100	2575	64
LWAE3G300SS-5PGW-05	220	50/60	1.1	165	2100	2575	64
LWAE3G300ST-5PGW-06	220	50/60	1.1	165	2100	2575	64

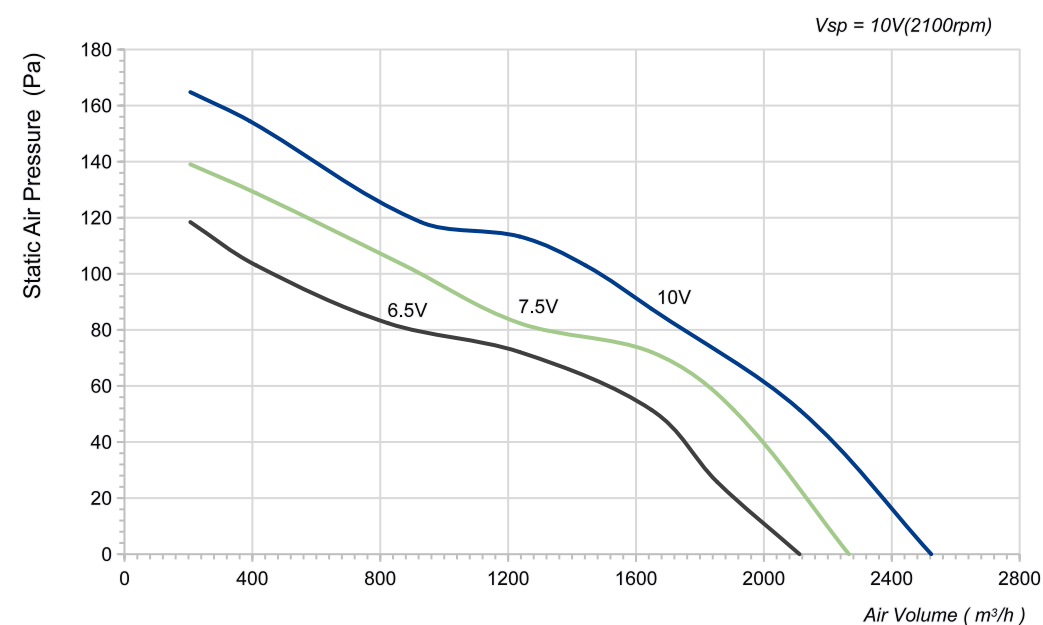



LWAE3G300SS-5PNW-01(Suction)

LWAE3G300ST-5PNW-02(Blowing)

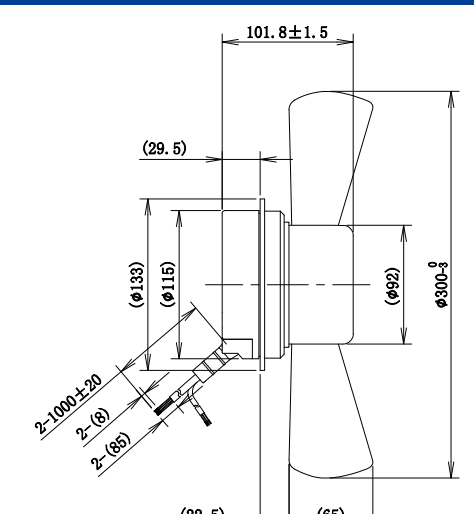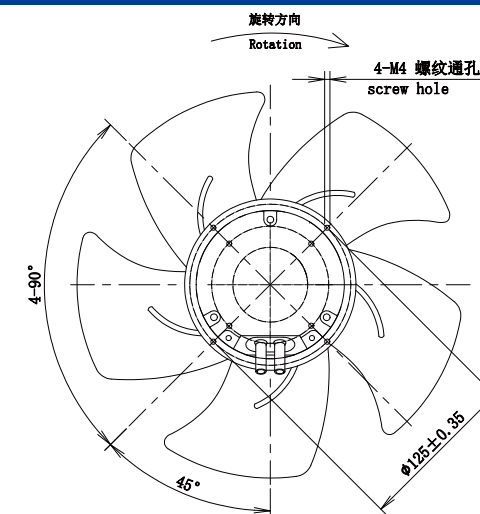

LWAE3G300SS-5PEW-03(Suction)

LWAE3G300ST-5PEW-04(Blowing)

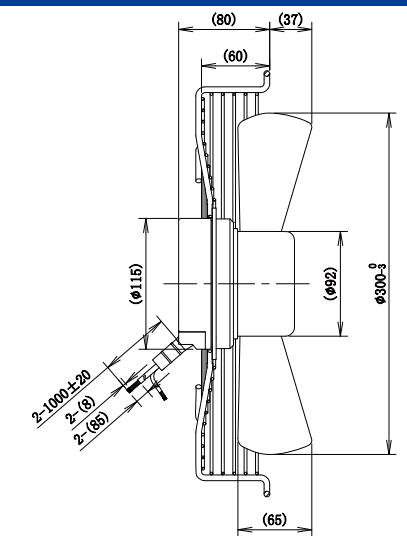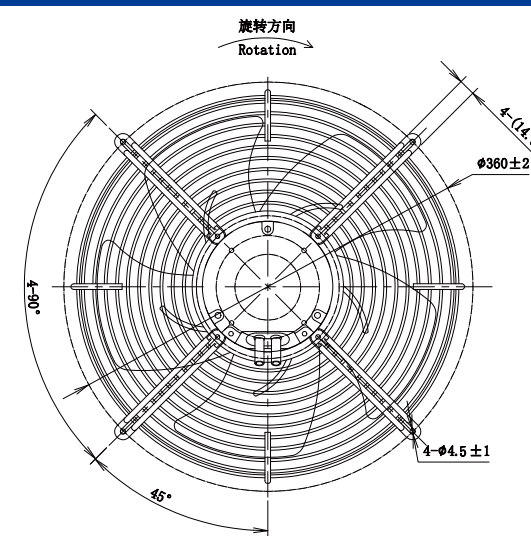

LWAE3G300SS-5PGW-05(Suction)

LWAE3G300ST-5PGW-06(Blowing)

