

LWAE-300 Serise


Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -25 ℃ ~ +60 ℃
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection





Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G300SS-5PNW-10	220	50/60	0.5	100	1600	1906	54
LWAE3G300ST-5PNW-11	220	50/60	0.5	100	1600	1906	54
LWAE3G300SS-5PEW-12	220	50/60	0.5	100	1600	1906	54
LWAE3G300ST-5PEW-13	220	50/60	0.5	100	1600	1906	54
LWAE3G300SS-5PGW-14	220	50/60	0.5	100	1600	1906	54
LWAE3G300ST-5PGW-15	220	50/60	0.5	100	1600	1906	54

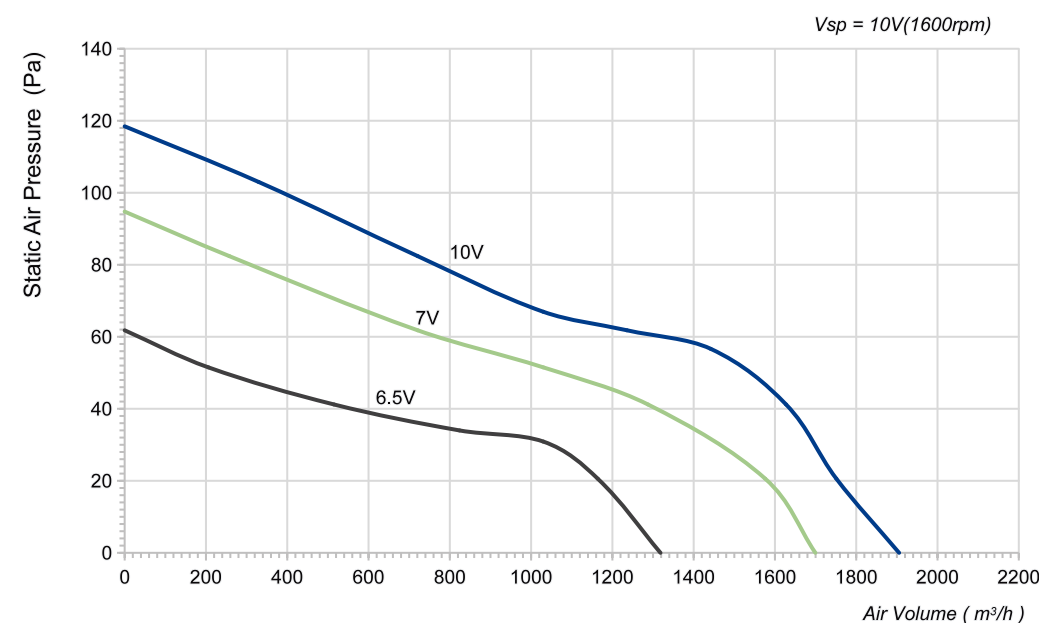



LWAE3G300SS-5PNW-10(Suction)

LWAE3G300ST-5PNW-11(Blowing)

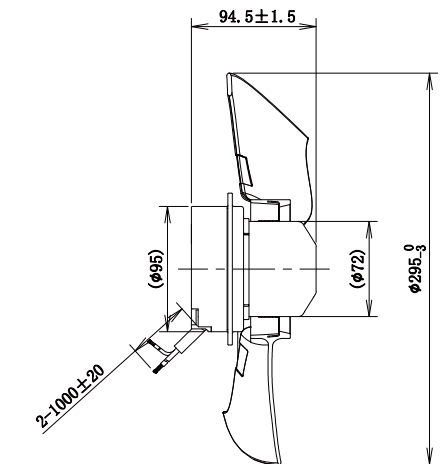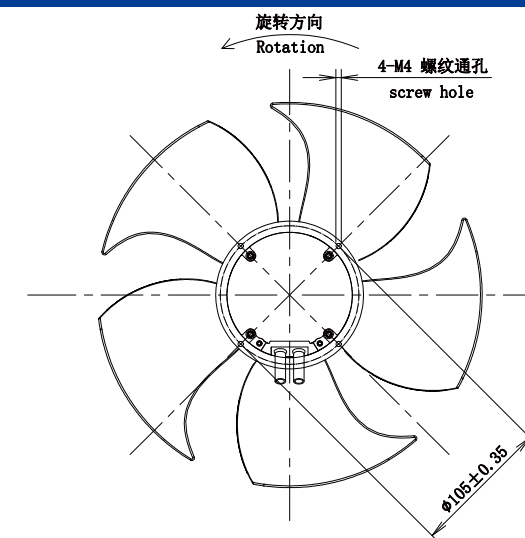

LWAE3G300SS-5PEW-12(Suction)

LWAE3G300ST-5PEW-13(Blowing)

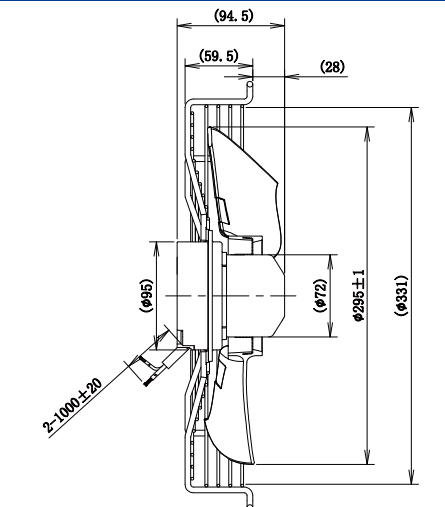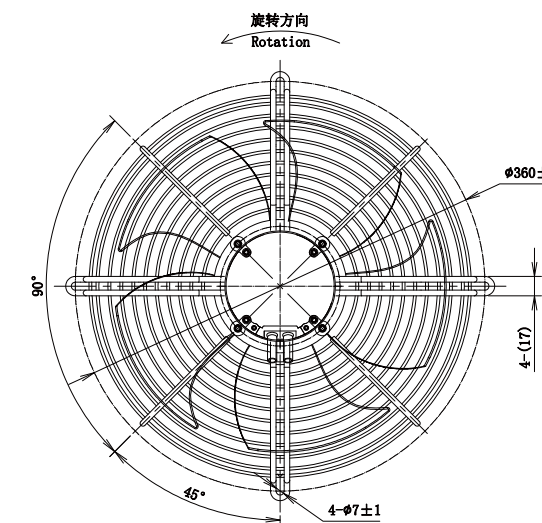

LWAE3G300SS-5PGW-14(Suction)

LWAE3G300ST-5PGW-15(Blowing)

