


LWAE-400 Serise




Product Characteristic

- Material : Sheet Steel
- Insulation Class: B
- Operation Temperature: -25 ℃ ~ +60 ℃
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM

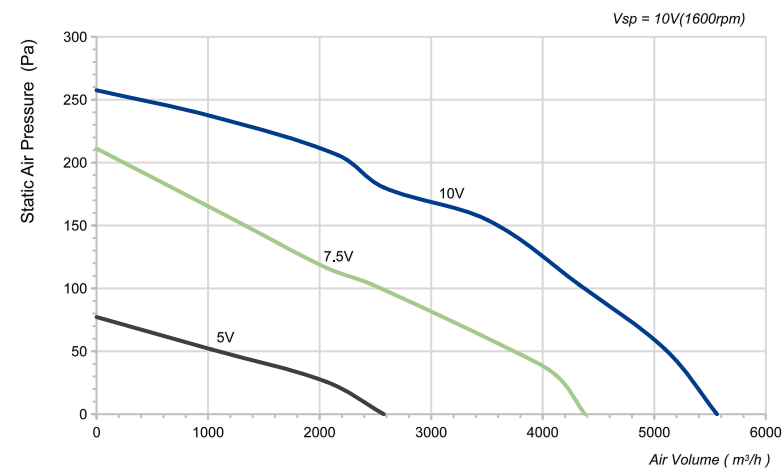


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G400SS-5MEW-07	220	50/60	1.6	360	1600	5562	67
LWAE3G400ST-5MEW-08	220	50/60	1.6	360	1600	5562	67

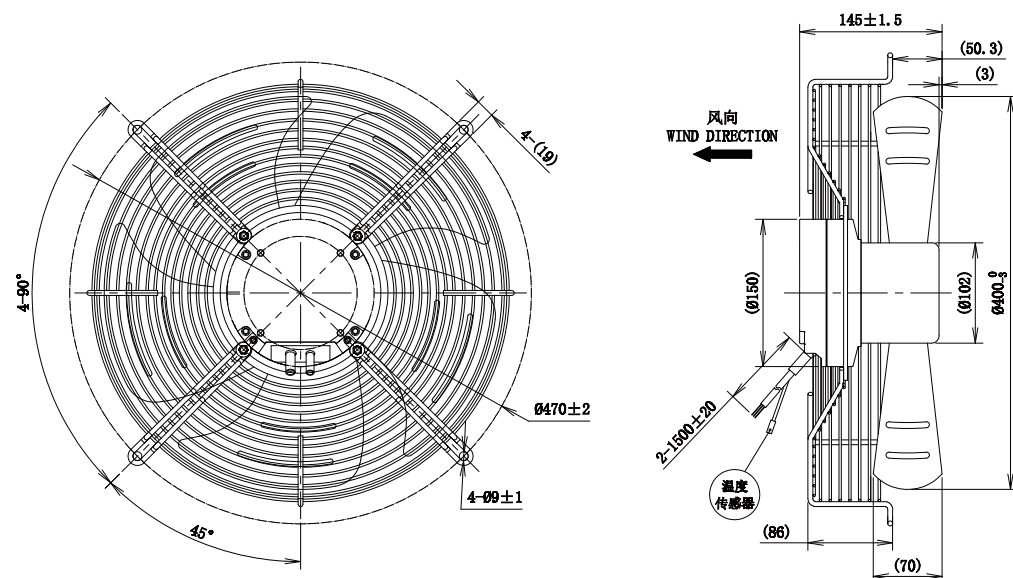

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAE-400 Serise

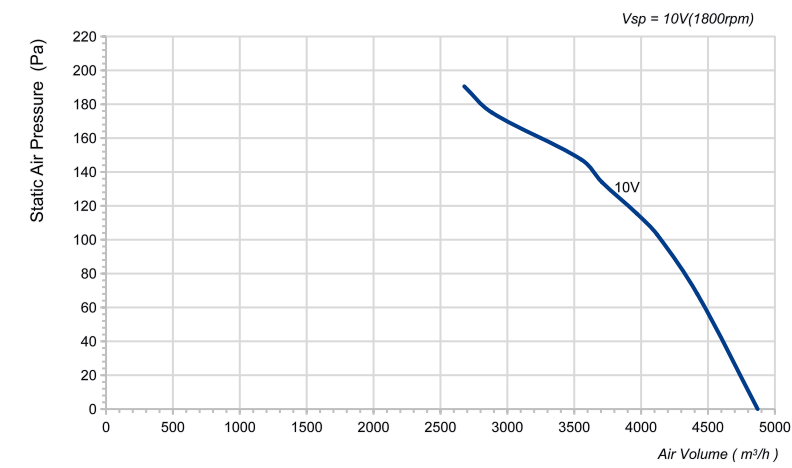


Product Characteristic

- Material : Sheet Steel
- Insulation Class: F
- Operation Temperature: -25 ℃ ~ +60 ℃
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G400SS-5MEW-09	230	50/60	1.17	264	1800	4871	66

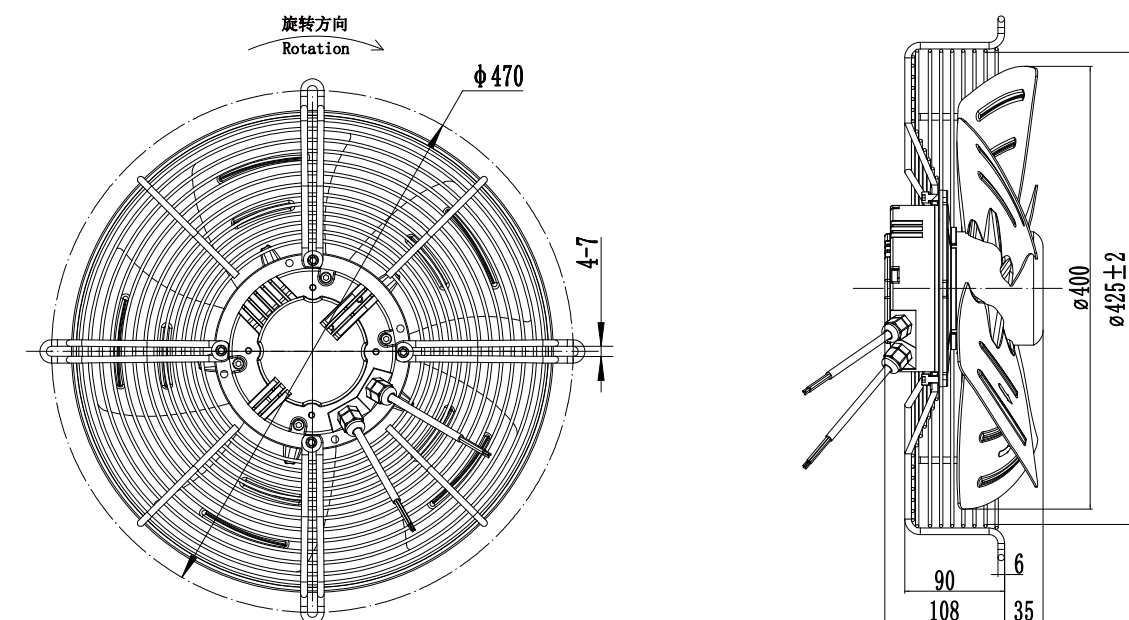

zakaz@ventilatorry.ru +7 (495) 133-95-09