


LWAE-450 Serise




Product Characteristic

- Material : PA66
- Insulation Class: B
- Operation Temperature: -20°C ~ +60°C
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP44
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM

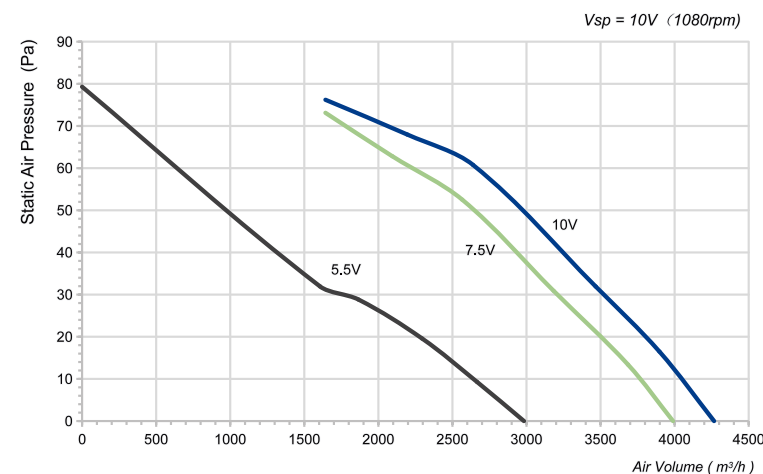


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G450SS-5PEW-10	220	50/60	0.72	100	1080	4266	52

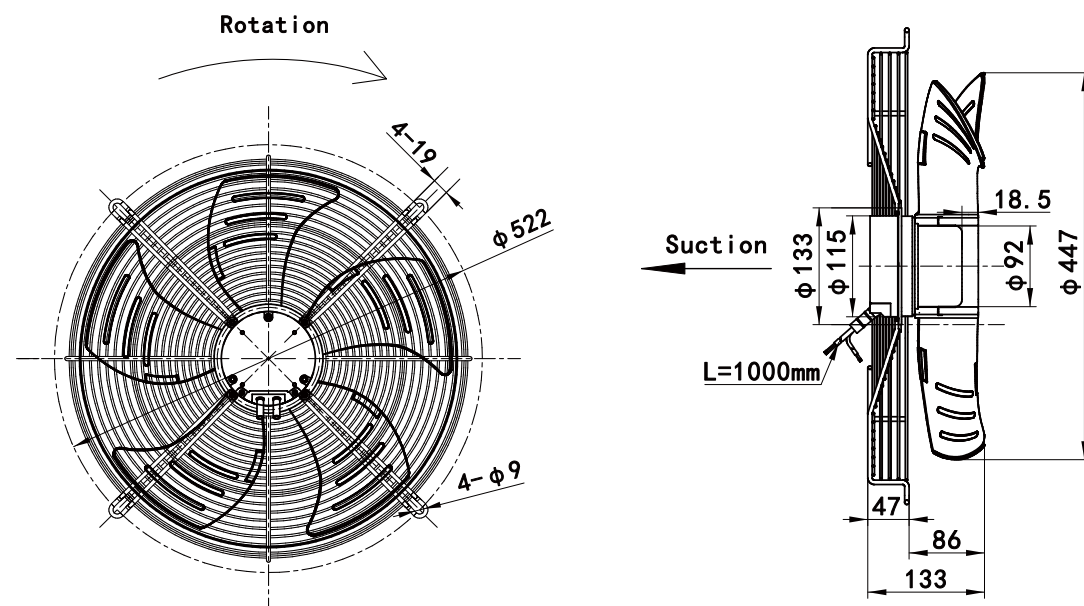

LWAE-500 Serise

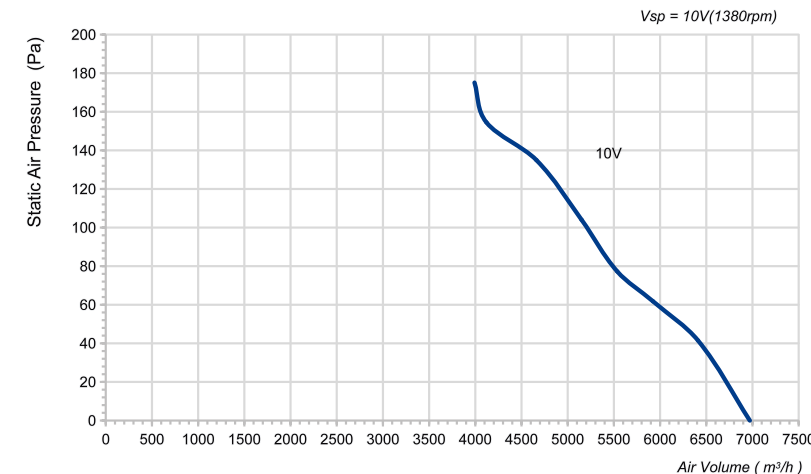

Product Characteristic

- Material : Sheet steel
- Insulation Class: F
- Operation Temperature: -25°C ~ +60°C
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500SS-5MEW-11	230	50/60	1.5	343	1380	6971	67

