
ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWAE-500 Serise



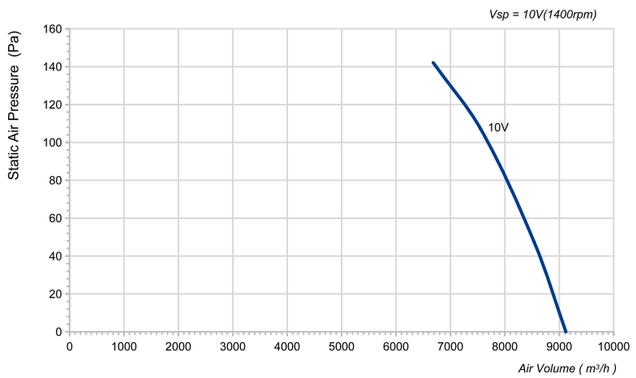


Product Characteristic

- Material : PA66
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25℃～+60℃
- Technical Features: Control input 0-10VDC/PWM/RS485
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications


Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500SS-5PKW-12	230	50/60	2.25	586	1400	9122	70

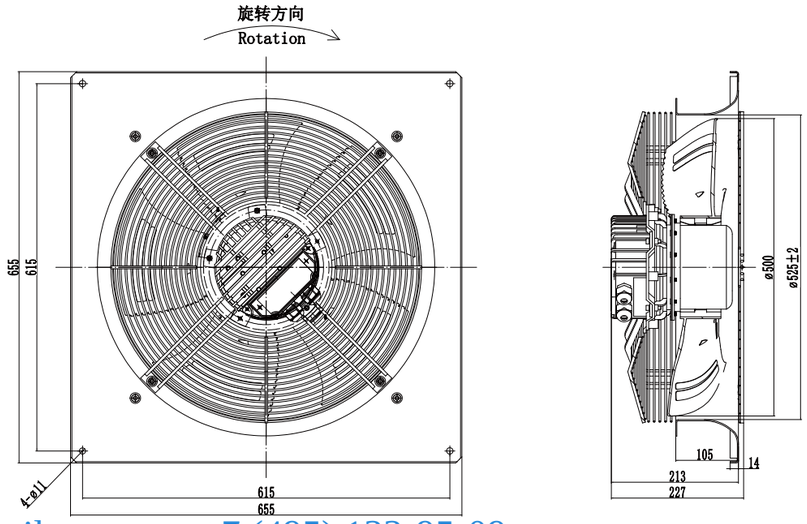

zakaz@ventilatorry.ru +7 (495) 133-95-09

ВЕНТИЛЯТОРЫ.RU
МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ
ventilatorry.ru

LWAE-500 Serise

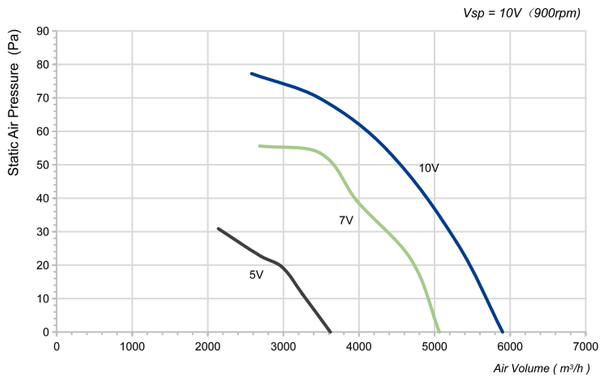




Product Characteristic


- Material : PA66
- Type of Protection: IP54
- Insulation Class: B
- Motor Type: BLEC Motor
- Operation Temperature: -20℃～+60℃
- Technical Features: Control input 0-10VDC/PWM/RS485
- Protection: Tach output,Locked-Rotor protection,Reverse Polarity,Over-voltage Protection,Soft Start Protection

CE RoHS ETL BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500SS-5PKW-15	230	50/60	1.4	200	900	5900	56

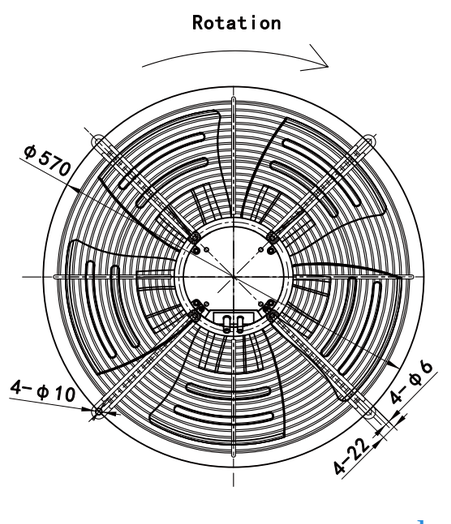

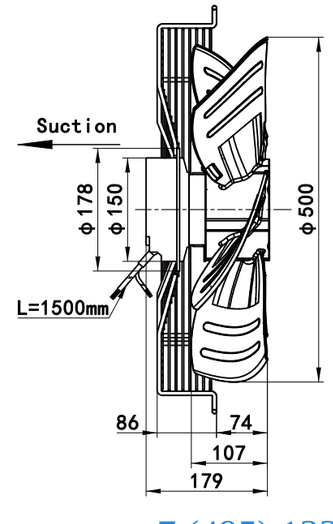

zakaz@ventilatorry.ru +7 (495) 133-95-09