

LWAE-500 Serise


Product Characteristic

- Material : Sheet steel
- Type of Protection: IP54
- Insulation Class: F
- Motor Type: BLEC Motor
- Operation Temperature: -25 ℃ ~ +60 ℃
- Technical Feature: Control input 0-10VDC/PWM, Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection





Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G500TS-5MNW-01	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TT-5MNW-02	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TS-5MEW-03	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TT-5MEW-04	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TS-5MKW-05	3-380	50/60	1.5	850	1690	10506	78
LWAE3G500TT-5MKW-06	3-380	50/60	1.5	850	1690	10506	78

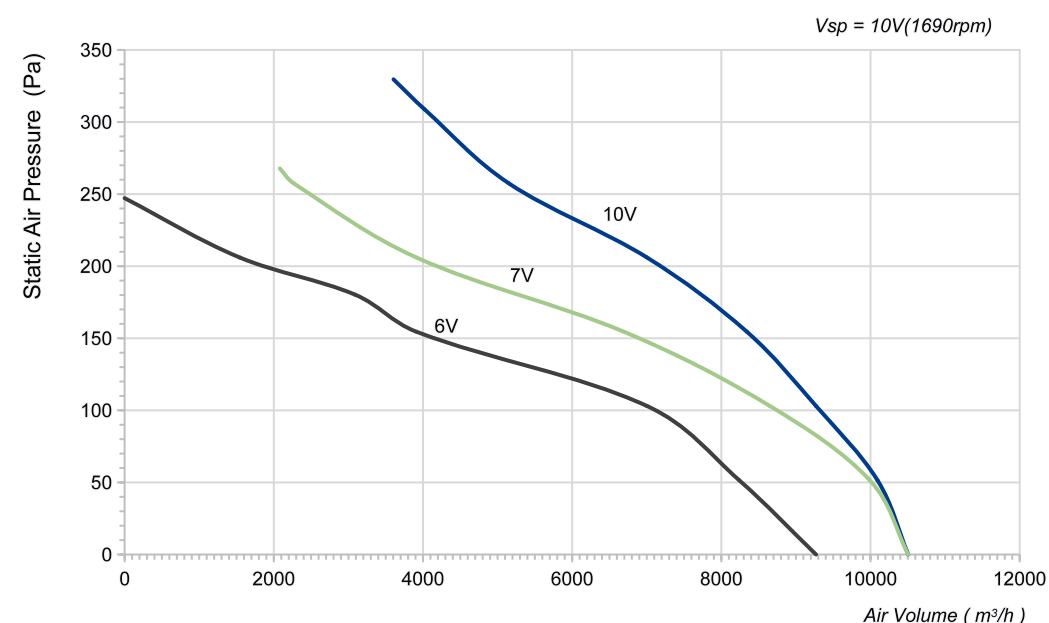



LWAE3G500TS-5MNW-01(Suction)

LWAE3G500TT-5MNW-02(Blowing)

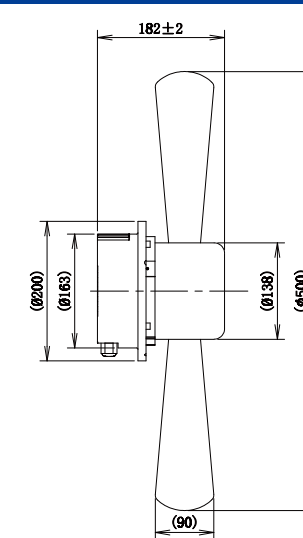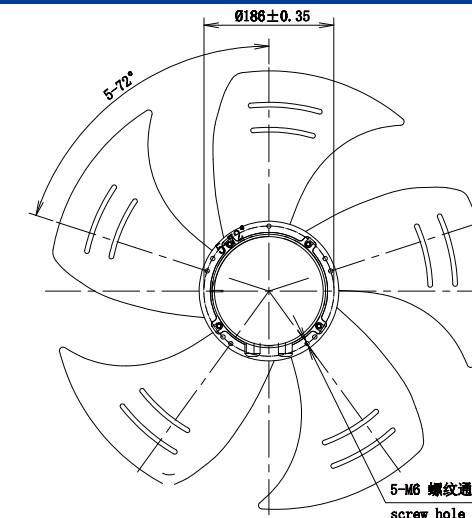

LWAE3G500TS-5MEW-03(Suction)

LWAE3G500TT-5MEW-04(Blowing)

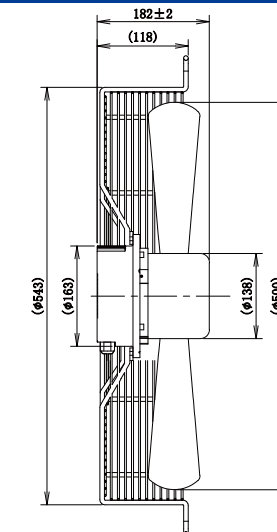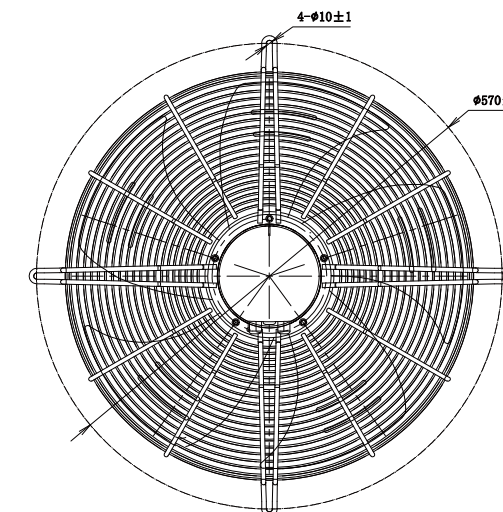

LWAE3G500TS-5MKW-05(Suction)

LWAE3G500TT-5MKW-06(Blowing)

