


LWAE-630 Serise




Product Characteristic

- Material : Aluminium alloy
- Insulation Class: F
- Operation Temperature: -25 ℃ ~ +60 ℃
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM

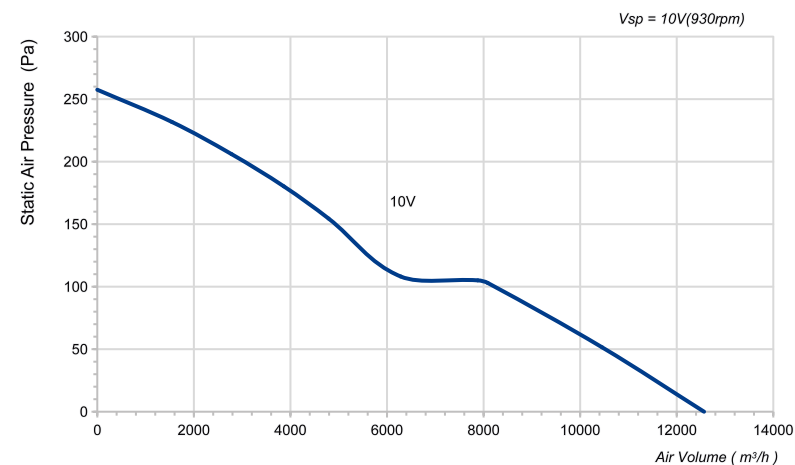


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G630TS-5MKW-09	3-380	50/60	1.15	580	930	12566	75

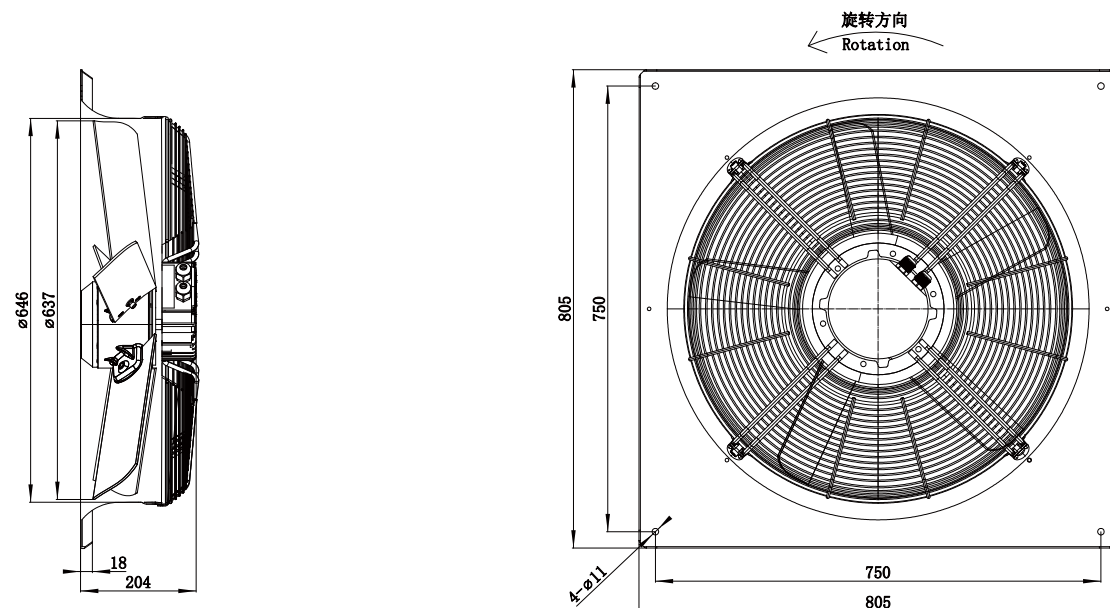

LWAE-630 Serise

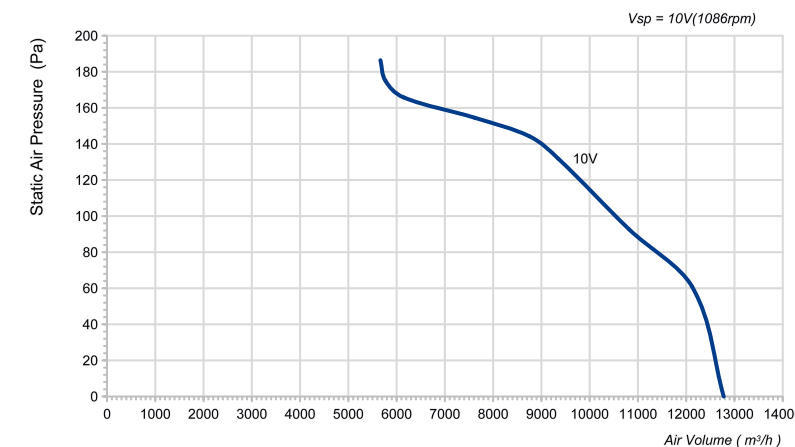

Product Characteristic

- Material : PA66
- Insulation Class: F
- Operation Temperature: -25 ℃ ~ +60 ℃
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM/RS485



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G630SS-5PKW-10	230	50/60	2.96	679	1086	12777	70

