


LWAE-710 Serise




Product Characteristic

- Material : Aluminium alloy
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM

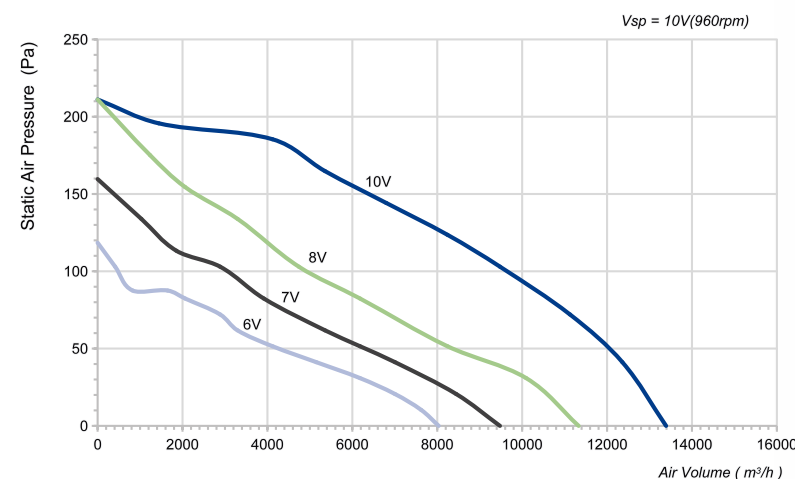


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G710TS-5MKW-02	3-380	50/60	1.3	650	960	13390	75

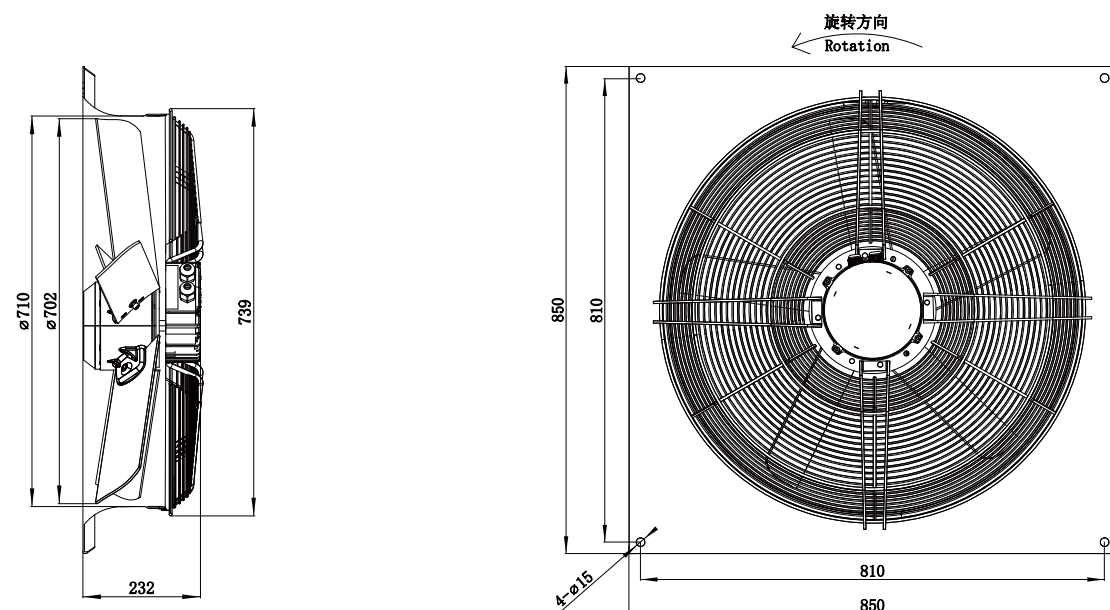

LWAE-710 Serise

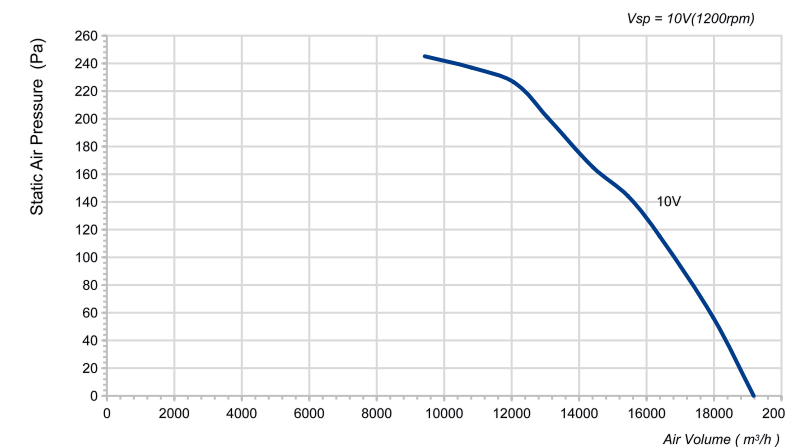

Product Characteristic

- Material : PA66
- Insulation Class: F
- Operation Temperature: -25 °C ~ +60 °C
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM/RS485



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G710TS-5PKW-03	400	50/60	1.97	1146	1200	19177	81

