


LWAE-800 Serise





Product Characteristic

- Material : PA66
- Insulation Class: F
- Operation Temperature: -25 ℃ ~ +60 ℃
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP54
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM/RS485

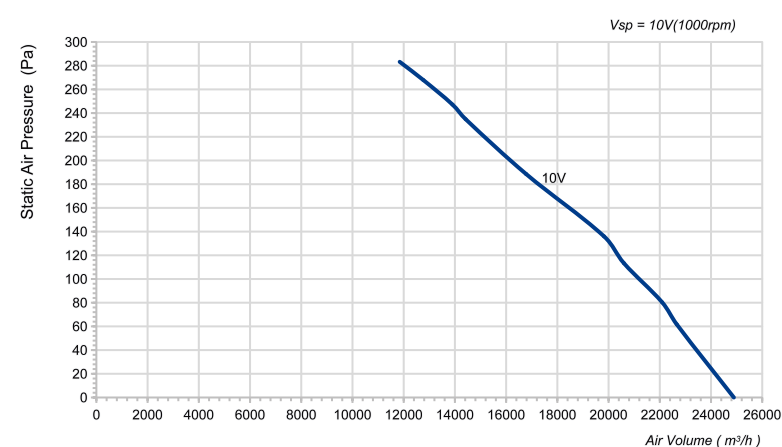


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G800TS-5PKW-03	400	50/60	2.67	1589	1000	24892	78

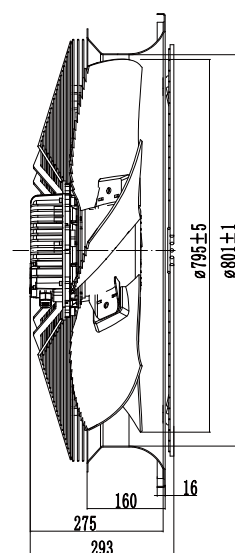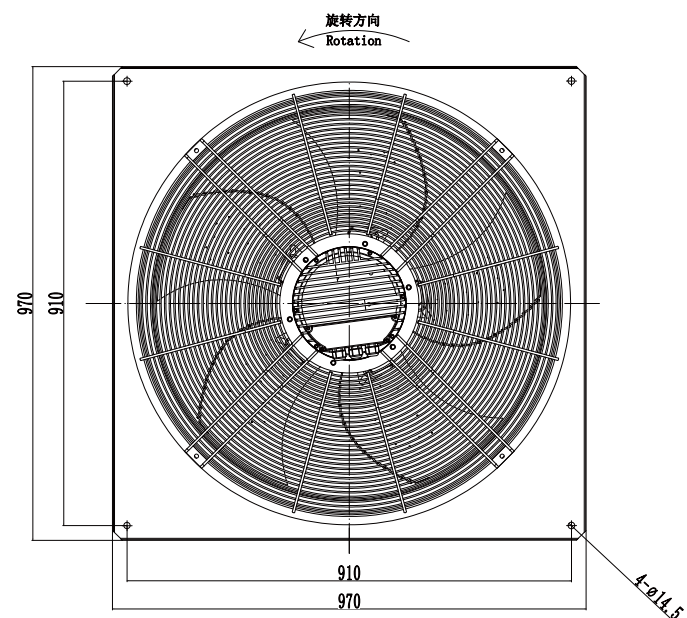

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWAE-800 Serise

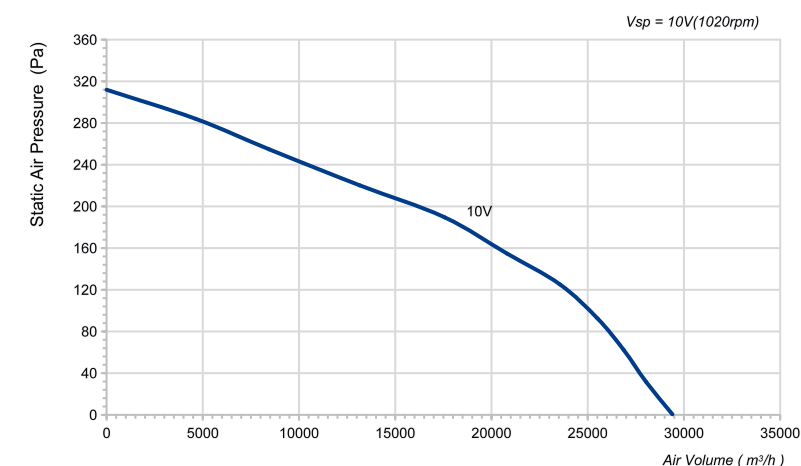

RECOMMEND


Product Characteristic

- Material : PA66
- Insulation Class: F
- Operation Temperature: -25 ℃ ~ +60 ℃
- Protection: Tach output, Locked-Rotor protection, Reverse Polarity, Over-voltage Protection, Soft Start Protection
- Type of Protection: IP55
- Motor Type: BLEC Motor
- Technical Features: Control input 0-10VDC/PWM/RS485



Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Current (A)	Power [W(@0Pa)]	Speed (RPM)	Air Volume (m³/h)	Noise [dB(A)]
LWAE3G800TS-4PKW-04	380	50/60	3.8	1799	1020	29400	/

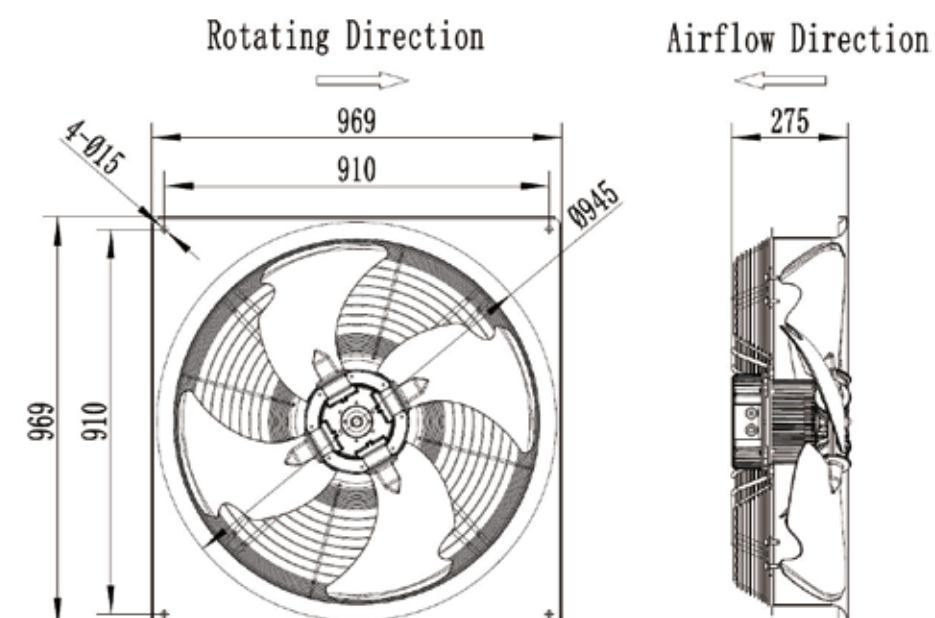

zakaz@ventilatorry.ru +7 (495) 133-95-09