



Aluminum Impeller(Outer rotor)

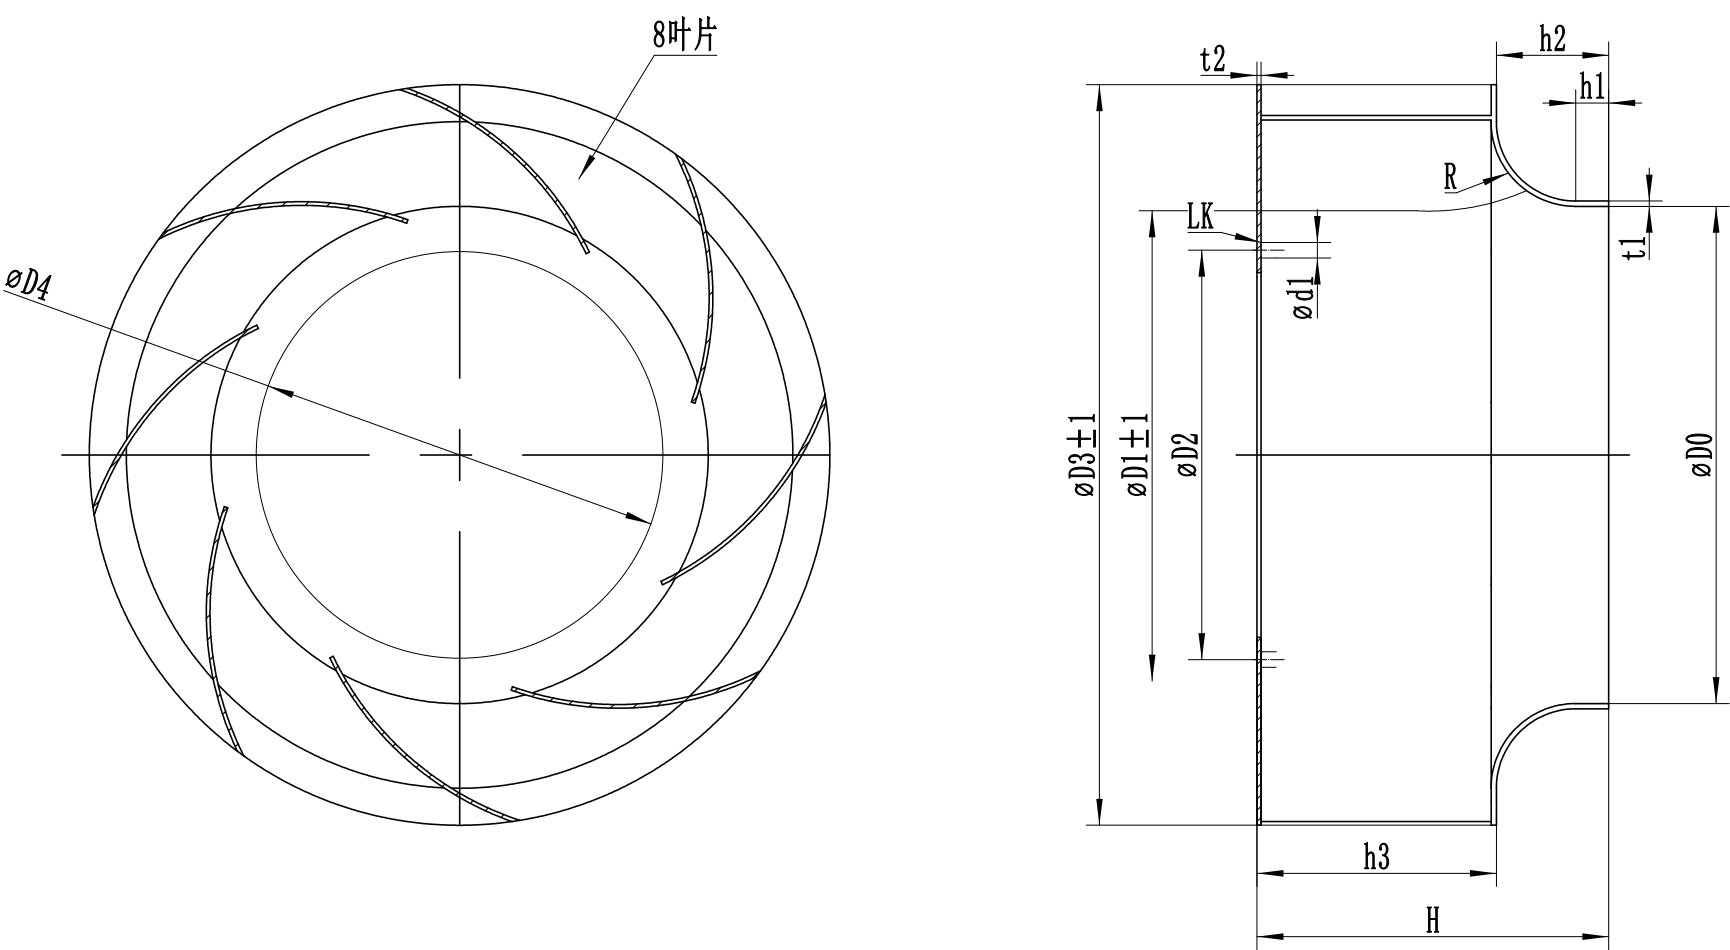

Technical Specifications

Model	D0	D1	D3	R	t2	t1	h3	h2	h1	H	D4	D2	d1
LWB-250/(80-127)-01	168	160	252	30	2	2	40-87	38	4.5	80-127	50.1-138.1	70-154	5.2-7
LWB-280/(96-133)-01	188	180	284	35	2-2.5	2	50-87	44	5.1	96-133	50.1-138.1	70-154	5.2-7
LWB-315/(80.5-171)-01	212-213.6	202	319	37	2-2.5	2	57-129	34-46	4.2	80.5-171	50.1-188.1	70-210	5.2-8.2
LWB-355/(120-192)-01	238	227	359	40	2-3	2	66-138	52	6.2	120-192	50.1-188.1	70-210	5.2-9
LWB-400/(120-185)-01	267	254	404	45	3	2	40-123	47-59	7.4	120-185	50.1-188.1	70-210	5.2-9
LWB-450/(131-209)-01	300	286	454	53	3	2.5	35-138	68	8.1	131-209	105.1-188.1	120-210	5.2-9
LWB-500/(114-249)-01	337	321	510	59	3-4	2.5	35-170	76	9.1	114-249	138.1-218.1	154-245	6.2-9.5
LWB-560/(122-262)-01	377	360	570	65	3	2.5	35-174	84	10	122-262	140.1-218.1	154-245	6.2-9.5
LWB-630/(256-293)-01	424	404	640	73	3	2.5	158-195	94	11	256-293	170.5-218.1	210-245	9-12
LWB-710/(293-360)-01	476	453	718	80	4	3	185-219	104	12.5	293-360	170.5-280.5	210-300	9-13

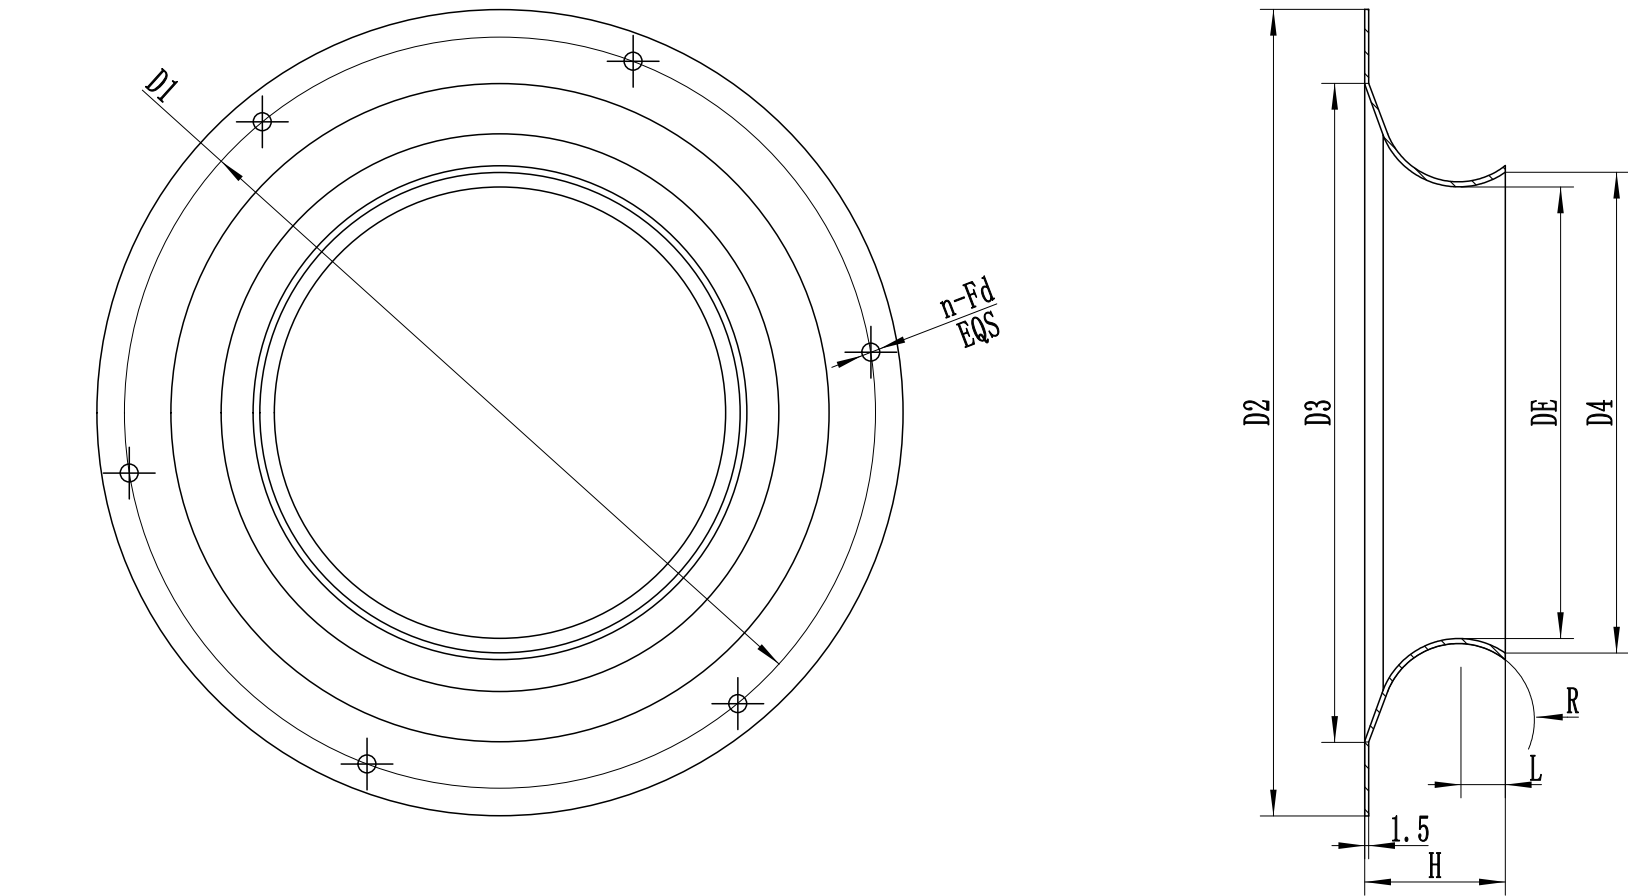

Model	R	L	H	$\phi D4$	$\phi D2$	D1	$\phi D3$	n	d	DE
225	23.5	13.1	46	163	280	259	225	6	7	155
250	26.5	14.8	52	183	307	286	250	6	7	174
280	30	17.3	59	206	348	320	282	8	9	195
315	32	19.8	67	232	382	356	317	8	9	219
355	37.5	21.8	76	260	422	395	355	8	11	248
400	42	24.7	81.5	293	464	438	400	8	11	277
450	47	34.8	97.5	324	519	490	450	8	11	310
500	53	31.7	105	369	564	540	500	8	11	348
560	60	30.7	114	412	640	610	560	8	14	390
630	67	41	135	466	710	674	630	8	14	438
710	75	46.9	154	524	785	751	710	8	14	491