


LWBA-315 Series


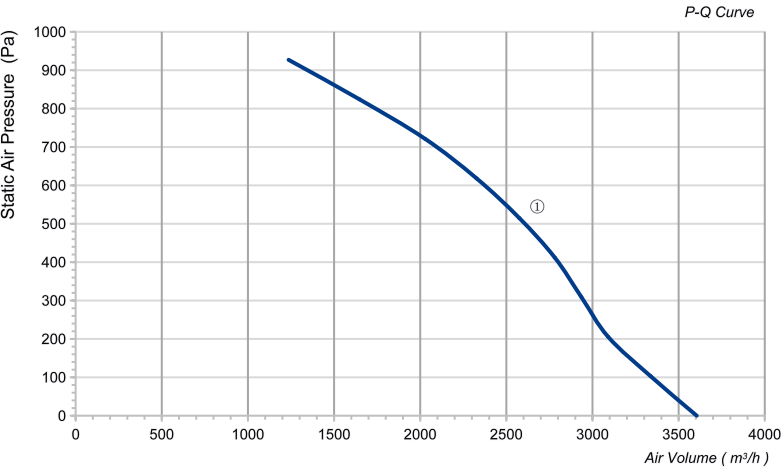


Product Characteristic

- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD


Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2D315-138NT-12	380	50	800	1.5	2750	3605	927	84	/	①

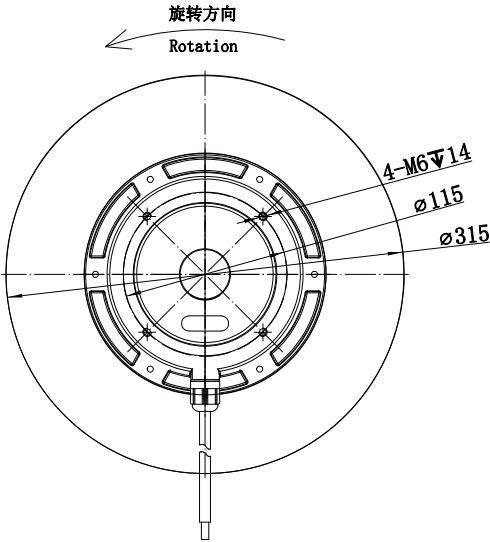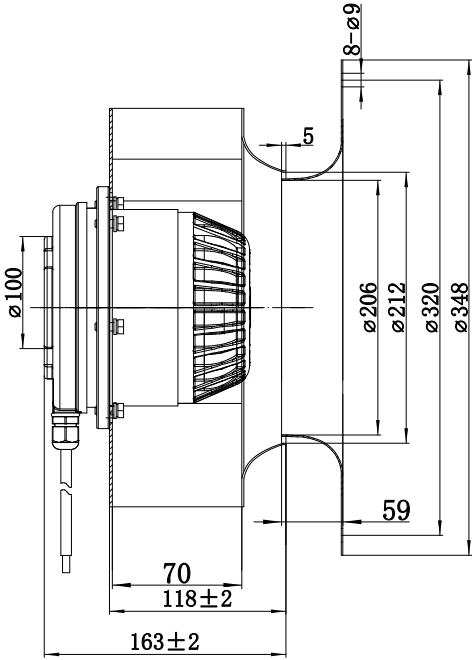

zakaz@ventilatorry.ru +7 (495) 133-95-09

LWBA-315 Series


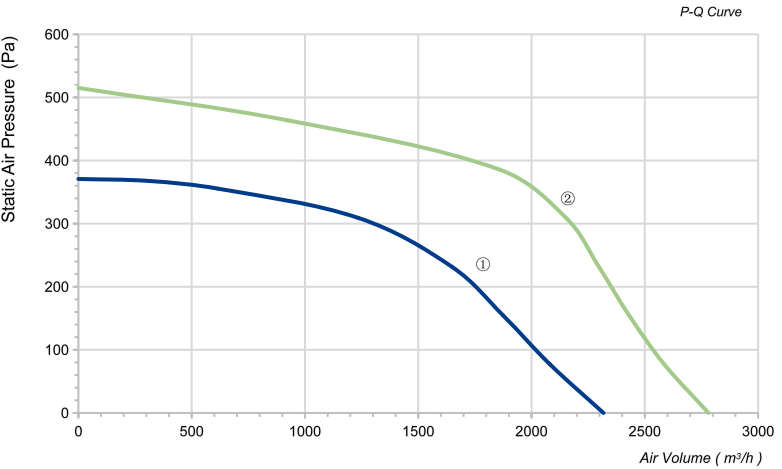


Product Characteristic

- Impeller Material: Aluminum Alloy
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 C ~ +65 C
 - Type of Protection: IP54
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS BSCI ISO ENEC LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA4E315-138NS-13	230	50	220	1.2	1450	2318	371	64	10uF	①
LWBA4E315-138NS-14	230	60	300	1.5	1650	2781	515	68	10uF	②
LWBA4D315-138NT-15	380	50	220	0.65	1450	2318	371	64	/	①
LWBA4D315-138NT-16	380	60	300	0.7	1650	2781	515	68	/	②

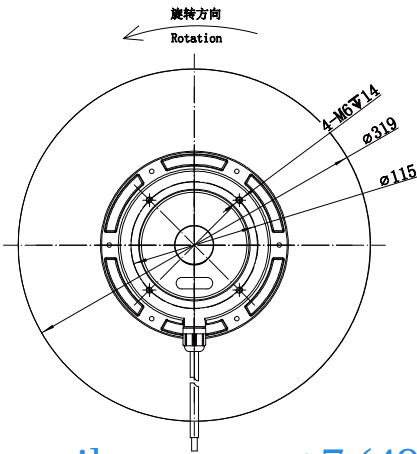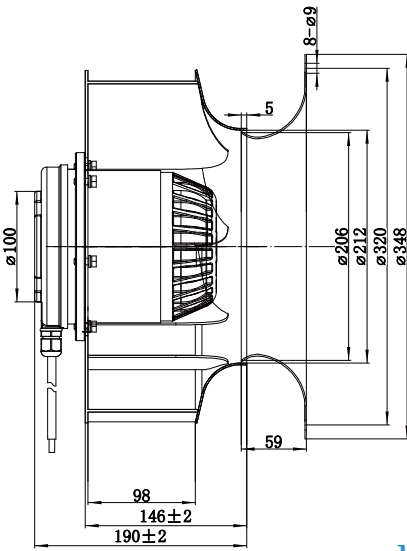

zakaz@ventilatorry.ru +7 (495) 133-95-09