


LWBA-133 Series

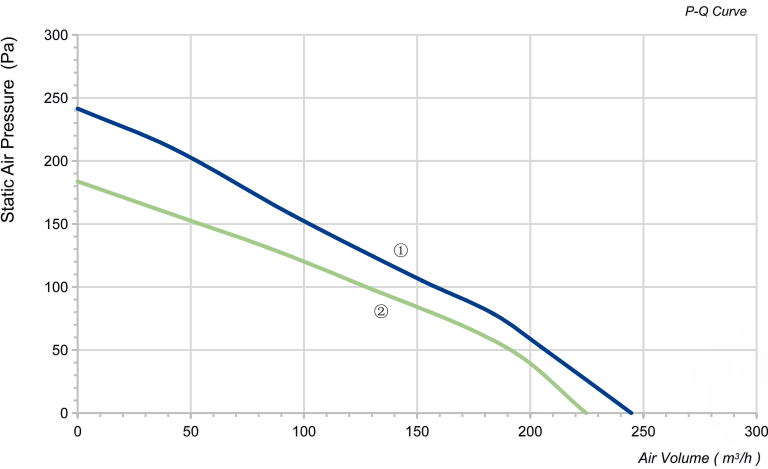


Product Characteristic


- Impeller Material: Plastic PA66
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 °C ~ +65 °C
 - Type of Protection: IP44
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS ENEC BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E133-072NS-01	230	60	33.2	0.14	3070	245	242	58.7	1uF	①
LWBA2E133-072NS-02	230	50	27.8	0.12	2720	225	184	57.9	1uF	②

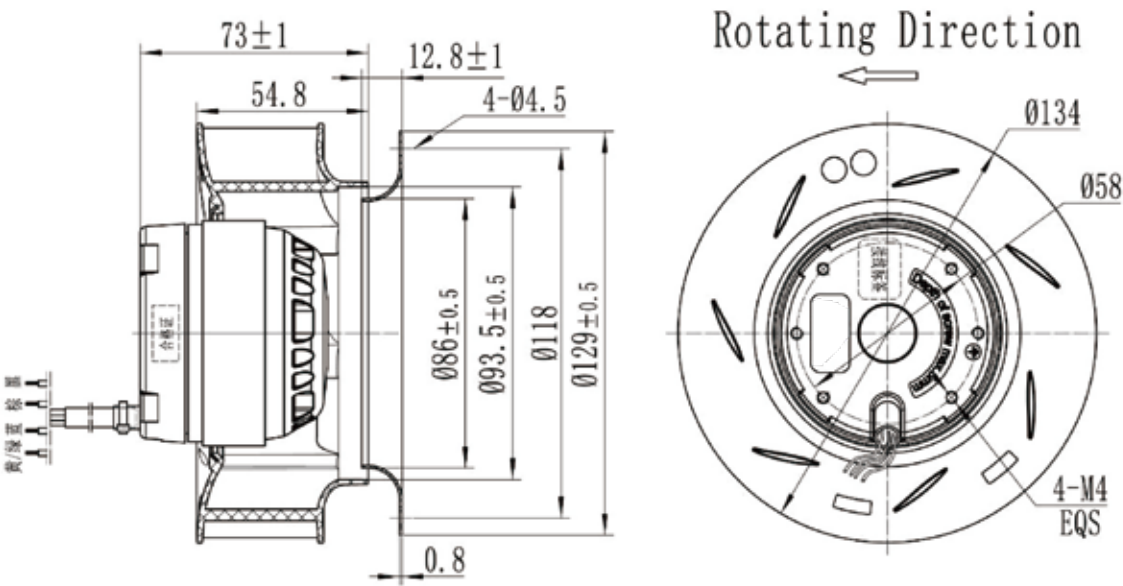

LWBA-155 Series

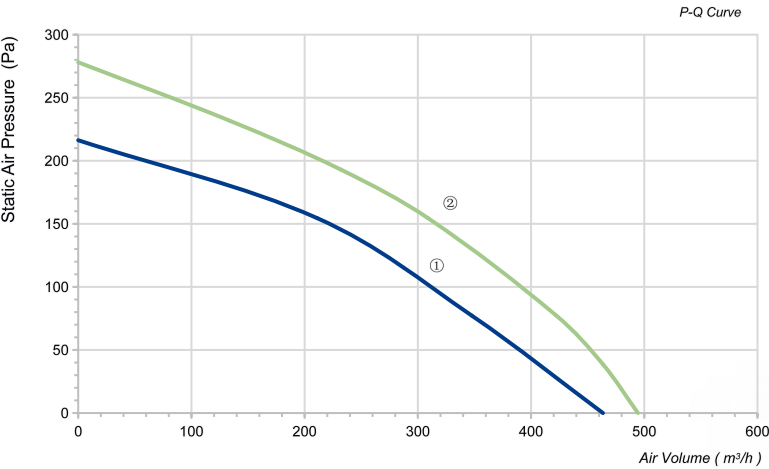

Product Characteristic

- Impeller Material: Plastic PA66
 - Direction of Rotation: Clockwise, seen on rotor
 - Mode of Operation: S1
 - Operation Temperature: -40 °C ~ +65 °C
 - Type of Protection: IP44
 - Insulation Class: F
 - Bearing: Maintenance-free ball bearings
- CE RoHS ENEC BSCI ISO EAC UL LVD

Technical Specifications

Model	Voltage (V)	Frequency (Hz)	Power (W)	Current (A)	Speed (RPM)	Air Flow (m³/h)	Air Pressure (Pa)	Noise [dB(A)]	Capacitor	Curve
LWBA2E155-092NS-01	230	50	32	0.24	2650	464	216	61	1uF	①
LWBA2E155-092NS-02	230	60	38	0.32	3000	494	278	64	1uF	②

